© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

BREAKOUTS/TRANSITIONS

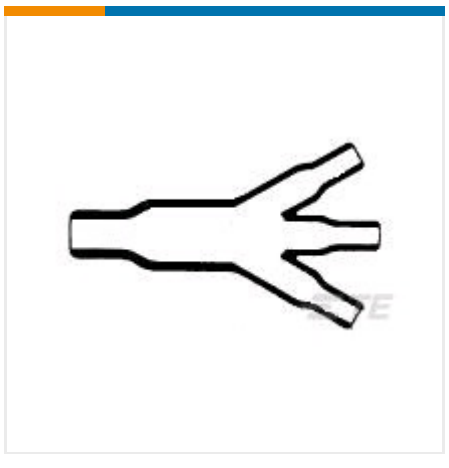

✔ Active

TE CONNECTIVITY (TE)

462W023-25/225-0

Raychem | CAP , CRPS

462W023-25/225-0
TE Internal Number: 059431-000
Alias ID: 9-1190450-7

EU RoHS Compliant
EU ELV Compliant

Molded Part Shape One to Three Cables

Wire/Cable OD (mm) 11, 12, 14, 16

Wire/Cable OD (in) .43, .47, .55, .63

Wire/Cable Main Branch OD (mm) 10, 11, 7, 8, 9

Wire/Cable Main Branch OD (in) .28, .31, .35, .39, .43

Wire/Cable Sm Branch OD (mm) 10, 11, 7, 8, 9

Wire/Cable Sm Branch OD (in) .28, .31, .35, .39, .43

Operating Temperature Range -75 – 150 °C [-103 – 302 °F]

PRODUCT DRAWING
English

DOCUMENTATION

Product Drawings

Customer Drawing
PDF
English

Product Environmental Compliance

Safety Data Sheet

Unicure 225 Adhesive
PDF
English

Downloaded from Arrow.com.

Unicure 225 Adhesive

PDF

French

Unicure 225 Adhesive

PDF

German

Unicure 225 Adhesive

PDF

Italian

Unicure 225 Adhesive

PDF

Spanish

Unicure 225 Adhesive

PDF

Swedish

Unicure 225 Adhesive

PDF

Dutch

Unicure 225 Adhesive

PDF

Danish

EPS Heat Shrinkable Polymeric Products

PDF

French

EPS Heat Shrinkable Polymeric Products

PDF

Italian

EPS Heat Shrinkable Polymeric Products

PDF

Danish

EPS Heat Shrinkable Polymeric Products

PDF

English

EPS Heat Shrinkable Polymeric Products

PDF

German

EPS Heat Shrinkable Polymeric Products

PDF

Norwegian

EPS Heat Shrinkable Polymeric Products

PDF

Spanish

EPS Heat Shrinkable Polymeric Products

PDF

Swedish

EPS Heat Shrinkable Polymeric Products

Downloaded from Arrow.com.

PDF

Dutch

FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

Molded Part Shape One to Three Cables
Product Type Molded Part
Molded Part Type Transition
Size Code 23

Configuration Features

Number of Branches/Legs 3

Body Features

Material Systems Code 25
Adhesive Pre-Coat Yes
Transition Type 1 to 3 Cables
Material Modified Elastomer
Material Code 25

Dimensions

Inside Diameter Range (Body) 10 – 25 mm [.394 – .984 in]
Inside Diameter Range (Leg 1) 5.99 – 13 mm [.236 – .512 in]
Inside Diameter Range (Leg 2) 5.99 – 13 mm [.236 – .512 in]
Inside Diameter Range (Leg 3) 5.6 – 13.2 mm [.22 – .52 in]

Usage Conditions

Operating Temperature Range -75 – 150 °C [-103 – 302 °F]
Resistant To Fluids

Operation/Application

Power Cable Accessory No

Industry Standards

Government Qualified No

Other

Downloaded from Arrow.com.

Wire/Cable OD (mm) 11, 12, 14, 16
Wire/Cable OD (in) .43, .47, .55, .63
Wire/Cable Main Branch OD (mm) 10, 11, 7, 8, 9
Wire/Cable Main Branch OD (in) .28, .31, .35, .39, .43
Wire/Cable Sm Branch OD (mm) 10, 11, 7, 8, 9
Wire/Cable Sm Branch OD (in) .28, .31, .35, .39, .43
Fluid/Chemical Resistance Long-term exposure at elevated temps
Special Requirements Flame Retarded
Adhesive Options /225 Precoat
Adhesive Type Unicure Pre-Coated Epoxy Adhesive
Comment Use only with DR-25 tubing.
Adhesive Code 225

PRODUCT COMPLIANCE

Statement of Compliance

Statement of Compliance
PDF

Downloaded from Arrow.com.