
Data Sheet

Coaxial Cable Connector
25_SMA-50-3-15/111_N

Description

Straight panel cable jack, flange mount

Interface standards
IEC 60169-15_MIL-STD-348A/310_CECC 22110

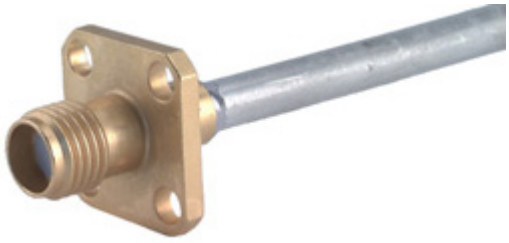

Technical Data

Electrical Data

Impedance	50 Ω
Interface frequency max.	18 GHz

Mechanical Data

Centre contact	soldered
Outer contact	soldered
Weight	0.0022 kg

Environmental Data

Operating temperature	-65 °C to 165 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	

Related Documents

Catalogue drawing	DCA-00009021
Assembly instruction	DOC-0000179086
Mounting hole	DOU-00008784

Ordering Information

Single package	25_SMA-50-3-15/111_NE
Bulk 100 pcs package	25_SMA-50-3-15/111_NH

Additional Information

Suitable cables	EZ_141_TP_M17, SUCOFORM_141, MULTIFLEX_141

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general information purposes only.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Huber+Suhner:

12535682 Minibend L-10 RG_196_A/U 1399.17.0231 84118385 G032D/BNCm/BNCm/1000
MINIBEND R-12 24_SMA-50-2-15/111_NH 12012090 23000457 23002145 6601_PC185-50-1/199_NE
MINIBEND R-10 RADOX 125 0.75 MMÃ² RED 11_SMC-50-2-10/111_NE 11_TNC-50-3-116/133_NE
16_MMCX-50-2-4/111_OH 85201112 1399.31.0020 22511964 6620_SMA-50-2/199_NE G_03130_HT-01
MINIBEND R-8 11MMBXEF31616MMBX/300 1399.17.0210 6806.19.A 33_PC24-SK-50-2/199_NE 84093961
G032D/Nm/SMAm/1000 PCRS_LCMX_LCMX_O421T_30.0_LL