



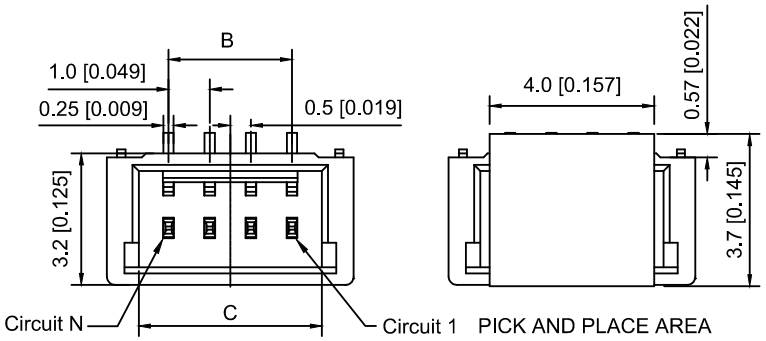


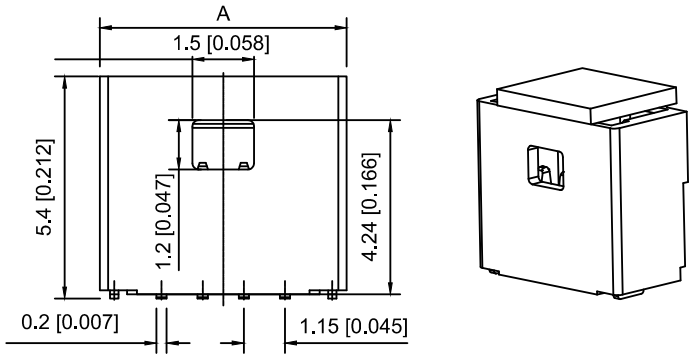


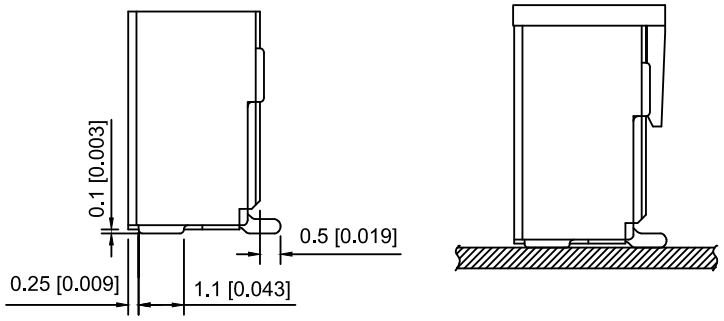


X1004WVS-XXAHF-4TSW
02~05Pin

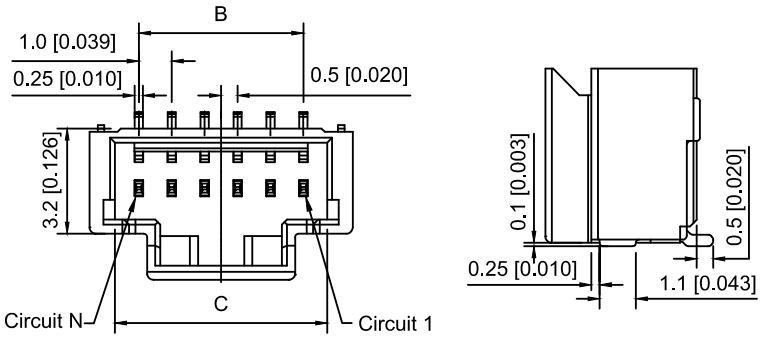

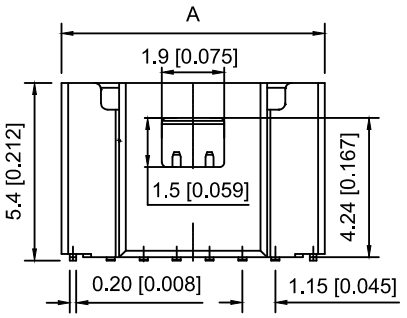


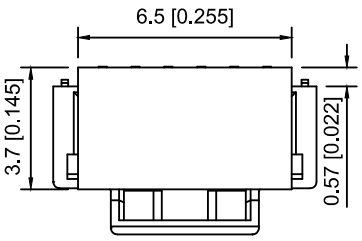

PICK AND PLACE AREA
WITH CAP

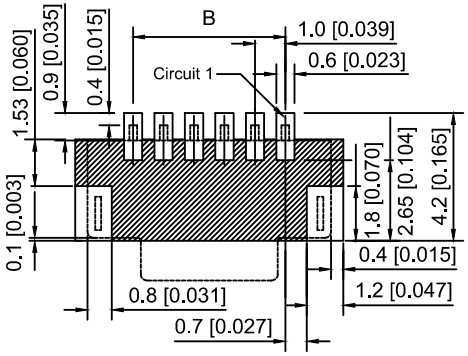

Recommended PCB Layout:±0.05

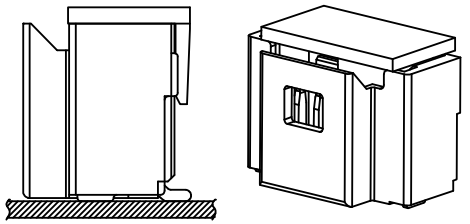

X1004WVS-10AHF-4TSW
06~15Pin

Specifications:
规格：
Voltage rating:100V AC/DC
额定电压：100V AC/DC
Current rating:1A AC/DC
额定电流：1A AC/DC
Withstanding voltage:300V AC/minute
耐受电压：300V AC/分钟
Temperature range:-40℃-+105℃
温度范围：-40℃-+105℃
Insulation resistance:≥100MΩ
绝缘电阻：≥100MΩ
Contact resistance:≤20mΩ
接触电阻：≤20mΩ

X1004 W V S - 10 A HF - 4T SW
① ②③④ ⑤⑥⑦ ⑧ ⑨

1.Series No
2.Category:W-Wafer
3.Welding Board Angle：V-Stright 180°
4.Welding Way:S-SMT
5.Row No.Pin No:XX-02-15 Pin
6.Special No:A-Inner Lock
7.HF-Halogen Free
8.Material:4T-PA4T UL94V-0
9.Plating:SW-Matte Tin Plating 100u" Min.overall, Ni 50u"Min.under Plating
V01-Gold Flash overall,Ni 50u Min under Plating

Poles	Dimensions(mm)		
	A	B	C
02	4.00	1.00	2.45
03	5.00	2.00	3.45
04	6.00	3.00	4.45
05	7.00	4.00	5.45
06	8.00	5.00	6.45
07	9.00	6.00	7.45
08	10.00	7.00	8.45
09	11.00	8.00	9.45
10	12.00	9.00	10.45
11	13.00	10.00	11.45
12	14.00	11.00	12.45
13	15.00	12.00	13.45
14	16.00	13.00	14.45
15	17.00	14.00	15.45

X1004WVS-10AHF-4TSW	PA4T	Phosphor Bronze	X1004H-A
PART N0	Material	Material(Pin)	Suitable XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

DSND		SCALE: N/A	MODEL TYPE: 1.0mm Crimp Style Connector
DWN		VIEW:	PART NO.: X1004WVS-10AHF-4TSW
CHKD		UNIT: mm/in	DWG NO.: X-X1004WVS-10AHF-4TSW
APPD		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0