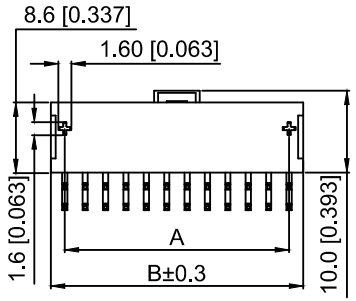







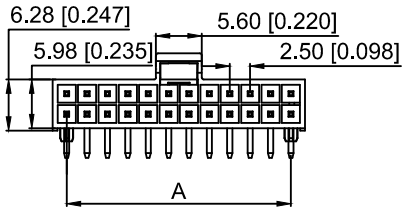


























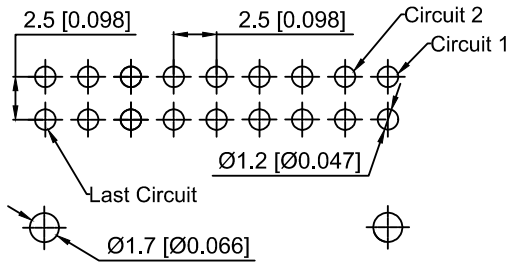
Specifications:
规格：
Voltage rating:250V AC/DC
额定电压：250V AC/DC
Current rating:5A AC/DC
额定电流：5A AC/DC
Withstanding voltage:1500V AC/minute
耐受电压：1500V AC/分钟
Temperature range:-25℃-+105℃
温度范围：-25℃-+105℃
Insulation resistance:1000MΩ min
绝缘电阻：1000MΩ Min
Contact resistance:20mΩ Max
接触电阻：20mΩ Max

X2513 W R - 2x08 A - LP SN
① ② ③ ④ ⑤ ⑥ ⑦

1.Series No
2.Category:W-Wafer
3.Welding Board Range:R-Stright 90°
4.Row No.Pin No:2xXX-2x02~2x08 Pin
5.Special No: A:A Key ; B:B Key
6.Material:LP-LCP UL94V-0
7.Plating:SN-Tin plated

	2x02	2x03	2x04	2x05
A Key Color:Black				 A Key
B Key Color:Natural				 B Key

	2x06	2x07	2x08
A Key Color:Black			
B Key Color:Natural			



Recommended P.C.B hloe dimension
Recommended P.C.B thickness 1.6~2.4mm

Circuit	DIM. A	DIM. B
N(N=4~16)	1.25 x N - 2.5	1.25 x N + 0.94

X2513WR-2x08A-LPSN	LCP	Copper Alloy	X2513H
X2513WR-2x08B-LPSN			
PART N0	Material	Material(Pin)	Suitable XKB Housing

MARK	DESCRIPTION	DATE	REVISED	APPROVED
ΔX				
ΔX				
ΔX				

REVISIONS

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector
DWN		VIEW:	PART NO.: X2513WR-2x08A-LPSN
CHKD		UNIT: mm/in	DWG NO.: X-X2513WR-2x08A-LPSN
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0