



RoHS COMPLIANT

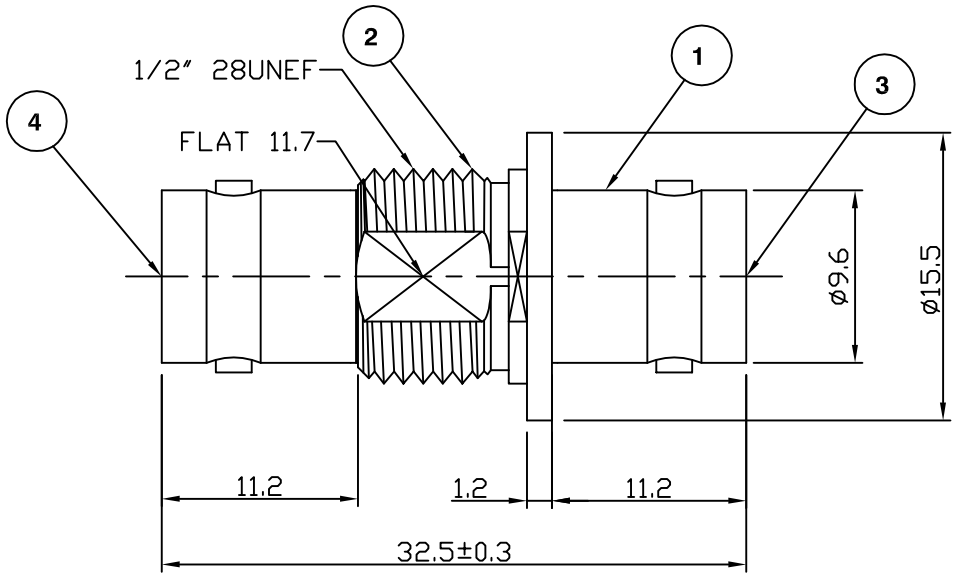

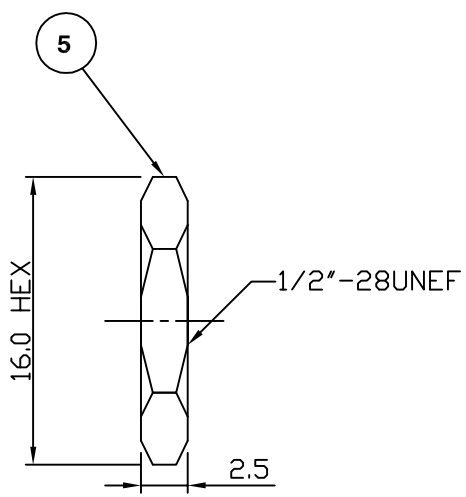

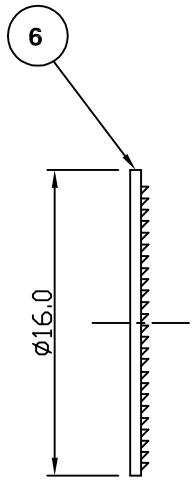

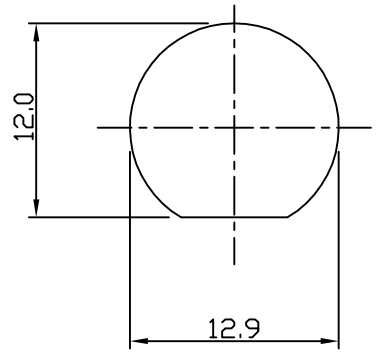

Panel Cutout

Electrical Characteristics

Nominal Impedance:	75 ohms
Frequency Range:	DC to 1 GHz
Operating Voltage (rms):	500 V maximum at sea level
Dielectric Withstand Voltage (rms):	1500 V maximum at sea level
Contact Resistance:	1.5 milliohms maximum
Insulation Resistance:	5000 megohms minimum

Mechanical Characteristics

Mating Cycles:	500 cycles minimum
Interface Dimensions:	Conform to MIL-C-39012

Environmental Characteristics

Temperature Range:	-55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Insulation	ABS
3	Dielectric	Delrin
4	Contact	PB, gold plated
5	Nut	Brass, nickel plated
6	Washer	Steel, nickel plated

DESCRIPTION OF REVISION	APPVD	ISS	DATE
Added panel cutout details	JW	3	04 Apr 06
CAD Issue	SN	2	12 Jul 01
First Issue	DW	1	23 May 96

cinch CONNECTIVITY SOLUTIONS a bel group

Cinch Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford,Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale	
DIMENSIONS: mm	
TOLERANCES: ± 0.2mm unless otherwise stated	
DRAWN BY:	J Williams
CHECKED BY:	M Terry
APPROVED BY:	A Tusi
DATE:	04 Apr 06

TITLE:

Isolated BNC Bulkhead Jack to BNC Jack

PART NUMBER:

VBI100-1-75

COPYRIGHT © 2006 VITELEC ELECTRONICS LIMITED

THIS DRAWING MAY NOT BE REPRODUCED IN WHOLE OR IN PART WITHOUT OUR WRITTEN PERMISSION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

108-0913-001 135-3402-001 145-0701-821 CN0967C10A20P6-040 CN1021A14G03P8-040 M49142/03-0005 30-9516 8-141 CJ70-7 147-0701-832 40-9715HM DD2466134 M24308/4-5F 12-141 415-0030-MM150 415-0043-MM250 147-0701-241 415-0536-012 C0909A18-11PN-106 DEUH-9P 145-0693-002 21-14-M5.0 40-98443N-C 415-0028-048 131-3701-306 142-0403-011 30-9506-88 ATT-0263-04-SMA-02 111-0102-001 415-0203-024