
DATA SHEET

COAXIAL ADAPTER, SMA - MMBX, 50 Ohm, plug / jack (male / female)

33_SMA-MMBX-50-1/119_N

Properties

- Wide range of different configurations
- Most common interfaces available
- Accurate transitions
- Effective and reliable interconnection solutions
- Appropriate materials

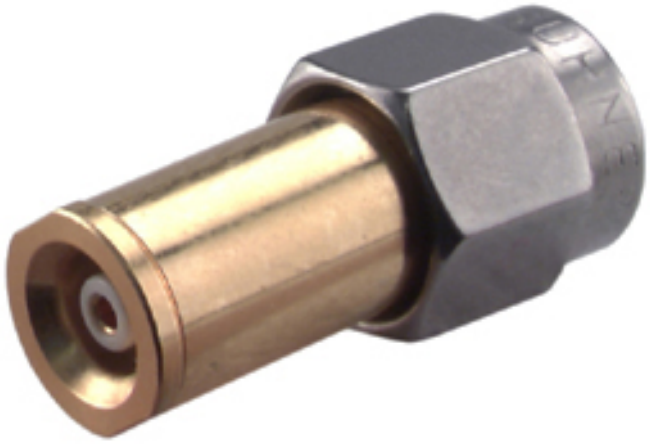

Product configuration		
Interface type	Gender	Standard
SMA	plug (male)	IEC 60169-15_MIL-STD-348A/310_CECC 22110
MMBX	jack (female)	HUBER+SUHNER-MMBX

Interface and material data		
SMA		
Piece parts	**Material**	**Plating**
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Copper Beryllium Alloy	SUCOPRO Plating
Body	Copper Beryllium Alloy	SUCOPRO Plating
Insulator	PFA / PTFE	
Coupling nut	Stainless Steel	Passivated (Plating)
MMBX		
Piece parts	**Material**	**Plating**
Centre contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Outer conductor	Brass	SUCOPRO Plating
Body	Brass	SUCOPRO Plating
Insulator	LCP (Liquid crystal polymer)	

Electrical data	
Impedance	50 Ω
Interface frequency	6 GHz

Electrical Data (frequency related)		
Frequency range	**Return loss**	**VSWR**
0 GHz ... 2.5 GHz	32 dB	1.05
2.5 GHz ... 6 GHz	30 dB	1.06

COAXIAL ADAPTER, SMA - MMBX, 50 Ohm, plug / jack (male / female)

33_SMA-MMBX-50-1/119_N

Electrical Data (frequency related)		
Frequency range	**Return loss**	**VSWR**
6 GHz ... 12.4 GHz	16 dB	1.35

Mechanical data	
Weight	0.0039 kg
Mating cycles	500

Environmental data	
Operation temperature	-55 °C ... 155 °C

Ordering Information Table		
Item number	Item description	Packaging type
23004935	33_SMA-MMBX-50-1/119_NE	Single

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2157 / Date of publication: 27.05.2024 / uncontrolled copy

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Huber+Suhner:

23000457 RADOX 125 0.75 MMÂ² RED 11_SMC-50-2-10/111_NE 12535682 6620_SMA-50-2/199_NE
84118385 G032D/BNCm/BNCm/1000 11MMBXEF31616MMBX/300 23002145 G032D/Nm/SMAm/1000
MINIBEND R-10 24_SMA-50-2-15/111_NH 33_PC24-SK-50-2/199_NE G_03130_HT-01 1399.31.0020
MINIBEND R-12 PCRS_LCMX_LCMX_O421T_30.0_LL 1399.17.0210 6601_PC185-50-1/199_NE 85201112
MINIBEND R-8 16_MMCX-50-2-4/111_OH Minibend L-10 1399.17.0231 6806.19.A 84093961 RG_196_A/U
11_TNC-50-3-116/133_NE 12012090 22511964