


Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

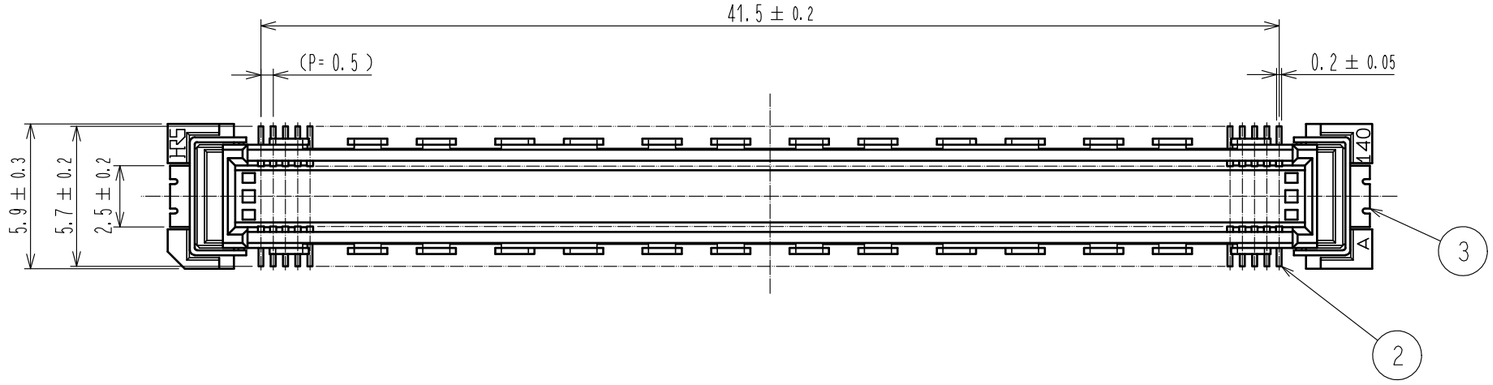

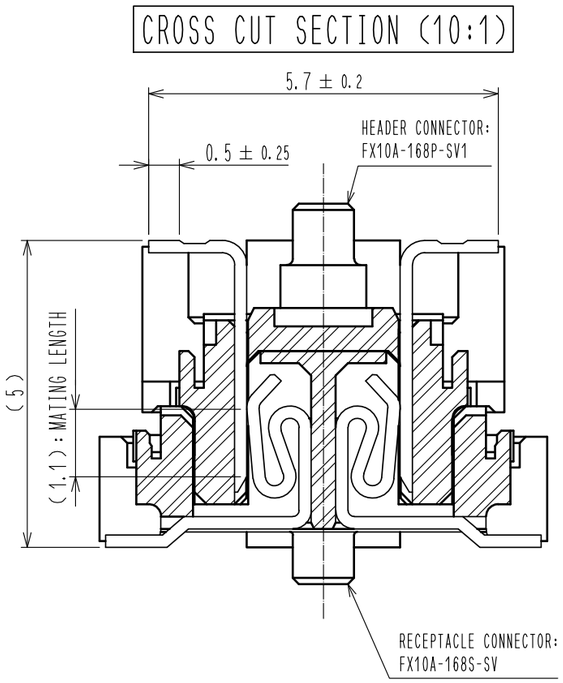

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS : 0.15mm)

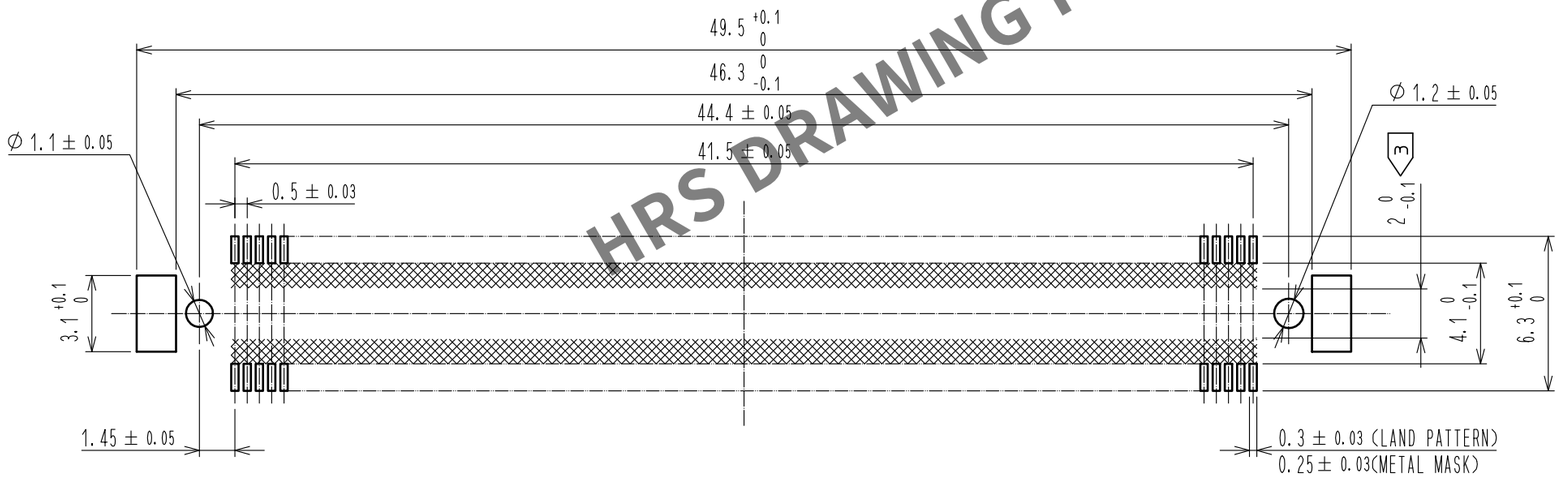

HRS DRAWING FOR REFERENCE

NOTES
1. SMT LEAD-COPLANARITY : 0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
4. EMBOSS CARRIER TAPE PACKAGE IS APPLIED ON THIS PRODUCT. PLEASE REFER TO THE SHEET 2/2 FOR THE DETAILS.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
3	PHOSPHOR BRONZE	TIN-PLATING			
2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.1μm min. LEAD AREA : TIN-PLATING 1μm min. UNDER PLATING : NICKEL 1μm min.	5	POLYESTER	TOP COVER TAPE
1	LCP	BEIGE	4	POLYSTYRENE	EMBOSSED CARRIER TAPE


UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	4 : 1	A	1	DIS-F-00015371	SY. KUDO	HT. YAMAGUCHI	20220913

HIROSE ELECTRIC CO., LTD.


APPROVED	HT. YAMAGUCHI	20100729	DRAWING NO. EDC-151971-91-21
CHECKED	HT. YAMAGUCHI	20100729	PART NO. FX10A-168P-SV1(91)
DESIGNED	SY. KAMIGA	20100729	
DRAWN	HK. SUNADORI	20100728	CODE NO. CL0570-0144-2-91 A 1/2

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

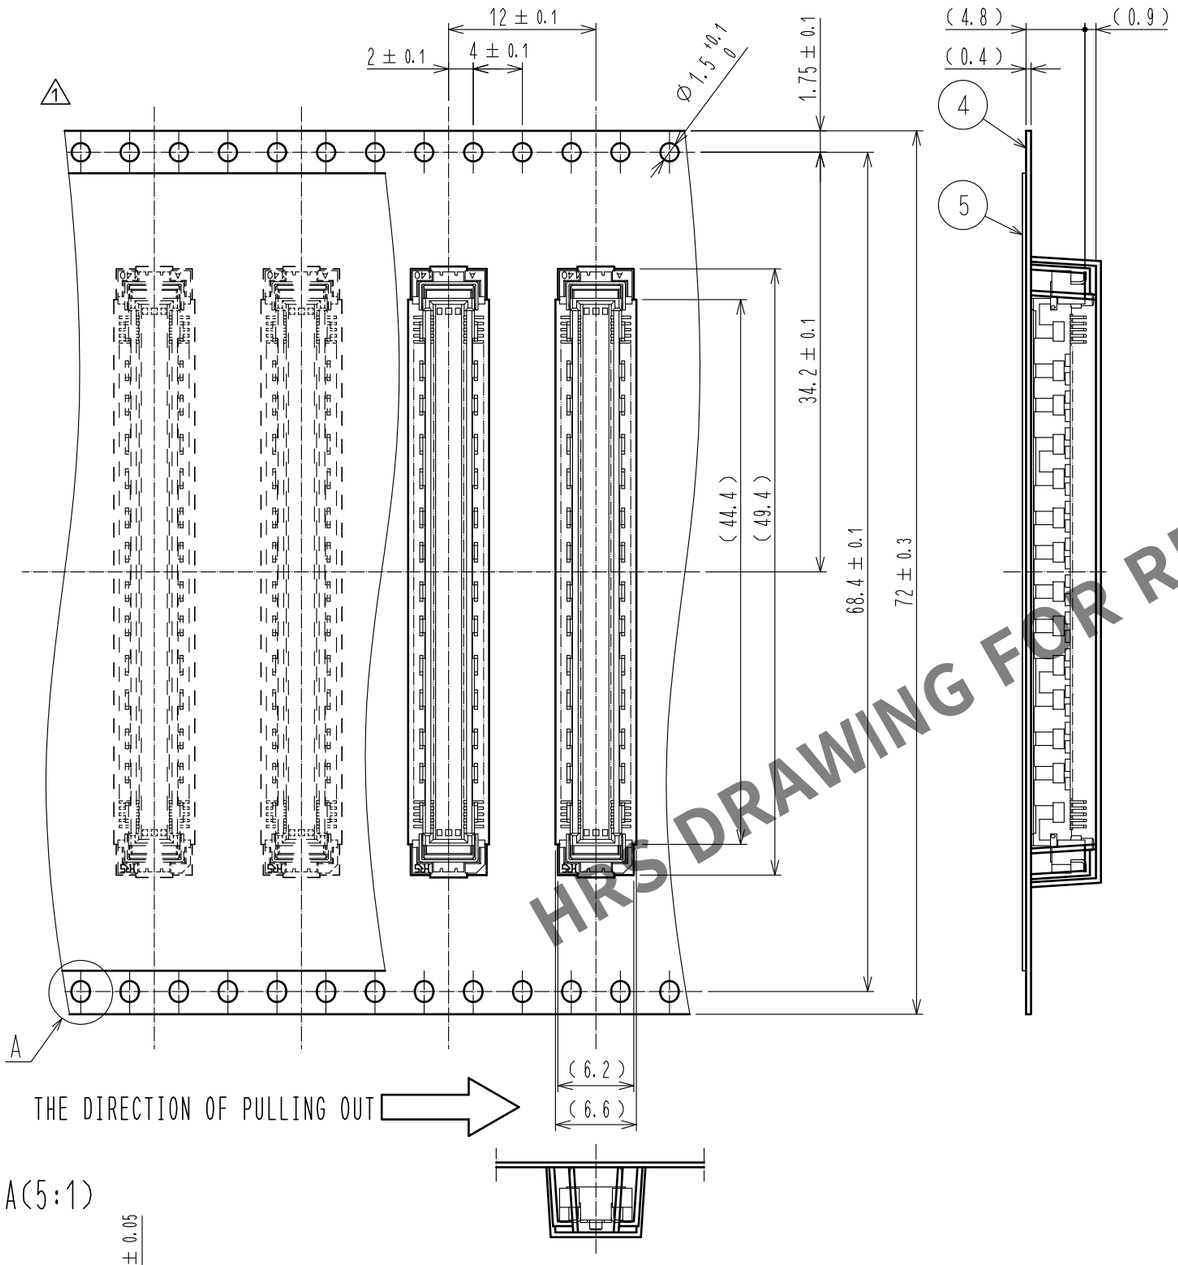

REELED DIMENSION (Free)

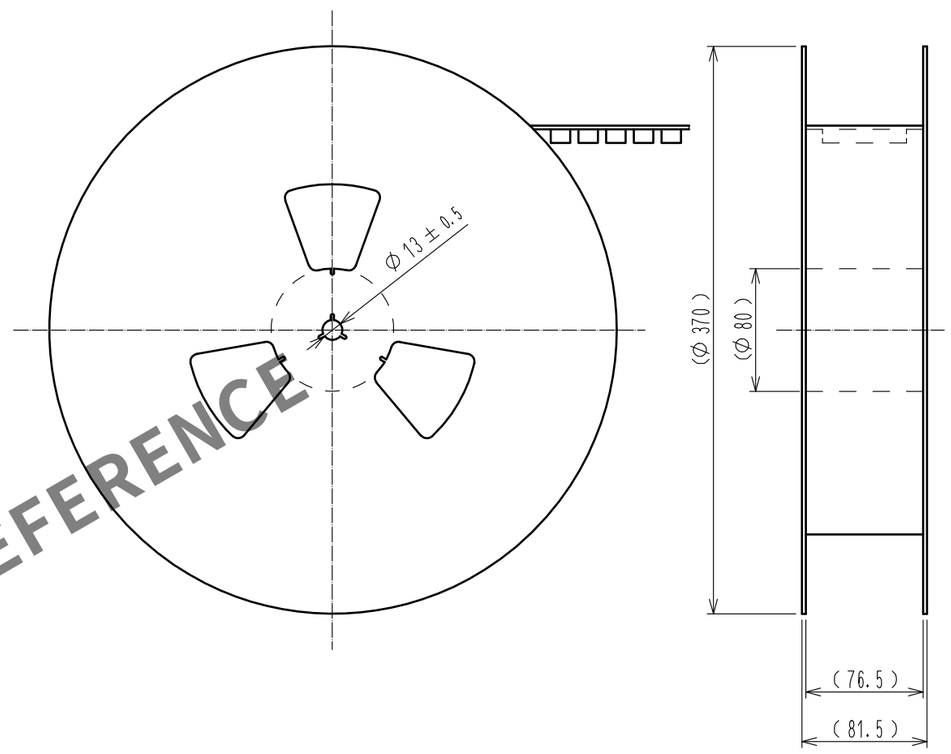

HRS DRAWING FOR REFERENCE

NOTES
6 1REEL : 1000 CONNECTORS.
7 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
8 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
9 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

DRAWING NO.	EDC-151971-91-21
PART NO.	FX10A-168P-SV1(91)
CODE NO.	CL0570-0144-2-91

1 2/2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF62C-4S-2.2C GT8E-6S-HU ZE05-24DP-2H ZE05H-12DP-2H DF33C-4S-3.3C DF36A-25P-SHL DF57AH-5S-1.2C FH41-30S-0.5SH(05) DF22A-1416SCFA DF65-4P-1.7V(21) FH35C-19S-0.3SHW(50) FH72-21S-0.3SHW RM15TP-2PA(81) ZE064W-8DP-HU/R(A) DF11-16DP-2DSA(24) DF52-4P-0.8C DF59M-2224PCF FH41-50S-0.5SH(28) BM29B0.6-4DS/2-0.35V(51) FX8-120S-SV(22) ZE05H-4P-2V(A) DF17(3.0)-40DS-0.5V(57) DF19A-3032SCFA(41) HDE-CTH(10) RM12BRD-2PH(81) ZH05-20DP-HU(B) DF40C-50DP-0.4V(51) FX18-60S-0.8SH FX18-80S-0.8SH RM15TRH-10PH(81)