
2115 Series

Pin Header 2.0mmX2.0mm(0.079"X0.079")

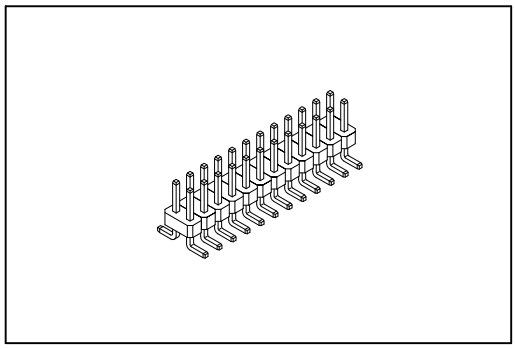

Material:

Housing: High Temperature Plastic UL94V-0.
Contacts: Copper Alloy.


Electrical Characteristics:


Current Rating: 1 A.
Dielectric Withstanding Voltage: AC 500V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -40°C~+105°C.

Features:

* Surface Mount
* Low profile insulator 1.50mm(0.059″).
* Side-to-side and end-to-end stackable.
* Custom design provides wide product flexibility.
* Additional plating options available.

Mates with: 1101,2106,2141,2142,2143,2145,2148.

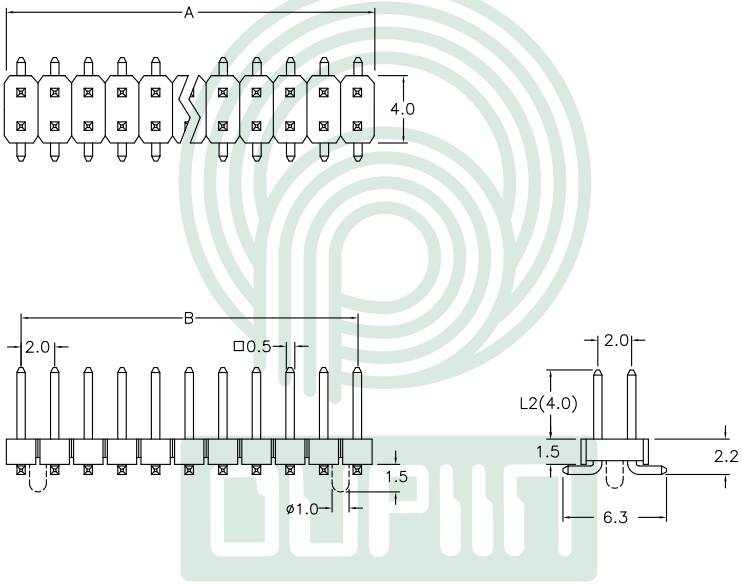

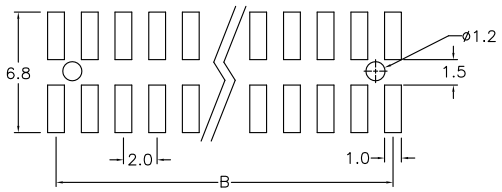

P.C. Board Layout

Position / Dimension	4 Thru 80
A	2.0 X No. of Positions /2−0.25
B	2.0 X No. of Positions /2−2.0

Ordering information

2115-	2	X	40	G	00	D	N-L2	U
Series	Double Row		No. of Pin Per Row	G: Gold Plated	00: G/F	D: SMD Type	P: With Post N: Without Post	U: Tube Package

Custom Design: S.M.D. (i.e. 2115-2 X 40 G00DN-L2)
L2: Mating Length

Information including designs, specifications and components may be changed or updated without notice.