
Rocker Switch | **SRD1-2A-DC-1-BRN**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

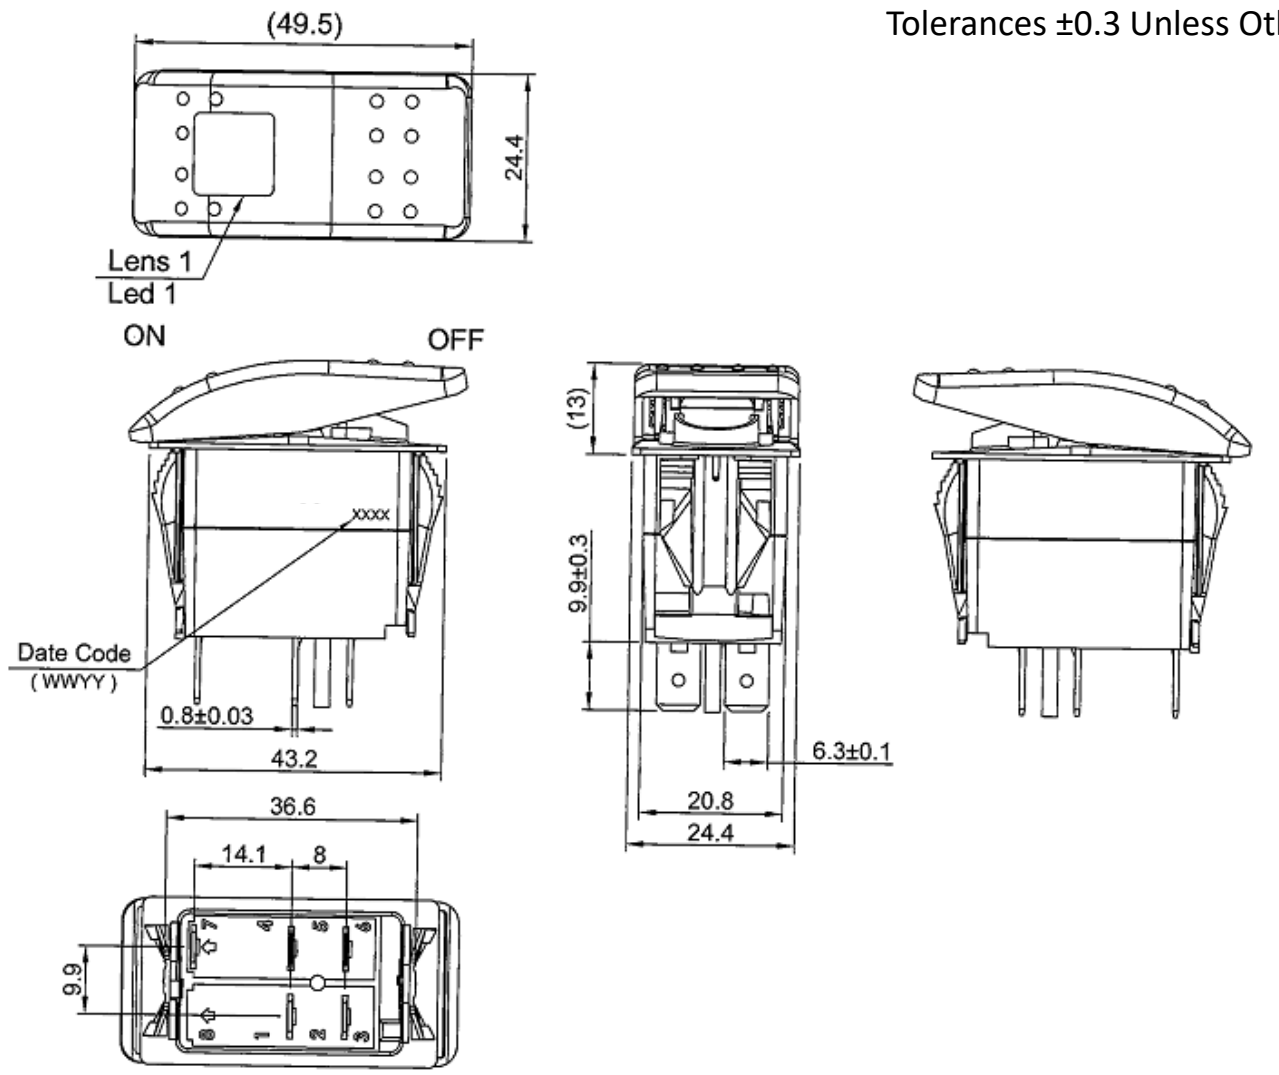


Mounting Hole

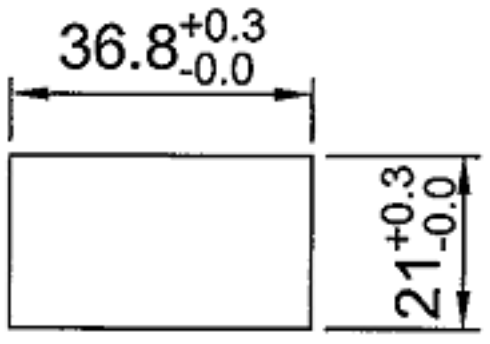

Thickness: 1.0-5.0mm

Circuit Diagram

5P DPST OFF-ON (LED-D)

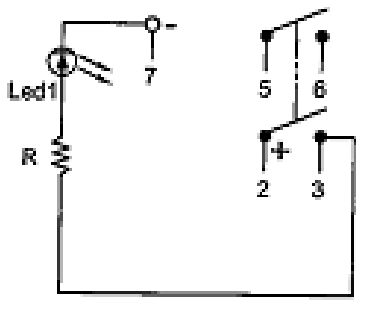

Electrical Specifications

Rating	21A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame/ Actuator	Black, Nylon 66 (94V-2)
Lens	White diffused, PC
LED	Red, dependent
Terminals	Silver plated copper/ Brass
Waterproof	IP56

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

PB-1A-DC-2-RDL PD-1E-DC-9-UL TE3-1A-DC-1-AL RA4-2A-DC-2-AL TA1-1A-DC-4 TA2-1A-DC-5 RC-1A-DC-1-AL SRC1-1B-DC-1-B SRD1-2A-DC-1-BGN SRD2-2F-DC-1-RNN SC-B SRD2-1G-DC-1-BNN SRD2-2F-DC-1-BNN TB1-2H-DC-6 RF3-1A-DC-2-GL RG3-1A-DC-1-B SRB1-1G-DC-1-NN PB-1A-DC-2-B RD2-1A-DC-1-AL TC6-P1-Z TE1-1F-DC-1-PB TE6-1A-DC-1-UL WR1 PB-1B-DC-2-RIL RF1-1A-DC-2-B-3 SB-1B-DC-3-B SB-1B-DC-3-R SRA1-1A-DC-1-NN-2 SRA1-2F-DC-1-NN TA2-1G-DC-6-O