
ROHS Compliant


MAPX	MODIFICATION	DATE	DRAW	APPROVE

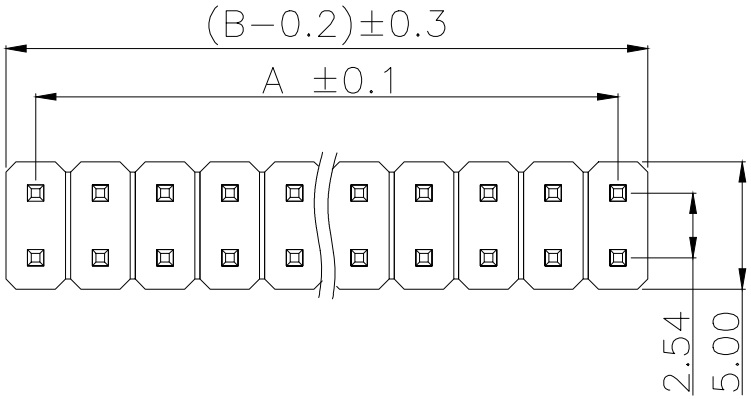


SPECIFICATIONS

Current Rating: 3Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20MΩ Max
Withstanding Voltage: AC 1000V
Operation Temperature: −40° to+105°
Contact Material: Copper Alloy
Standard: PBT
Insrlator Material: Polyester(UL 94V−0)
Contact Plating: Gold Flash
Max.Processing Temp: 200°C for30−60seconds
(220°C for5seconds)

P/N	PIN	DIM.A	DIM.B
PH2.54−01−01PZS	2*1	0.00	2.54
PH2.54−01−02PZS	2*2	2.54	5.08
PH2.54−01−03PZS	2*3	5.08	7.62
PH2.54−01−04PZS	2*4	7.62	10.16
PH2.54−01−05PZS	2*5	10.16	12.70
PH2.54−01−06PZS	2*6	12.70	15.24
PH2.54−01−07PZS	2*7	15.24	17.78
PH2.54−01−08PZS	2*8	17.78	20.32
PH2.54−01−09PZS	2*9	20.32	22.86
.....	.....	.....	.....
PH2.54−01−40PZS	2*40	(PIN−1)X2.54	(PIN)X2.54

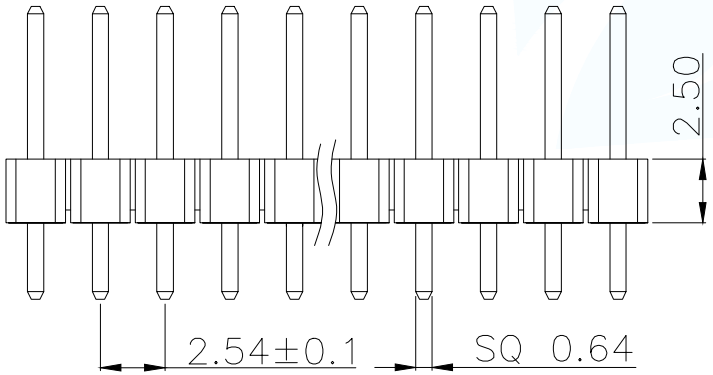


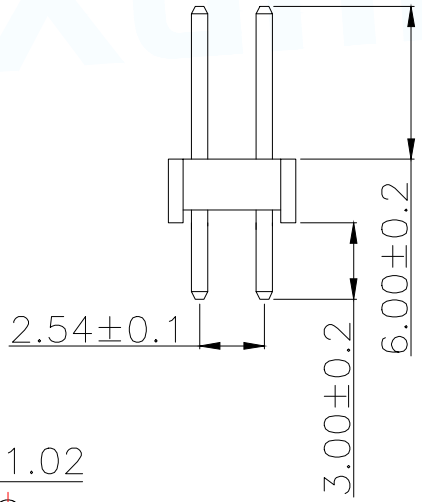

PART NUMBER DESCRIPTION:

PH2.54−01−NPZS

(D＝单排;S＝双排)
(Z＝直脚;W＝弯脚)
(PIN数量;01.....40PIN)
(排针开关)

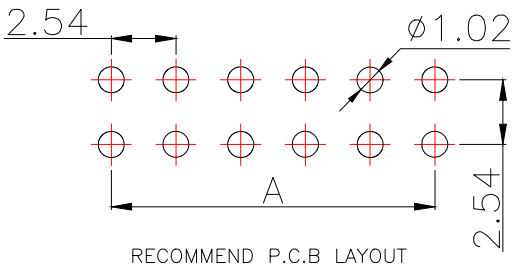

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd	
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE:2.54PH H2.5 2xNPin 180度 PC3.0 PA6.0 PB2.5 L11.5 PBT
			PAR: PH2.54−01−NPZS
DECIMALS:	ANGLES:		DWN:
X.±0.30	X°±5°		CHKD:
X.X±0.20	X.X°±1°		APVD:
X.XX±0.10	X.XX°±0.5°	CUSTOMER COPY	SCALE N:A / UNIT:MM / SIZE:A4 / SHEET:1F1 / REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

WAFER-WBM4.2-16PJK-GB WAFER-VH3.96-4PLB FPC-0.5FX-14PWCR-H20 FPC-0.5FX-20PWBH15 PHB2.0-02-20PZZ WAFER-GH1.25-6PLB WAFER-XH2.54-4PWZ-H62 FPC-0.5FX-16PWCR-H20 TYPEC-304YDSW-ACP16 WAFER-MX1.25B-8PWB FPC-0.5FX-4PWCR-H20 WAFER-PH2.0-3PWB DC-031A-A100 FPC-0.5AS-5PWCR-H20 FPC-0.5AX-24PWCR-H20 MU-103-ARW64 FPC-0.5HF-10PWBR-H20 FPC-1.0HF-4PWAR-H20 HDMI-212L FPC-1.0AX-14PWCR-H25 FPC-1.0AX-4PWCR-H25 WAFER-PH2.0-11PZZ FPC-0.5FX-4PWBH15 WAFER-PH2.0-8PLB WAFER-PH2.0-6PWB FPC-0.5AL-6PB FPC-0.5AX-30PWCR-H20 RJ45-005-014-11 SMA-KWE-323C-H13X23-LW WAFER-PH2.0-2PJK