

Kinghelm®

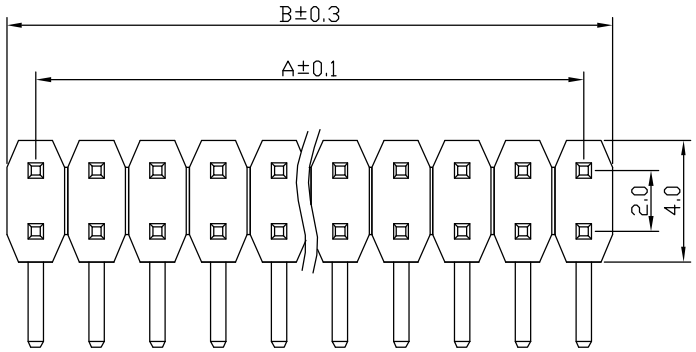


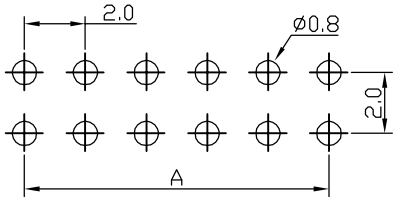


RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

SPECIFICATIONS

Current Rating: 1.5 Amps
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Withstanding Voltage: AC 500V
Operation Temperature: -40° to+105°
Contact Material: Brass
Standard: PBT
Insrlator Material: Polyester(UL 94V-0)
Contact Plating: Gold Flash
Max.Processing Temp: 200° C for30-60seconds
(220° C for5seconds)

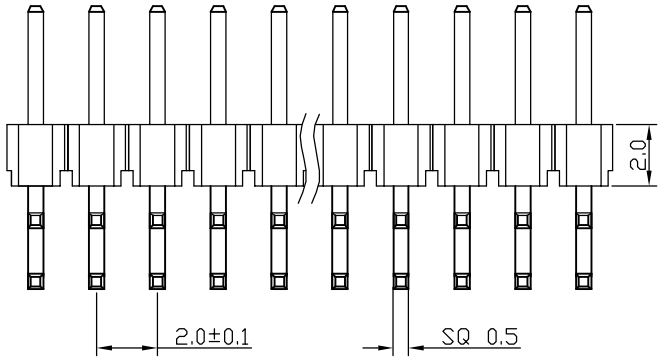

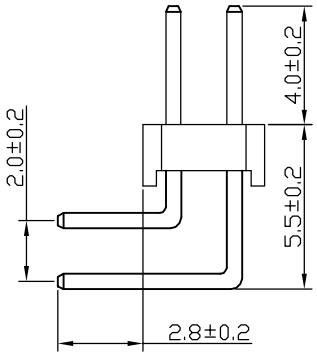

(1) Pin Spacing: 200=2.0mm
(2) Product Name: PH=Pin Header
(3) No.of Rows:1=Single Row; 2=Dual Row
(4) No.of Pins Per Row:1～40
(5) Insulator Material Height: 15=1.5mm; 20=2.0mm
(6) Connector Type:S=Straight; R=Right; Angle M=SMT
(7) Contact Material Length: 87=8.7mm 105=10.5mm
(8) No.of Insulator Material: 1=1PCS; 2=2PCS; 3=3PCS
(9) Contact Plating:
SN=Tin;GO=Gold Flash;SO=Gold Flash/Tin;AU08=Au 0.8u"
(10) Insulator Material Option:
A=BK-PBT;B=BK-PA6T;C=BK-PA46;D=KB-LCP;S=Special

深圳市金航标电子有限公司	WWW.BDS666.COM
KH-2PH90-2X10P-L10.5	0755-83044319

UNLESS OTHEWIXE SPECIFIED TOLERANCE
X :±0.3 X° :±5°
X.X :±0.2 X.X° :±1°
X.XX:±0.1 X.XX° :±0.5°

DRAWM NAME: 2.0PH 2xnPin H2.0 90° L10.5/14.5

SIZE	A4	SCALE	N:1	PROUCT NO.	
REV	A	UNIT	mm	PROJECT	PAGE 1/1
CHECKED:	LI BEI LIN 12/03/07	CHECKED:	/ /	APPROVED:	/ /

No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B	No. of	DIM.A	DIM.B
1	0.00	2.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
2	2.00	4.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
3	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
4	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
5	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
6	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
7	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
8	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
9	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Kinghelm:

KH-2PH180-1X14P-L8.7 KH-FFC-V0.5-32P-150MM KH-HDMI-0035-PK KH-MCX-K507-W
KHA(RG1.13)-TX50-IPEX KH-081-TX100-IPEX4 KH-1.27PH90-1X16P-L10.5 KH-2.54TXM-CB-H13.5
KH-300922-TP KH-4.5X4.5X10H-B3J KH-6X6X6H-SMT-FS KH-6X6X9H-STM KH-FFC-V0.5-8P-150MM
KH-IPEX-K501-29 KH-2.54PH180-1X8P-L11.5 KH-4.5X4.5X6.5H-SMT KH-4.5X4.5X6H-TJ
KH-2.54TXM-CB-H13.5-G KH-PH-2P-Z KH-1.27PH90-1X20P-L10.5 KH-SMA-K513-11G KH-PCIE5.2H-52P
KH-1.27PH90-2X10P-L10.5 KH-2.54PH90-1X15P-L13.8 KH-DR9S-F8.1-1 KH-2.54FH-1X15P-H8.5
KH-6X6X6H-TJ KH-6X6X10H-STM KH-BM2.54-2P-W KH-HDMI-0024-JBS