

Jul.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

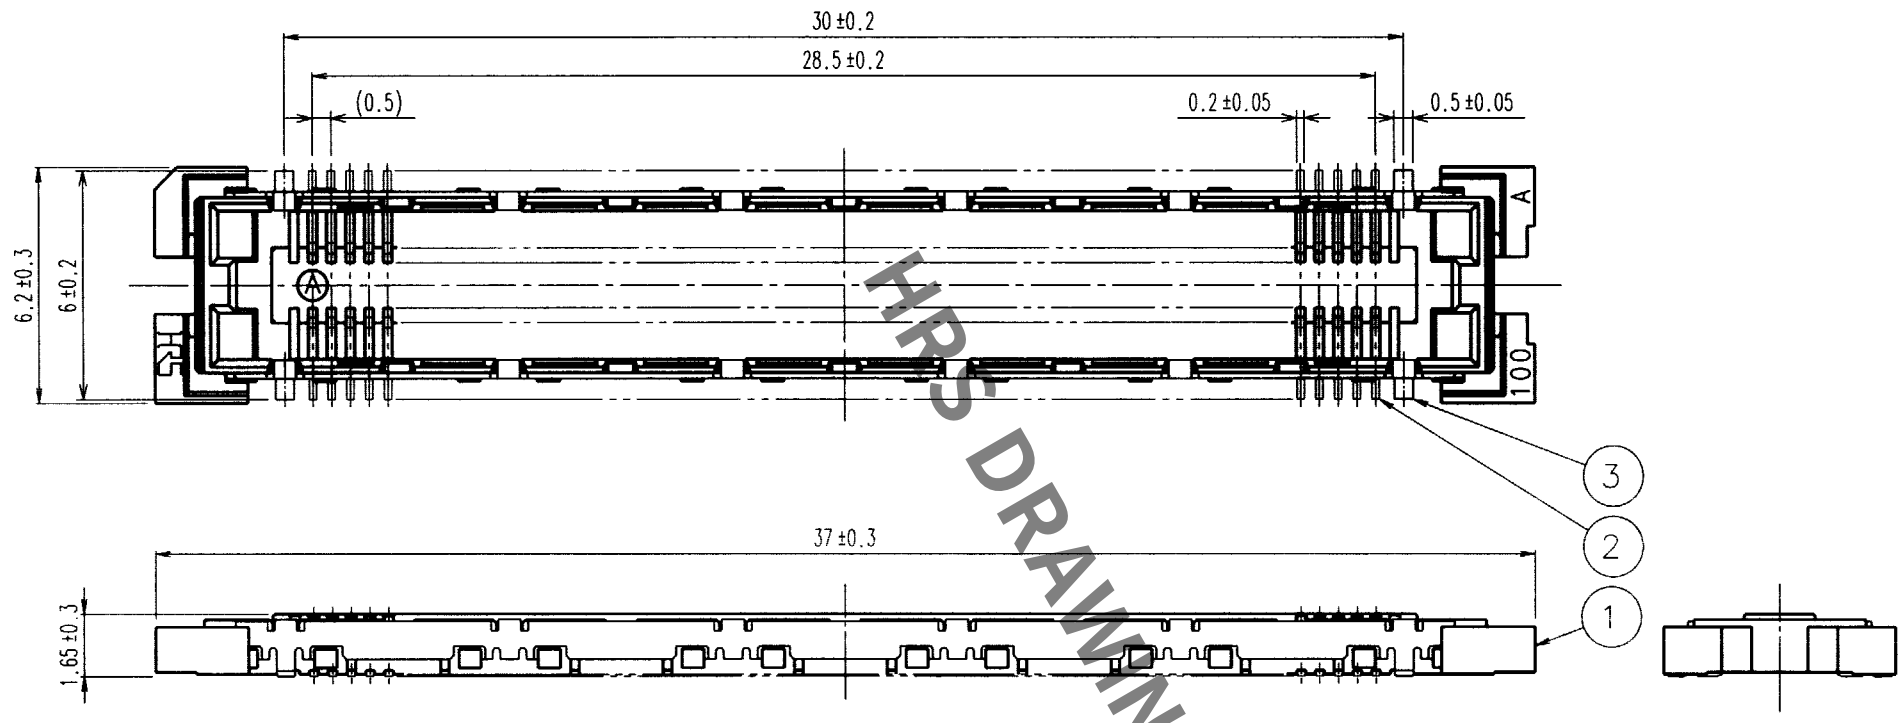

RECOMMENDED LAND PATTERN DIMENSION OF PCB

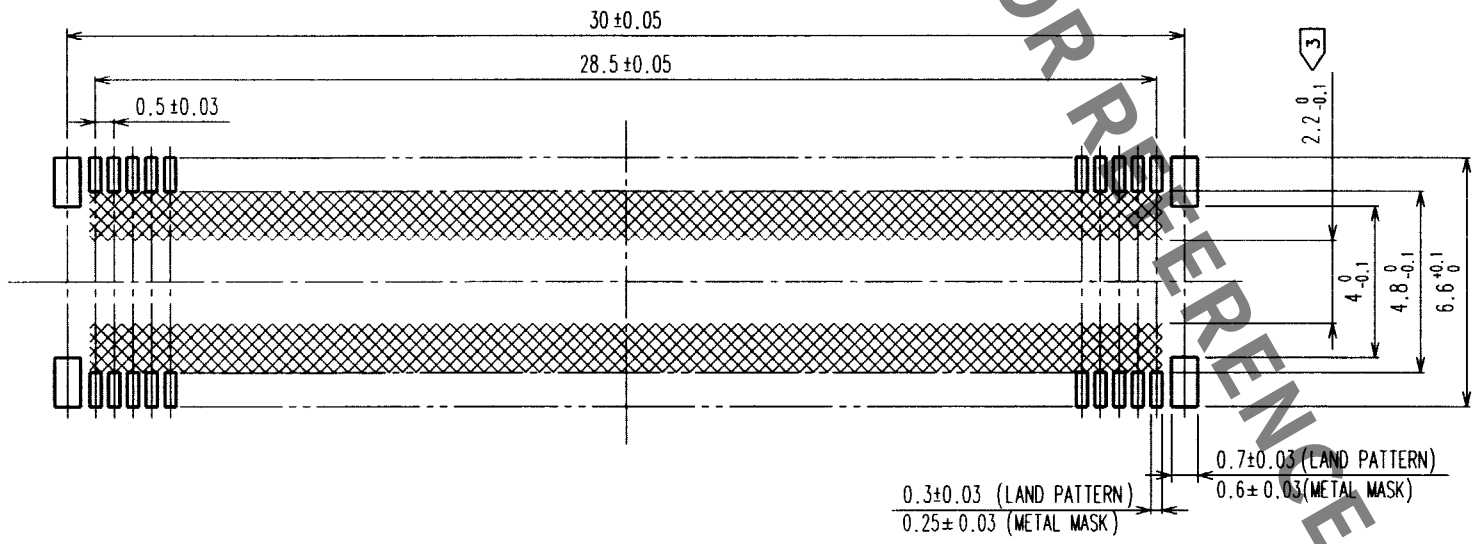

HRS DRAWING FOR REFERENCE

NOTES
1. SMT LEAD-COPLANARITY:0.1 MAX.
2. THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
3. MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND ,OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED ▨ AREA.)

NO.	MATERIAL	FINISH, REMARKS
2	PHOSPHOR BRONZE	CONTACT AREA:GOLD (0.1μm) OVER NICKEL LEAD:GOLD FLASH OVER NICKEL
1	LCP	BEIGE UL94V-0

NO.	MATERIAL	FINISH, REMARKS
3	PHOSPHOR BRONZE	TIN PLATED

CODE NO. (OLD)	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL	S.Kitajima 99.05.25	M.Matsukawa 99.05.25	M.Ishida 99.05.26	T.Yoshimura 99.05.27	

SCALE 5 : 1 UNITS mm	DRAWING NO. EDC3-152122 HRS HIROSE ELECTRIC CO.,LTD.	PART NO. FX11LB-116S-SV CODE NO. CL573-0154-5 1/1

TO
PCK

FORM NO.229

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Hirose Electric:

DF65-4P-1.7V(21) DF17(3.0)-40DS-0.5V(57) DF19A-3032SCFA(41) DF40C-50DP-0.4V(51) GT8E-6S-HU ZE05-24DP-2H DF57AH-5S-1.2C DF62C-4S-2.2C DF36A-25P-SHL DF52-4P-0.8C FX8-120S-SV(22) RM15TP-2PA(81) RM15TRH-10PH(81) ZE064W-8DP-HU/R(A) DF11-16DP-2DSA(24) DF59M-2224PCF FH41-50S-0.5SH(28) FH72-21S-0.3SHW FH35C-19S-0.3SHW(50) BM29B0.6-4DS/2-0.35V(51) DF33C-4S-3.3C FX18-60S-0.8SH ZE05H-12DP-2H FH41-30S-0.5SH(05) HDE-CTH(10) DF22A-1416SCFA FX18-80S-0.8SH RM12BRD-2PH(81) ZE05H-4P-2V(A) ZH05-20DP-HU(B)