



RoHS

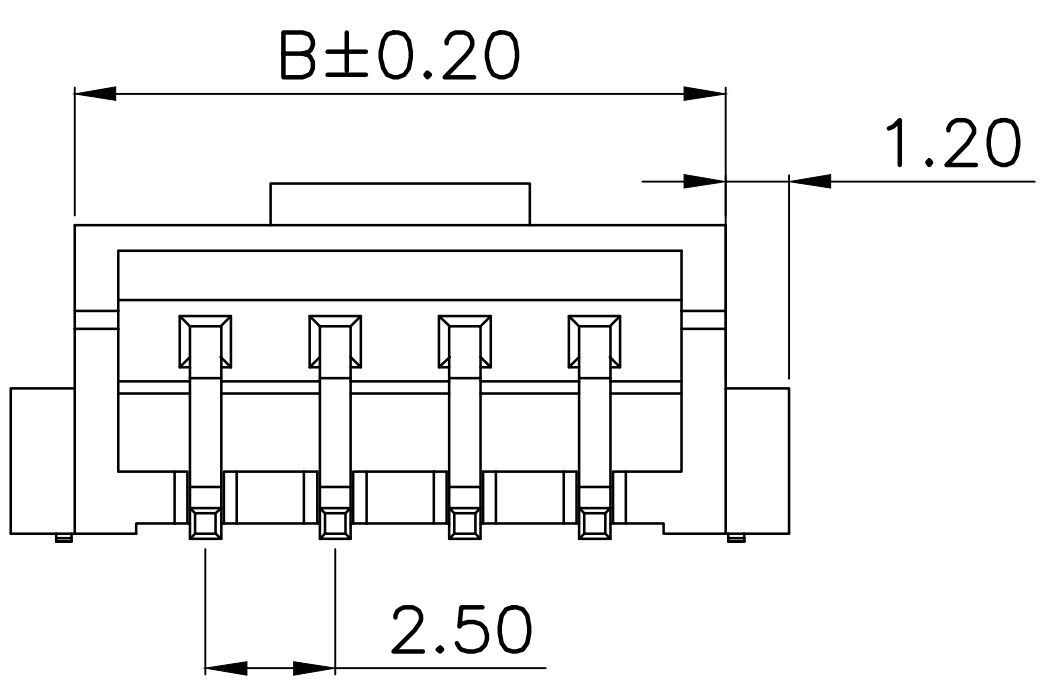


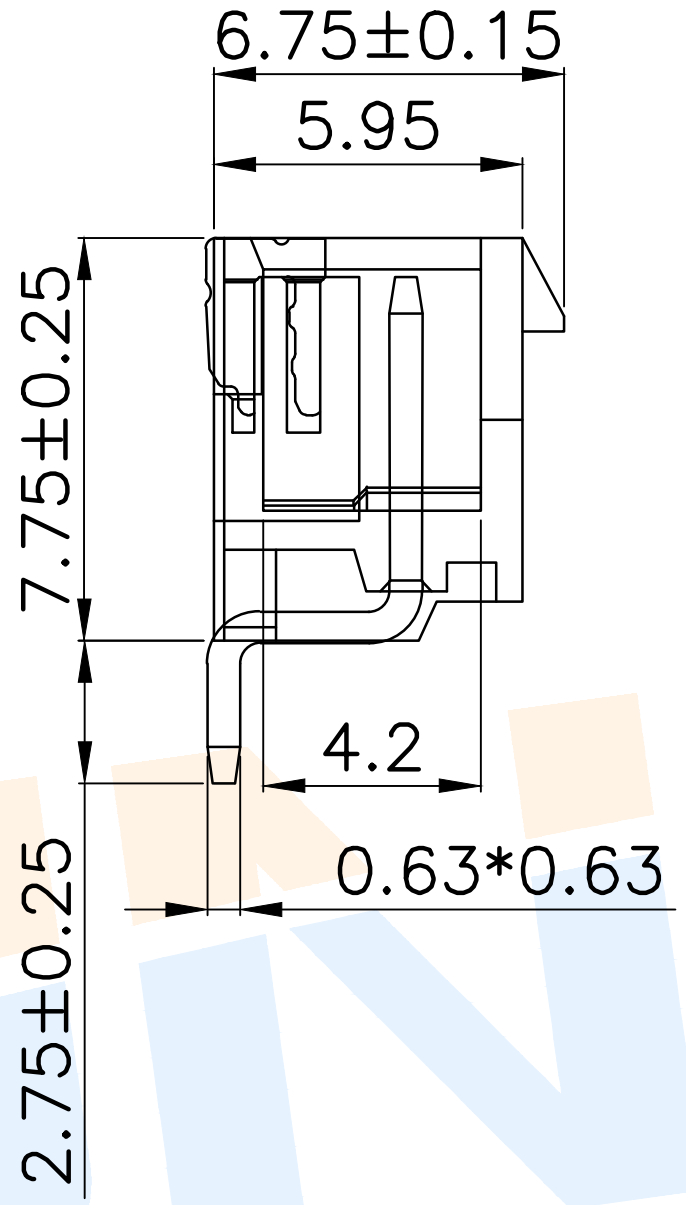

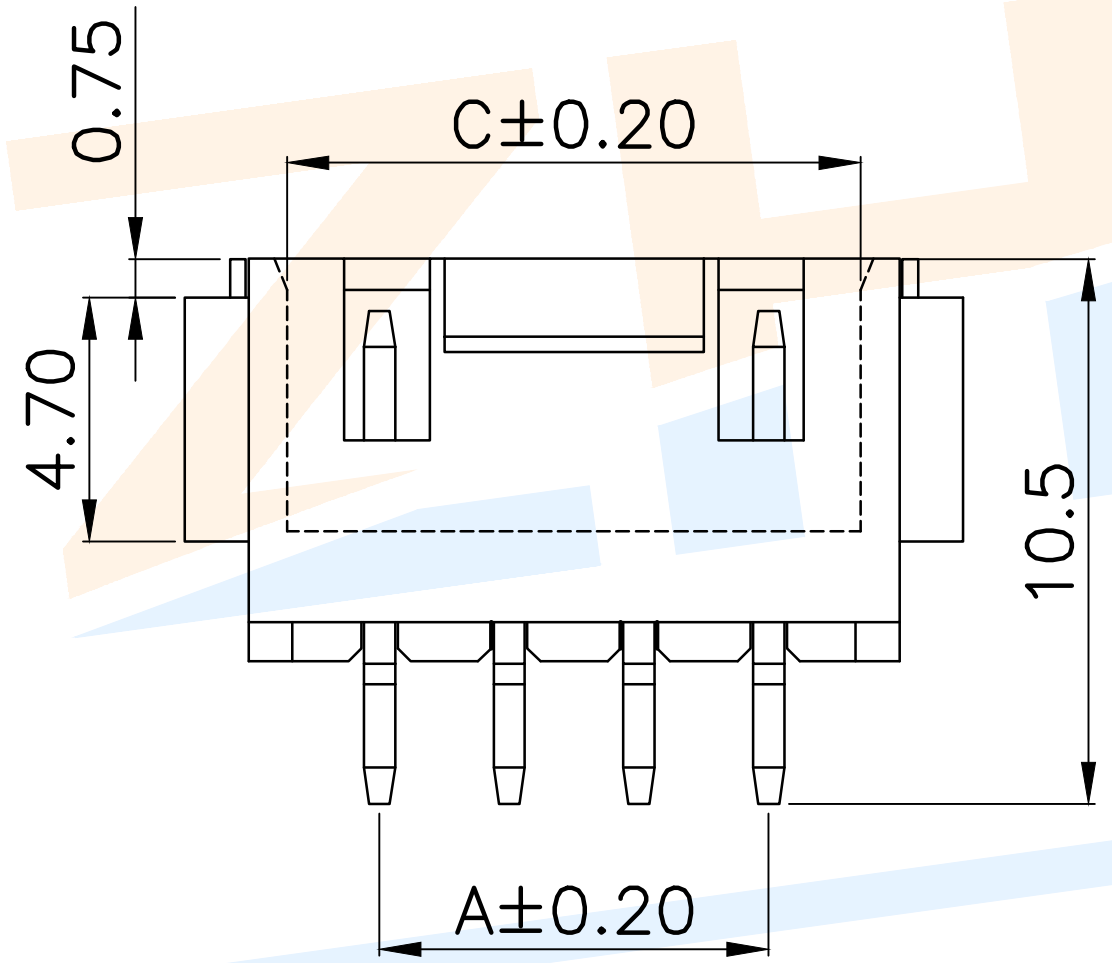

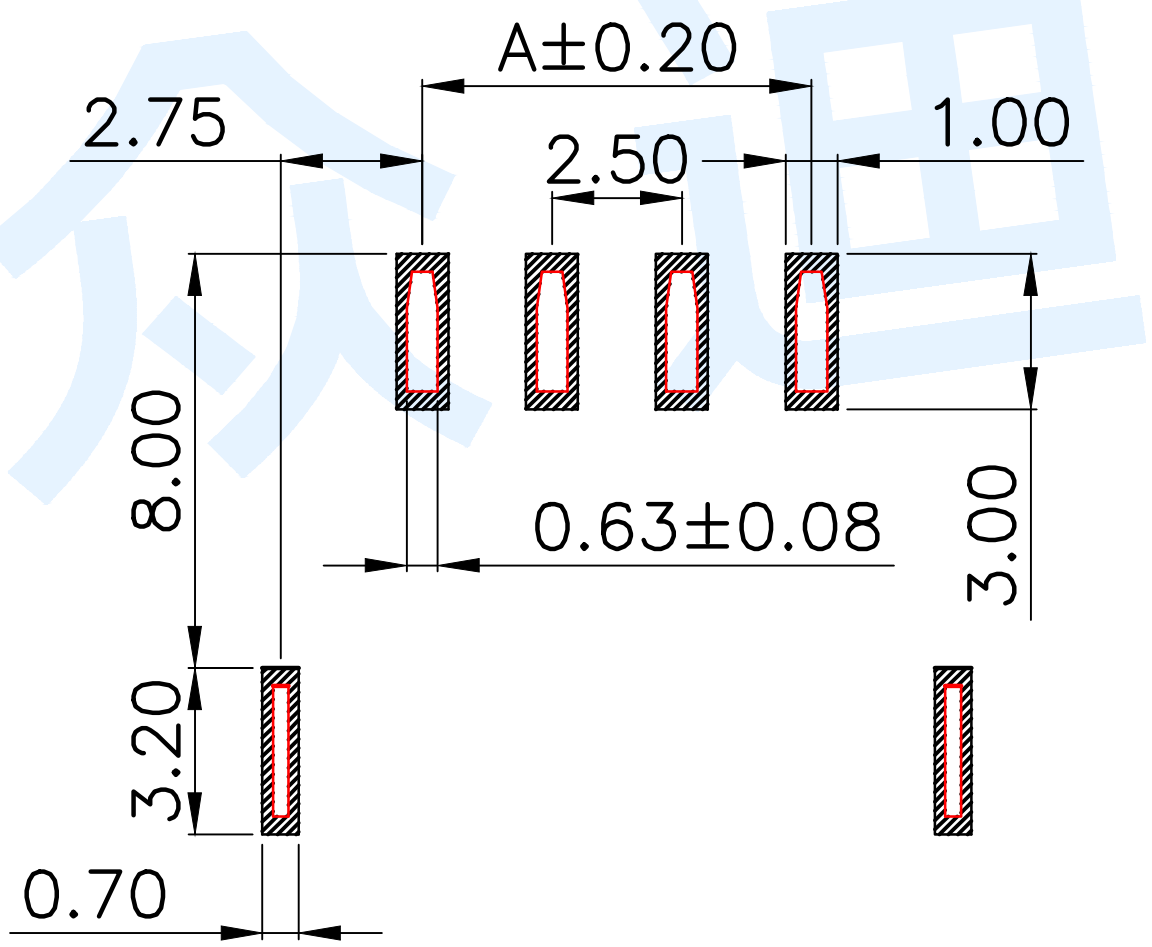

适用线路板(PCB LAYOUT)

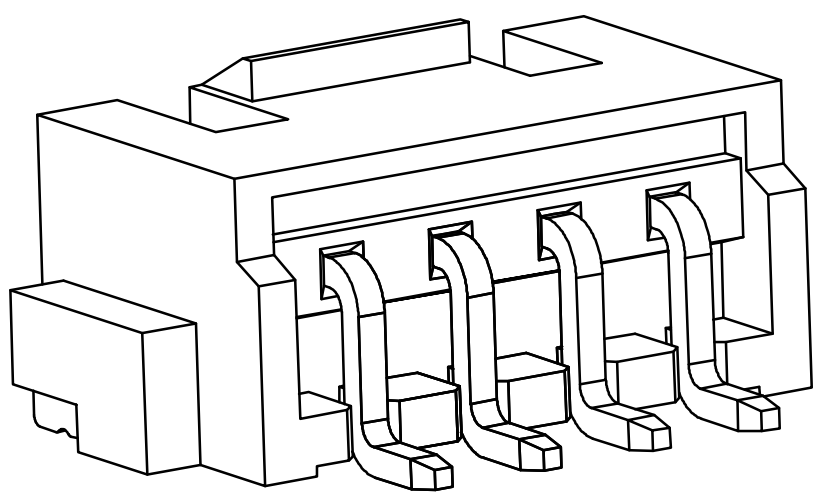

Model No.	Pin	A	B	C
WAFER–XHB2.54–2PWT–W1	2	2.50	7.50	6.05
WAFER–XHB2.54–3PWT–W1	3	5.00	10.00	8.55
WAFER–XHB2.54–4PWT–W1	4	7.50	12.50	11.05
WAFER–XHB2.54–5PWT–W1	5	10.00	15.00	13.55
WAFER–XHB2.54–6PWT–W1	6	12.50	17.50	16.05
WAFER–XHB2.54–7PWT–W1	7	15.00	20.00	18.55
WAFER–XHB2.54–8PWT–W1	8	17.50	22.50	21.05
WAFER–XHB2.54–9PWT–W1	9	20.00	25.00	23.55
WAFER–XHB2.54–10PWT–W1	10	22.50	27.50	26.05
WAFER–XHB2.54–11PWT–W1	11	25.00	30.00	28.55
WAFER–XHB2.54–12PWT–W1	12	27.50	32.50	31.05
WAFER–XHB2.54–13PWT–W1	13	30.00	35.00	33.55
WAFER–XHB2.54–14PWT–W1	14	32.50	37.50	36.05
WAFER–XHB2.54–15PWT–W1	15	35.00	40.00	38.55
WAFER–XHB2.54–16PWT–W1	16	37.50	42.50	41.05
WAFER–XHB2.54–17PWT–W1	17	40.00	45.00	43.55
WAFER–XHB2.54–18PWT–W1	18	42.50	47.50	46.05
WAFER–XHB2.54–19PWT–W1	19	45.00	50.00	48.55
WAFER–XHB2.54–20PWT–W1	20	47.50	52.50	51.05
WAFER–XHB2.54–□□PWT–W1(–P=盘装, 非盘装不启用)				

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 28#～22#
3.Applicable PC board thickness/适用PC板厚度：1.6mm
4.Current rating/额定电流：3.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1000V AC/minute
8.Contact Resistance/ 接触电阻：20mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

NO.	Name	Number	Qty	Materil	Remarks
Ⓒ	Soldering lug		1	Brass	Plating Sn
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	LCP	Off White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

angle	±2°	design	date
10~30	±0.30	Review	date
5~10	±0.20	Approved	date
~ 5	±0.10	Drawing number:	

modify | Review | Approved | Tolerance not specified | Proportion 1:1 | unit mm | gape number | A4

name: WAFER CONNECTOR

model: WAFER–XHB2.54–□□PWT–W1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-GH1.25-14PWT-W1-P WAFER-HY2.0-6PWT-W1-P WAFER-PH2.0-2PWT-W1-P
WAFER-SH1.0-6PWT-W1-P WAFER-SUR0.8-4PLT-W1-P WAFER-HY2.0-10PWT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-MX1.25-5PLT-W1-P WAFER-SH1.0-11PLT-W1-P
WAFER-SUR0.8-14PWT-W1-P WAFER-VH3.96-5PWT-W1-P WAFER-MX1.25-2PWZ-C22-9T
WAFER-MX1.25-4PWZ-C22-9T WAFER-XH2.54-12PWT-W1-P WAFER-XHB2.54-7PWT-W1-P
WAFER-ZH1.5-2PWT-W1-P WAFER-HY2.0-6PLT-W1-P WAFER-TJC8-2.54-12PZZ
WAFER-VH3.96-3PWT-W1-P WAFER-HY2.0-4PWT-W1-P WAFER-SH1.0-8PWT-W1-P
WAFER-ZH1.5-2PLT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-12PWT-W1-P
WAFER-TJC8-2.54-2PWZ WAFER-MX1.25-5PZZ-C22-9T WAFER-SHB1.0-13PLT-W1-P
WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-4PLT-W1-P WAFER-GH1.25-12PLT-W1-P