

REV.	DATE	DESCRIPTION
NC	07/19/99	INITIAL RELEASE
A	08/07/05	UPDATE DRAWING FORMAT

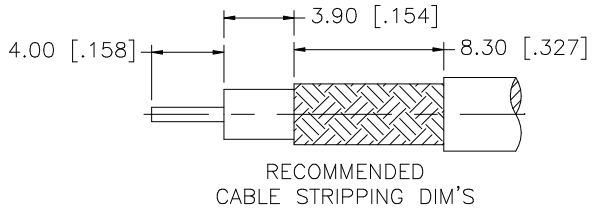

RECOMMENDED
CABLE STRIPPING DIM'S

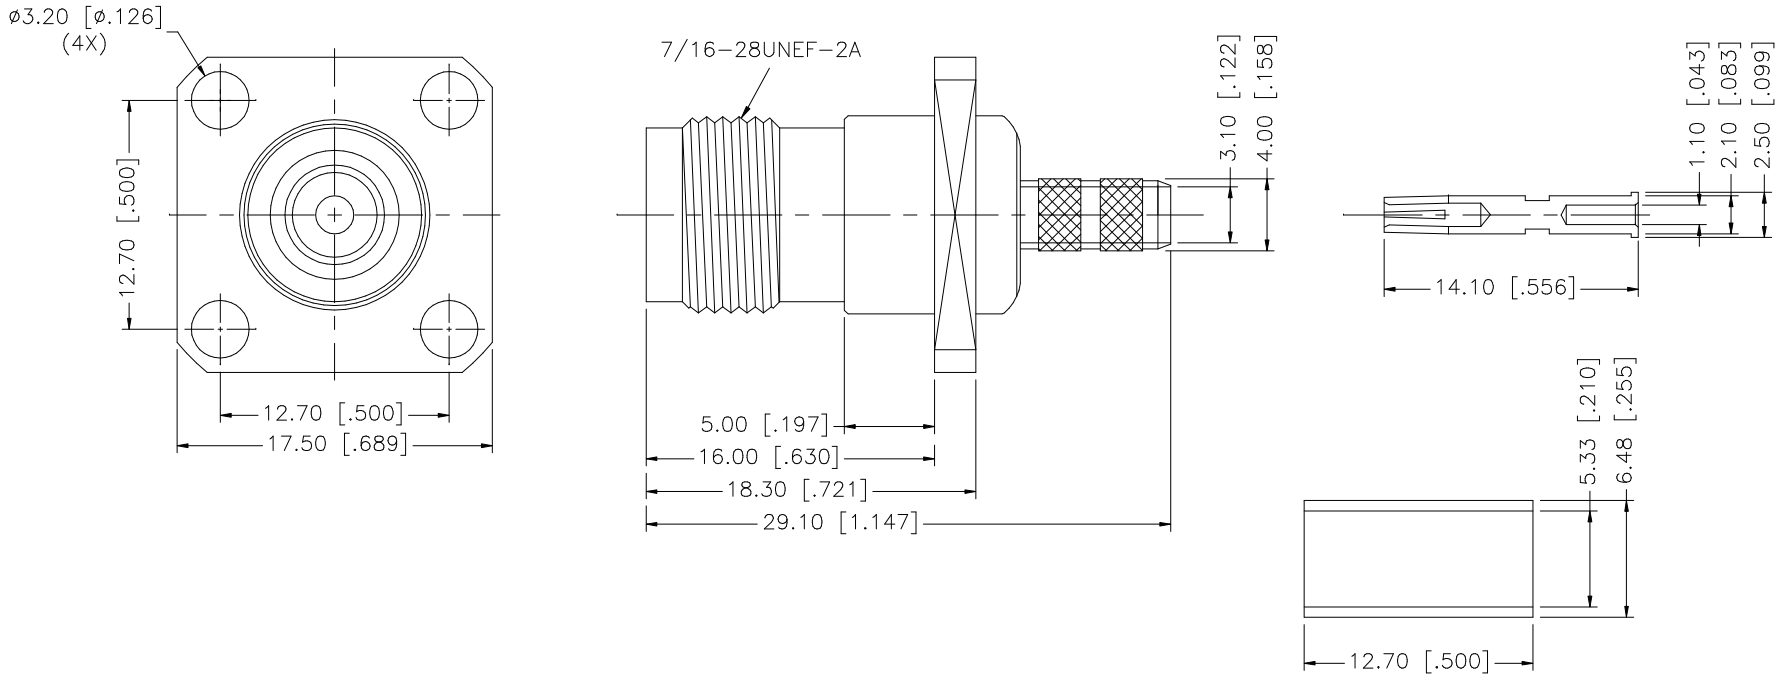

	DESCRIPTION	MATERIAL	FINISH	QTY
8				
7				
6				
5				
4	FERRULE	COPPER	NICKEL	1
3	CONTACT PIN	PHOS. BRONZE	GOLD	1
2	INSULATOR	TEFLON	NATURAL	1
1	BODY	BRASS	NICKEL	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERANCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:

0.5 – 8mm ± 0.20mm
8 – 30mm ± 0.40mm
30 – 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:

.020 – .315 = ± 0.007"
.315 – 1.180 = ± 0.015"
1.180 – 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN G.R.S.	07/31/05
CHECKED	
ISSUED	
SHEET 1 OF 1	

CAD FILE C:/122/122374.DWG

Amphenol Connex

PART DESCRIPTION
TNC CRIMP PANEL JACK
(FOR RG 213/U, 142/U, 400/U CABLE)

PART NO. 122374

DWG. NO.	REV.	SIZE	SCALE
122374.DWG	A	A	NA

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68001-108HLF 68002116HLF 70430-164LF 95157-140LF DAPO15S365TLF LD15P33E4GV00LF RJE061661210 RJSBE5080C2 68000-236HLF 69192-408HLF CD15S13E4RV09LF DEM09P032N 54202-G0805CLF 70218-1116LF 86093968191755E3LF 86130202123355E1LF DCMF37P LD25S33E4GV00LF 54202-S08-07LF 67996-204HLF 76384-316LF 86093488314745V1LF 86093968813H45V1LF D15P13A6RV12LF 65781-158 68001-200HLF 70234-112LF 86093967896755LF 863013A 91614-403ALF