
.079" [2.00 mm]Contact Centers, IDC Sockets, Insulation Displacement With or Without Strain Relief- SFH Series Mates with SBH21 series (See opposite page)

SPECIFICATIONS

- Centered Polarizing Key Optional
- Operating Temperature: -45°C to +105°C
- UL Flammability Rating: 94V-0
- Current Rating: 1 Amp
- Dielectric Withstanding: 500 VAC
- Insulation Resistance: 1000 Megohms

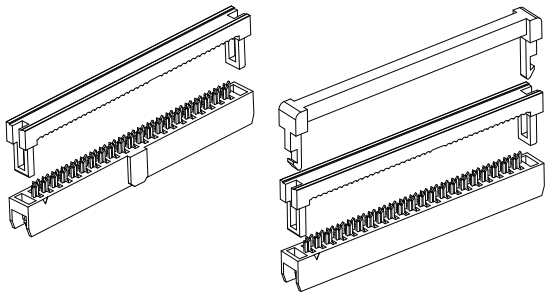

PART NUMBER OPTIONS

SFH21 - P P P N - D 10 - ID - BK - M181

SERIES
SFH21 = IDC Socket Without Strain Relief, .079" [2.00 mm] Contact Centers by .079" [2.00 mm] Row Spacing
SFH213 = IDC Socket With Strain Relief, .079" [2.00 mm] Contact Centers by .079" [2.00 mm] Row Spacing

INSULATOR MATERIAL
P = PBT

CONTACT MATERIAL
P = Phosphor Bronze

CONTACT FINISH - RoHS Compliant
P = Gold Flash Overall
V = Gold Flash on Contact Surface, Nickel on Termination

CONTACT CENTERS
N = .079" [2.00 mm]

NUMBER OF ROWS
D = Dual Row

NUMBER OF CONTACT POSITIONS
03 thru 13, 15, 17, 20, 22, 25, 30, 34 (SFH21)
05 thru 13, 15, 17, 20, 22, 25 (SFH213)


TERMINATION TYPE
ID = Insulation Displacement

COLOR
BK = Black

MODIFICATION (Omit for Standard)
M181 = Without Centered Polarizing Key


DIMENSIONS For complete drawings, go to www.sullinscorp.com or e-mail techsupport@sullinscorp.com

Dimensions in [ ] are in millimeters, all others are in inches.

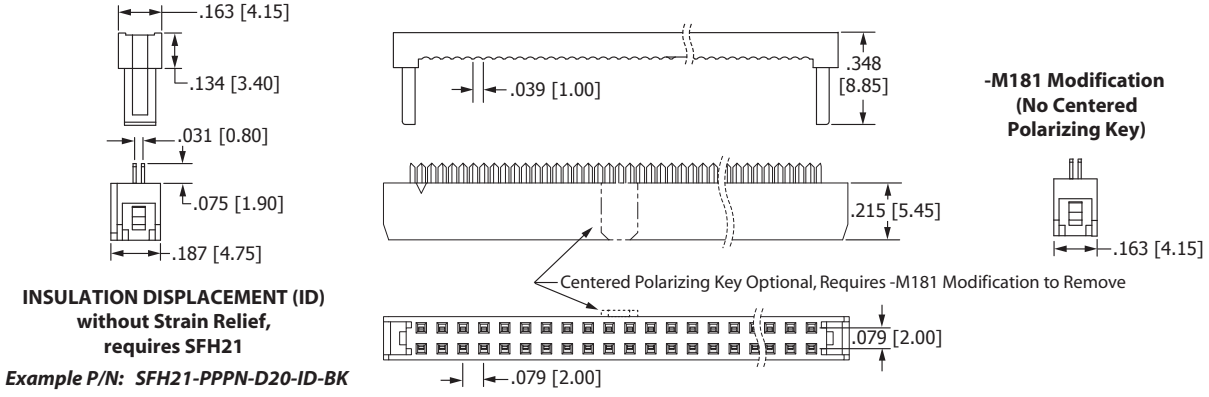

INSULATION DISPLACEMENT (ID) without Strain Relief, requires SFH21

Example P/N: SFH21-PPPN-D20-ID-BK

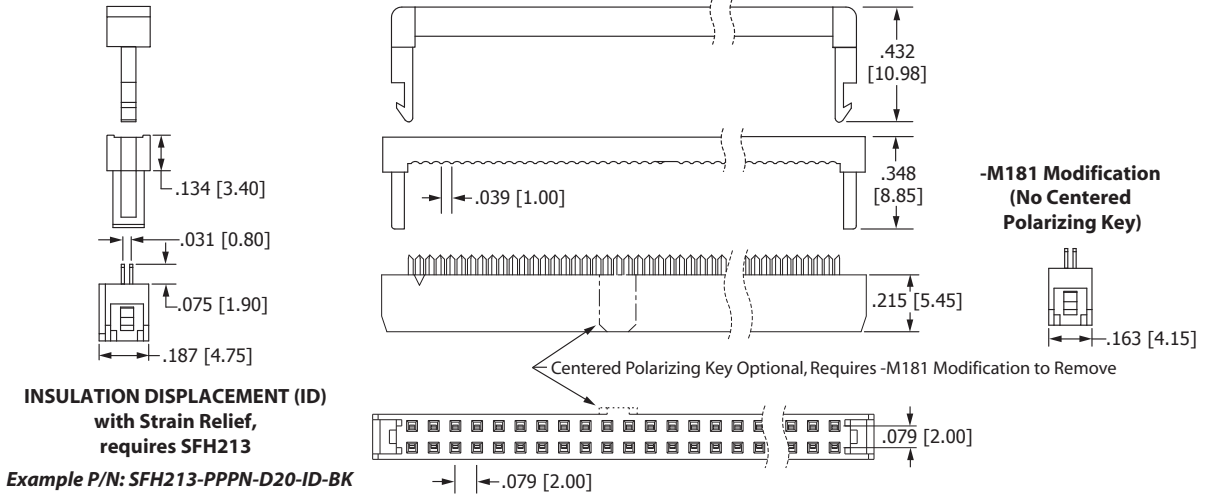

INSULATION DISPLACEMENT (ID) with Strain Relief, requires SFH213

Example P/N: SFH213-PPPN-D20-ID-BK

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Sullins Connector Solutions:

NPPN061BFCN-RC PPPC081LGBN-RC PPPC202LFBN-RC SFH11-PBPC-D05-ST-BK NPPN402AFCN-RC PPPC032LFBN-RC NPPN072FJFN-RC NPPN122FJFN-RC PPPC082LFBN-RC PPPC172LJBN-RC PRPC010DAAN-RC SFH11-PBPC-D17-RA-BK SWR25X-NRTC-S06-ST-BA NPPN062GFNP-RC PPPC071LGBN-RC PPTC231LFBN-RC PPTC281LFBN-RC PREC006DBAN-M71RC PRPC017DAAN-RC EBC10MMNN LPPB102NFSP-RC NPPC021KFXC-RC NPPN082AFCN-RC PEC06DBAN PPTC142LFBN-RC GRPB051VWTC-RC PBC06DBBN PEC08DAAN PPPC142LJBN-RC PPTC132LFBN-RC