




| MAPX | MODIFICATION | DATE |
|---|---|---|
| | | |

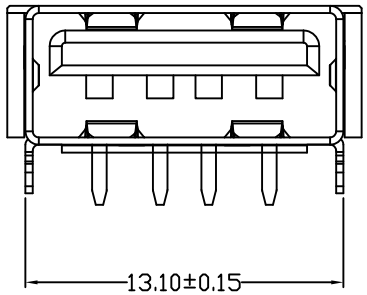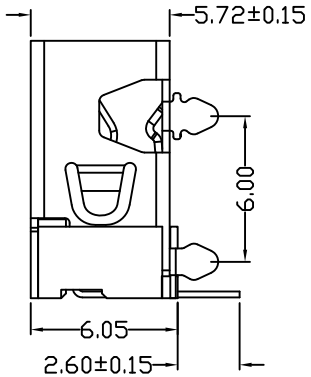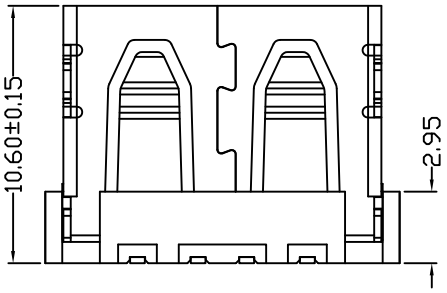





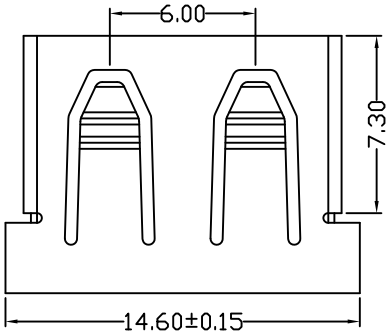

PCB HOLES

Specification:

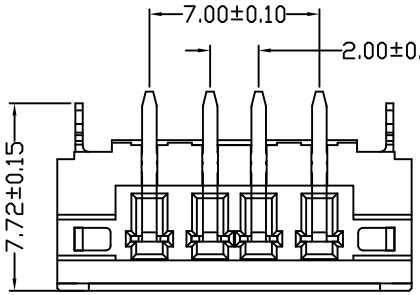1.Electrical Characteristics:

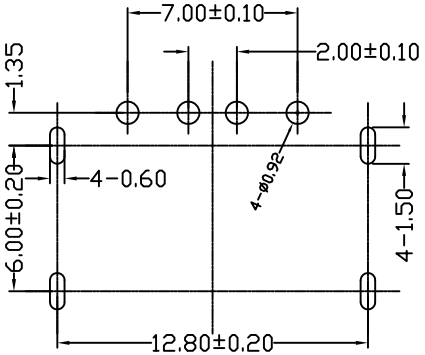Dielectric Withstanding Voltage: AC 500V/1MINUTE.

Insulation Resistance: 1000 MΩ\Min.

Contact Resistance: 30 mΩ\ Max.

2.Mechanical Characteristics:

INSERTION FORCE: 30N(3.06Kgf) MAX

EXTRACTION FORCE: 10~30N(1.02~3.06Kgf)

Durability:1500cycles.EXTRACTION FORCE:10~30N(1.02~3.06Kgf)

**3. Material:**

Terminal: Phosphor Bronze, C5191/C2680R-EH T=0.25

Plating: Gold 0.76 um Min plating over 1.27 um Min Nickel underplate, 2.54 um Min Sn selective plating on solder tail;

Shell: Bronze, C2680R-H =0.30mm

Plating: Nickel underplate 2.54 um Min;

Housing: LCP Black

4.Environmental:

Operating Temperature: 0°C to +85°C.

| 产品图 PRODUCT CHART DWG | | | |
|---|---|---|---|
| 公差一览表 TOLERANCE UNLESS OTHERMSE | | | |
| X. | ±0.25 | X. | ±5.° |
| .X | ±0.20 | .X | ±2.° |
| .XX | ±0.15 | .XX | ±1.° |
| .XXX | ±0.05 | .XXX | ±0.5° |

# 深圳市精拓金电子有限公司

| | | | | | |
|---|---|---|---|---|---|
| 单位 UNITS | MM | 制图 DRAWING | Z-Y-B | 制图料号 PRODUCT PART NO. | 914-441A1011D10200 |
| 比例 SCALE | 1:1 | 审核 CHKD | | 产品名称 PRODUCT NO. | AF10.6苹果款四脚尖弹铁壳PBT白偏蓝DIP插拨力小 |
| 日期 DATE | 2011.09.02 | 核准 APPD | | 角法 VIEW | 版本 VER A0 |

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## Jing extension:

904-331B2032S10200 911-221A2021S10100 912-112A1011D10100 906-552A1012D10200
910-151A2021D10100 912-312A1012D10100 917-P81A202ES60201 920-154A2021Y10110
920-C52A2021S10105 907-312A1101Y10210 918-415K3028S40000 918-418K2022Y40011
920-A62A2021S10104 920-C62A2021S10103 920-F52A2021S10105 904-232A2031S10100
916-151A1022Y10200 917-B88C201AH70201 918-318K2023C40005 919-162A1012D10400
906-262A1021D10200 905-761A2032S10200 908-351A1011D10100 906-752B1114D10200
912-112A2021S10100 918-468K2029Y50000 920-A62A2021S10108 904-232B2032S10100
907-111A1022D10200 920-A64A2091S101A3