





Specifications
Current Rating:1.3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Moisture sensitivity level: 1
Operating Temperature:−55°C to +125°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP or the equivalent material
All materials must meet GREENCONN hazardous substances control standards.

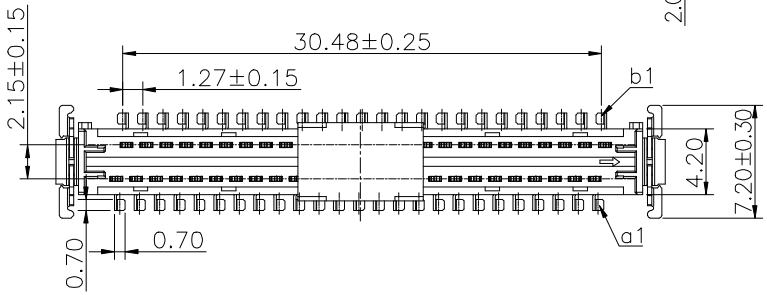

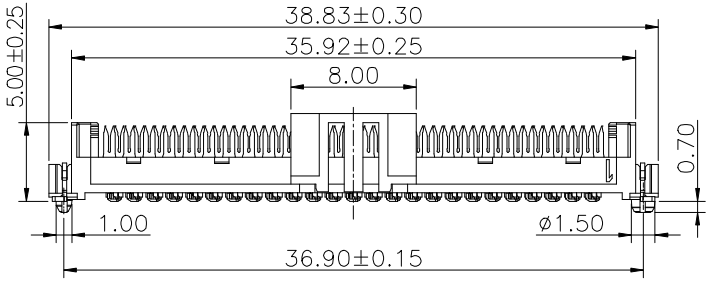



Recommended P.C.Board Layout
(Tolerance:±0.05)

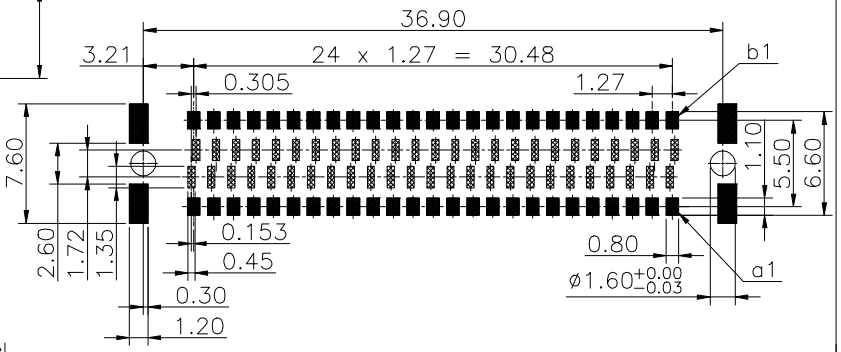

Ordering Information

G QEC201 − XX XX B 001 C X S X

- XX: No. of Pins per Row — 25
- XX: Standard Plating — 22=Matte Tin
- B: Color — 1=Black
- X: Standard Packing — F=CAP+Tape&Reel

格稜股份有限公司 Greenconn Corporation	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. GQEC201−CB1CS	TITLE. 1.27 DRC board on IDC 50−polig50−contacts
	X.°±5.°	X.±0.30	CHECKED:	DATE:		
	.X°±3.0°	.X±0.25	CO SIGNED:	DATE:	PART NO. GQEC201−25XXB001C1SX	
	.XX°±2.0°	.XX±0.15	APPROVED:	DATE:		
	.XXX°±1.0°	.XXX±0.10				
REV. 02	UNIT. mm	SCALE. 5:2	PAGE. 1/1			

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

GREENCONN:

CBED201-2579B001C1AD CBEC201-2579B001C1AF CBED201-3479B001C1AD GBEC202-4079B001C1AF
CBEC201-1379B001C1AF CBEC219-3479B001C1AF CBEC220-4079B001C1AF GBEC208-4005B001C1AF
GBED202-3479B001C1AD GBED202-4079B001C1AD GPCD101-0402A003C1AH
GPEC208-0502A085C1BC CBEC201-4079B001C1AF CBED201-4079B001C1AD CBEC201-3479B001C1AF