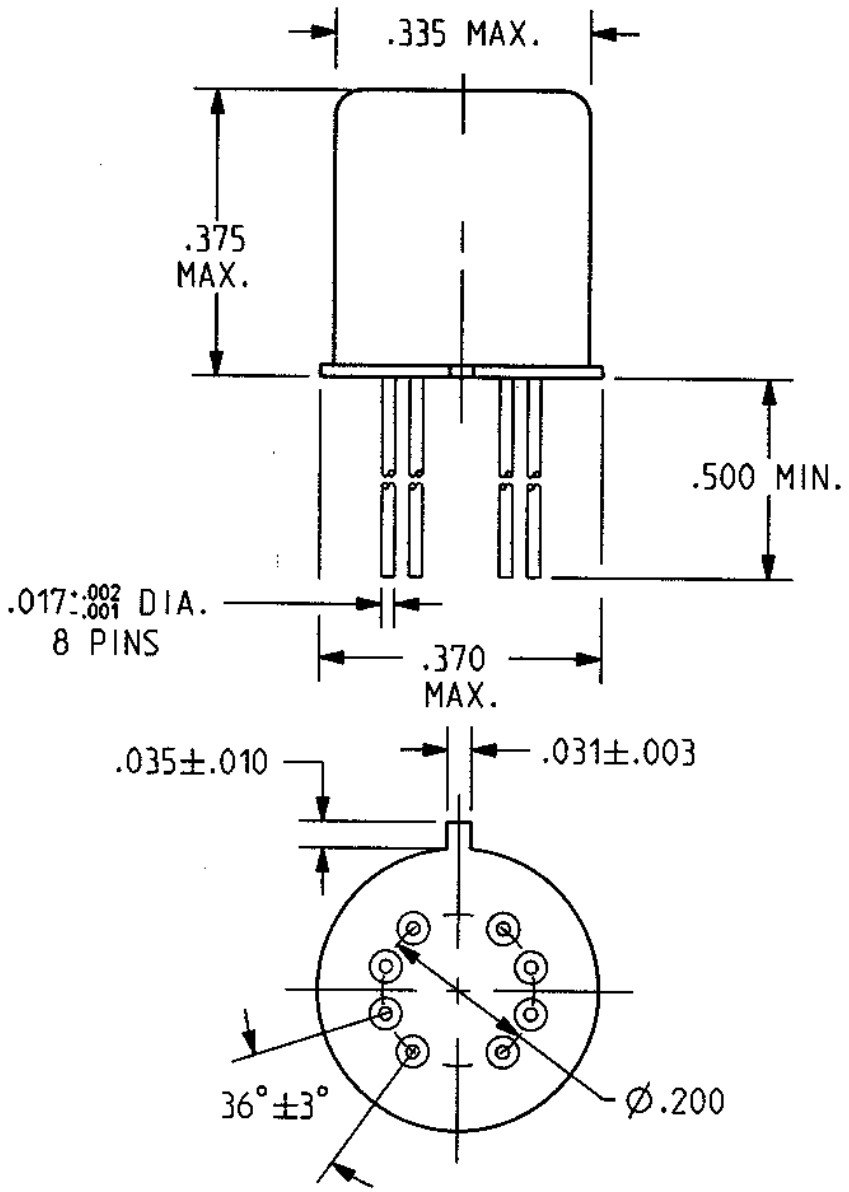


REV. 0

DCO 143715

COIL: @ 25°C

RESISTANCE	850 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX., 0.64 VDC MIN.

ENVIRONMENT:


VIBRATION 10 Hz TO 3000 Hz @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX.
RELEASE TIME 2.0 MS MAX.
CONTACT BOUNCE 1.5 MS MAX.

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 09JAN03 CK JEBA 01/09/03

CII Technologies™
advanced control electronic solutions

CUST.

CUST. NO. COTS STD REV.

"PRMS" RELAY

PRMSC-12X

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1393431-1 3-1393225-0 MPT100C18RF SMW73R0JT 650075-000 917696-1 CPF0402B37K4E1 SBCHE154R7K 1-794222-0 175977-2 2005330-1 3430B2F51RTDF ROX05SJ18R TE50BR39J U5254-000005-030PA 1903112-2 2834055-1 3631B101LL 1-962915-1 1969656-1 2377783-2 RH73H2A40MKTN SBCHE64R7K 141991-2 2-292161-3 936348-1 CRGCQ2010J3K3 1743455-2 2310537-1 2380312-2