SPXO 3225（163-B SERIES）



FEATURES

- Small size
- Low phase noise version available
- Low current consumption version available
- Conforms to AEC-Q100 (Optional)
- RoHS Compliant and Pb Free

Electrical Specifications

Parameters		Specifications		
Output Waveform 输出波型		CMOS		
Frequency Range 频率范围		32.768KHz	1MHz ~50MHz	50MHz ~ 160MHz
Supply Voltage Range (Vdd) 工作电压范围		1.0V ~ 5V		
Overall Frequency Stability 总频率偏差		±25ppm, ±30ppm, ±50ppm or specify		
Operating Temperature Range 工作温度范围		-20°C ~ +70°C, -40°C ~ +85°C, -40°C ~ +125°C		
Current Consumption (Idd) 消耗电流		100uA Max.	10mA Max.	
Rise & Fall Time 上/下沿时间		20ns Max.	8ns Max.	3ns Max.
Output Symmetry 输出对称性		45% ~ 55%		
Output Voltage 输出电压	V_{OH}	90% VDD		
	V_{OL}	10% VDD		
Output Load 输出负载		15pF		
Start-up Time 起动时间		10ms Max.		
Storage Temperature Range 储存温度范围		-55°C ~ +125°C		

** Inclusive of initial frequency tolerance at 25°C, operating temperature range, supply voltage change, load variation and 1st year aging.
包括在常温频率偏差，工作温度范围的频率偏差，首年老化率，工作电压及负载变化造成的频率偏差。
Please consult our sales representatives for other specifications. 如对其他规格查询，请与我司销售人员联系。

Dimensions

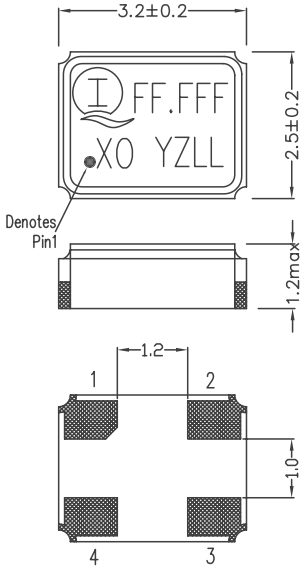

PIN CONNECTION

P/N	1631
1	Enable/Disable
2	GND
3	Output
4	VDD

DIMENSION (mm)

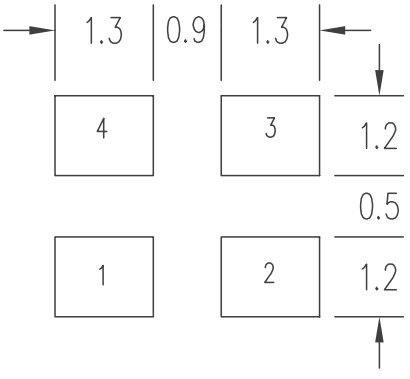

SOLDERING PATTERN (mm)

All specifications are subject to change without prior notice. 本公司保留修改规格的权利。

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

INTERQUIP:

5YMA26000071SF30E1 5YAA12000183TF60E3 1631-25003-BKBEYA 1681-24005-BTBEYA 5NAA32000091KF60E1 5NMA40000091KF40EB 5YAA12000121KFA0E1 5YAA12000201KFA0E1 5YMA12000122KFA2E3 5YMA40000151SF40E1 9CAA32768122TF70ET 1631-50003-BTBEYA 5NAA24000101KF80E2 5NMA26000091KFA0E1 5YAA08000121TFC0E3 5YAA25000201TF40E2 1631-24003-BTKEYA 5XAA08000202TF80E3 5XNA08000122KFA0E2 5YAA16000091KF80E1 5YAA25000121TF25E2 5YAA27000202TF60E3 5YMA24000121KF40E2 5YMA25000122KF50E2 5YMA26000091SF30E1 5YMA27120091KF50EB 1631-08005-BKBEYA 5YAA16000122TF80E3 5YAA24000201KF60E1