

# 1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN/POLE IN LINE PIN SPACING 5 MM / 0.197 IN WITH PUSH BOTTONS

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

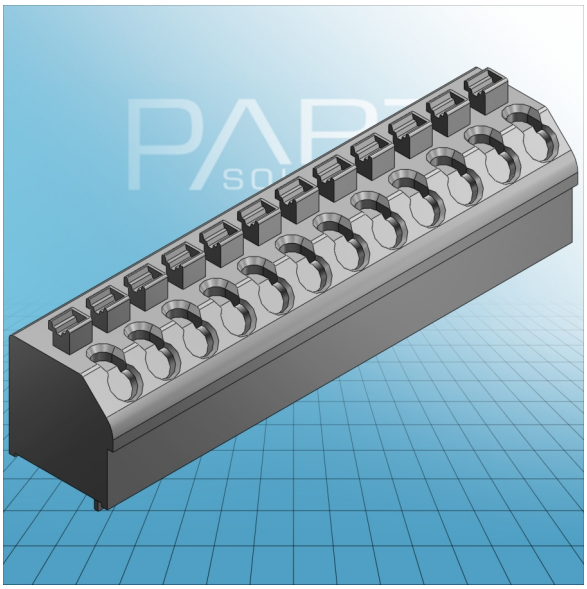

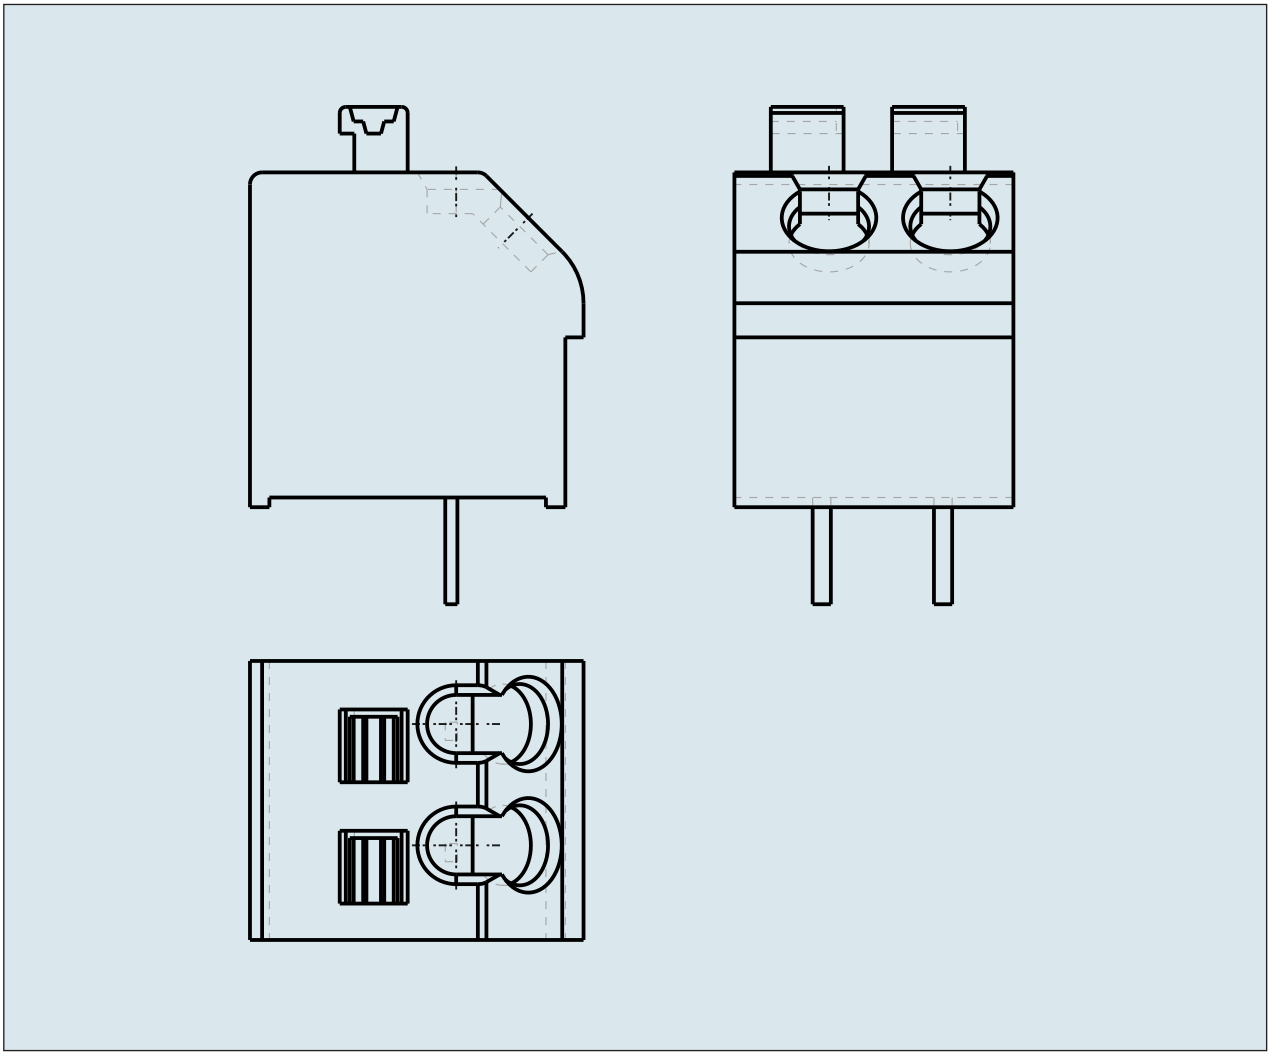

# 1-CONDUCTOR PCB TERMINAL STRIP 1 SOLDER PIN/POLE IN LINE PIN SPACING 5 MM / 0.197 IN WITH PUSH BOTTONS

250-502 TO 250-516

PDF DATASHEET

© 1992 - 2011 CADENAS GmbH

| | |
|---|---|
| **ITEM-NO. (ITEM-NO.)** | 250-512 |
| **Cross section1 (Cross section / mm²)** | 0.5 - 1.5 |
| **Cross section2 (Cross section / AWG)** | 20 - 14 |
| **Strip length (Strip length / mm)** | 9 - 10 |
| **Measured voltage (Measured voltage / V)** | 320 |
| **Measured shock voltage (Measured shock voltage / kV)** | 4 |
| **Pollution degree (Pollution degree)** | 2 |
| **Current intensity (Current intensity / A)** | 17.5 |
| **RM (PIN SPACING / mm)** | 5 |
| **P (NO. OF POLES)** | 12 |
| **Height (Height / mm)** | 16.5 |
| **Width (Width / mm)** | 61.5 |
| **Depth (Depth / mm)** | 13 |
| **No. of connection Points (No. of connection Points)** | 12 |
| **No. of potentials (No. of potentials)** | 12 |
| **COLOR (COLOR)** | grau |
| **Comment (Comment)** | L = (No. of poles x Pin Spacing) + 1.5 mm |
| **Dimensions (Dimensions)** | 1.2 -0.1 mm |