

环保物料

TEL:0769-82001899

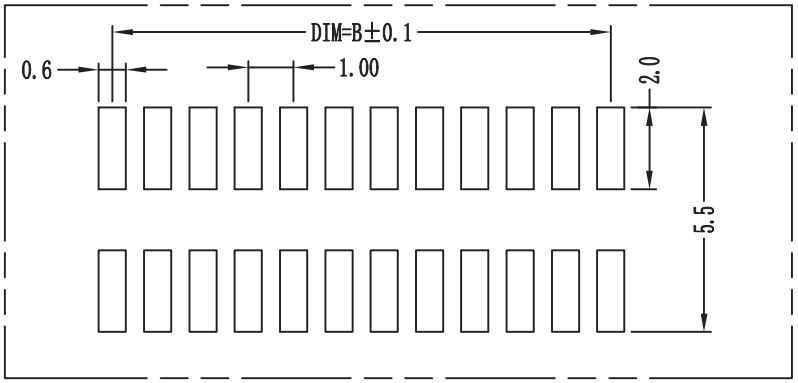


PCB Layout

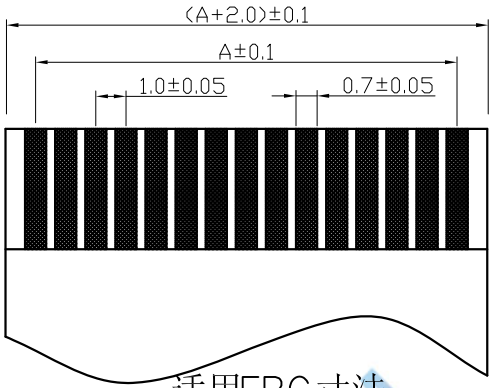

适用FPC寸法

APPLICABLE FPC

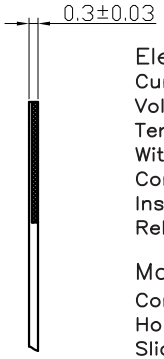



Electrical Characteristics:

Current rating: 0.5A AC/DC
Voltage rating: 50V AC/DC
Temperature range: −25°C~+85°C
Withstand Voltage: 500V AC/Minute
Contact Resistance: ≤ 30mΩ
Insulation resistance: ≥ 500mΩ
Relative Humidity: 93%+40°C

Material Description:

Contact: Phosphor Bronze Tin−Leadplated
Housing: HEIGHT TEMP. PLASTIC(UL94V−0)
Slider: HEIGHT TEMP. PLASTIC(UL94V−0)

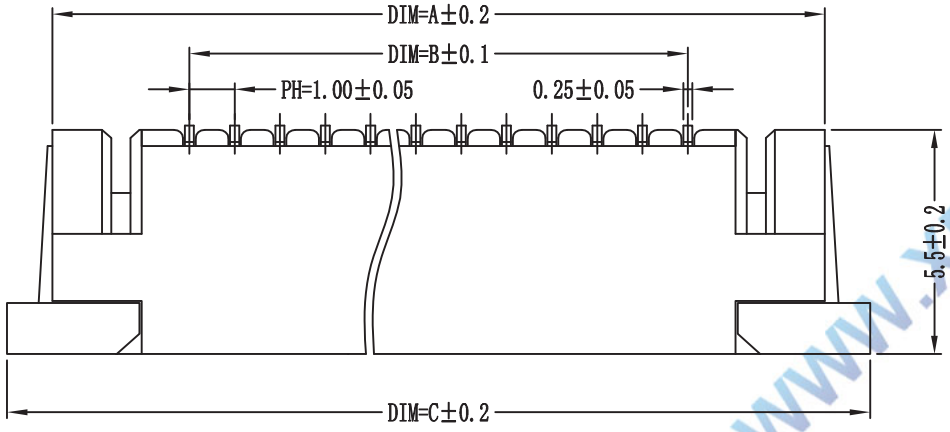



WWW.XFCONN.COM

F1003-V-xx-25T-x

- V=一字脚位
- Pin位数
- T=镀锡 G=镀金
- R=卷装 无=管装

PIN数	DIM=A	DIM=B	DIM=C	DIM=D
30P	35.0	29.00	37.0	31.10
29P	34.0	28.00	36.0	30.10
28P	33.0	27.00	35.0	29.10
27P	32.0	26.00	34.0	28.10
26P	31.0	25.00	33.0	27.10
25P	30.0	24.00	32.0	26.10
24P	29.0	23.00	31.0	25.10
23P	28.0	22.00	30.0	24.10
22P	27.0	21.00	29.0	23.10
21P	26.0	20.00	28.0	22.10
20P	25.0	19.00	27.0	21.10
19P	24.0	18.00	26.0	20.10
18P	23.0	17.00	25.0	19.10
17P	22.0	16.00	24.0	18.10
16P	21.0	15.00	23.0	17.10
15P	20.0	14.00	22.0	16.10
14P	19.0	13.00	21.0	15.10
13P	18.0	12.00	20.0	14.10
12P	17.0	11.00	19.0	13.10
11P	16.0	10.00	18.0	12.10
10P	15.0	9.00	17.0	11.10
9P	14.0	8.00	16.0	10.10
8P	13.0	7.00	15.0	9.10
7P	12.0	6.00	14.0	8.10
6P	11.0	5.00	13.0	7.10

VER	MODIFICATION	DRAW	DATE
A0			

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X°	±5°
.X	±0.20	.X°	±2°
.XX	±0.08	.XX°	±1°
.XXX	±0.03	.XXX°	±0.5°

DRAWN	CK tan
CHKD	
APPD	
VIEW	

XFCN兴飞连接器有限公司
CONNECTORS XFCN CONNECTORS CO., LTD.

PRODUCT NAME	FPC 1.00mm Connectors
PART. NO.	F1003-V-XX-25T

SHEET	1/1
DATE	2010.4.12
UNITS	mm
SCALE	1:1
DWG NO.	009

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

M1250VS-05P M2010V-04P P1257-05P XF-P000223 XF-P00099 XF-P00126 XF-P00092
F1003-ZV-26-25T-R M2545V-02P PZ200V-11-08P XF-P00014 XF-P000167 XF-P00115 PZ254V-11-11P
XF-2501L3003P3 XF-P000143 M2016V-05P XF-P00065 M2010V-07P PZ200V-11-05P P1257-04P
T2026PS-2 XF-P000141 F1001-T-16-25T-R XF-P00001 XF-P000159 XF-P000237 M2016V-08P
TT44080080-0820 XF-12571503P3