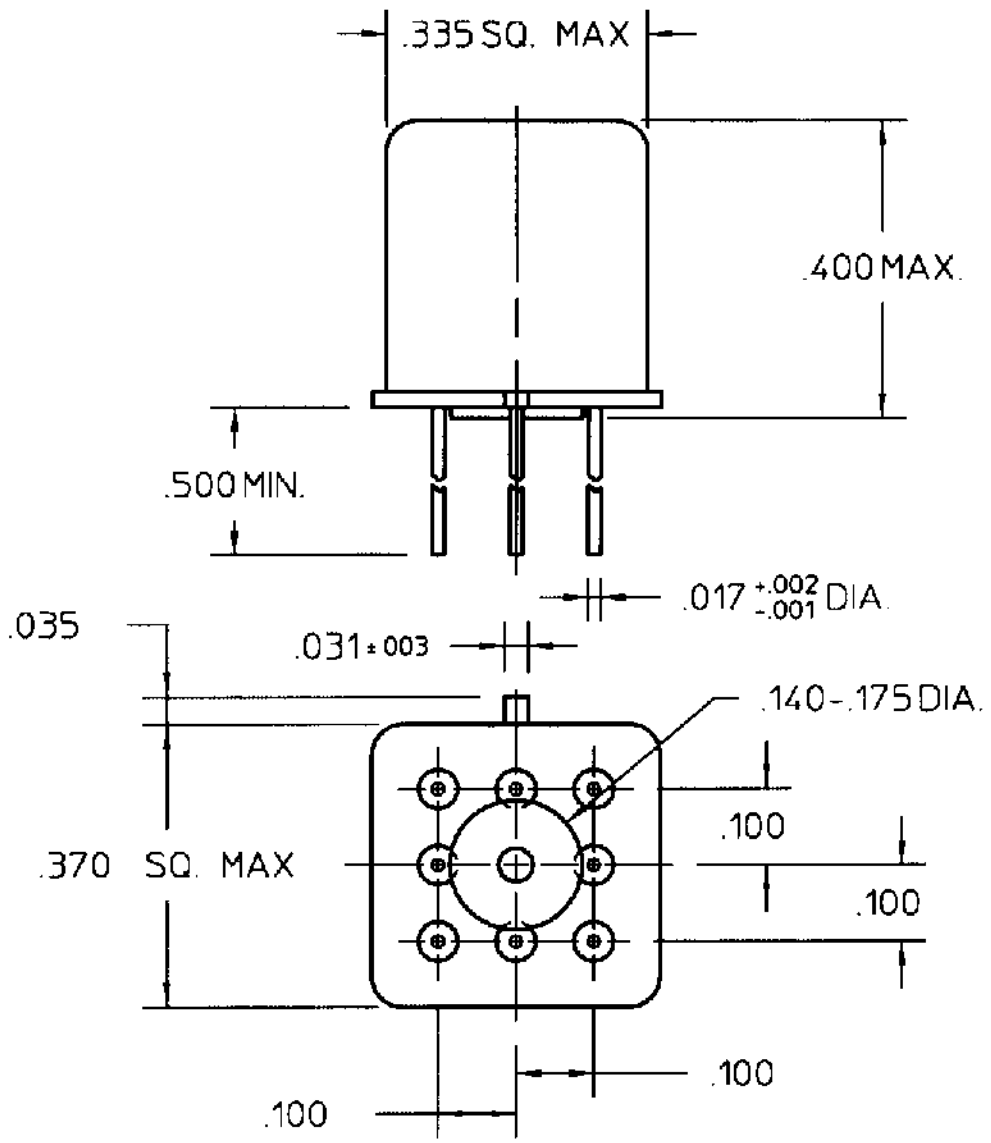


COIL: @ 25°C

RESISTANCE	800 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	7.0 VDC
MUST RELEASE	4.0 VDC MAX, 0.64 VDC MIN.

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. R.B. 11/5/96 CK

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/42-051M

TYPE JMGSD RELAY

JMGSCD-12MW

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-292161-3 650075-000 ROX05SJ18R SBCHE154R7K 2834055-1 1393431-1 141991-2 1903112-2
2005330-1 3-1393225-0 917696-1 1969656-1 3430B2F51RTDF 936348-1 SMW73R0JT 2380312-2
1-962915-1 175977-2 CRGCQ2010J3K3 SBCHE64R7K 2310537-1 2377783-2 RH73H2A40MKTN
U5254-000005-030PA 1743455-2 3631B101LL CPF0402B37K4E1 1-794222-0 MPT100C18RF TE50BR39J