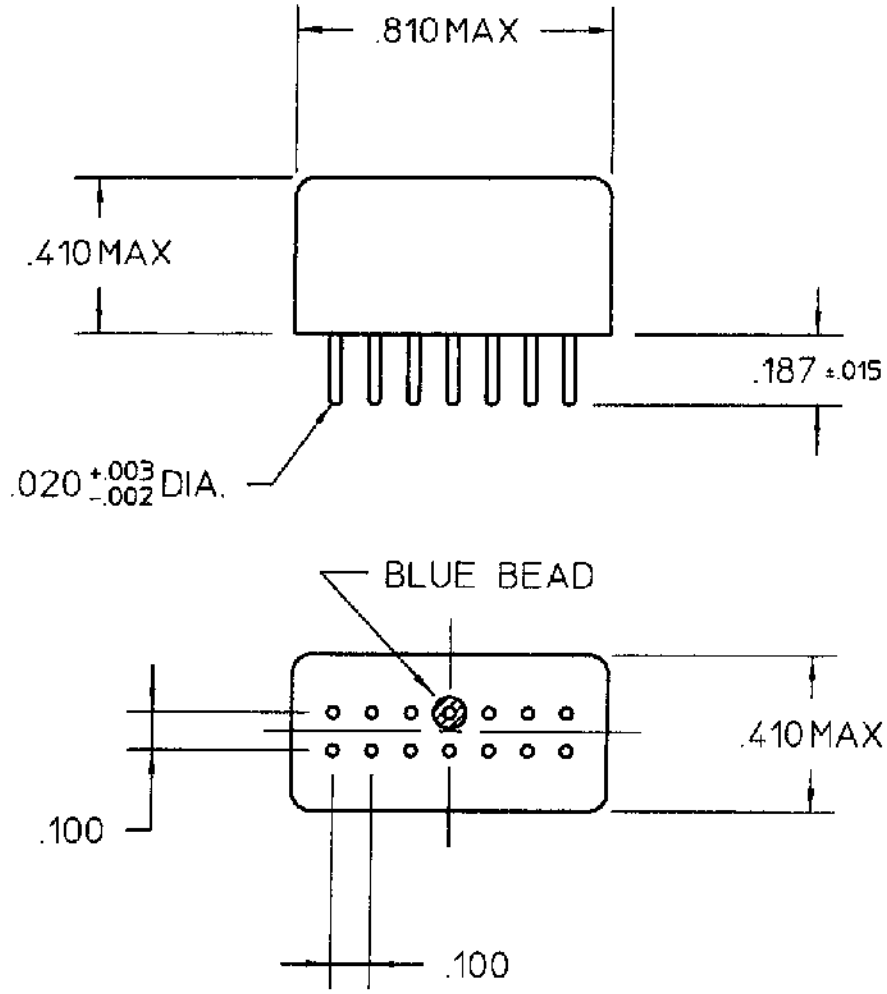


REV. 7
DCO 63333

COIL: @ 25°C


RESISTANCE	100 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	10.1 VDC MAX. 0.92 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's
SHOCK 100 g's 6 MS. DURATION
TEMPERATURE -65 °C TO +125 °C

NOTES: (LEVEL L ACCEPTANCE TESTING ONLY)
OPERATE & RELEASE 7 MS MAX.
(INCLUDING BOUNCE)

CUSTOMER DATA SHEET

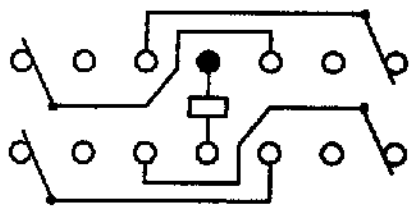

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2 AMP 28 VDC RESISTIVE

DR. R.B. 10/16/90 | CK TLG 10-24-00

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M39016/40-010 REV.

"SR" RELAY

SR-7610

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:
SR-7610