
Part Number : 417920513
Product Description : KK 396 Header, Right-Angle with Friction Lock, 4 Circuits, 0.38µm Gold (Au) Selective Plating
Series Number : 41792
Status : Active
Product Category : PCB Headers and Receptacles

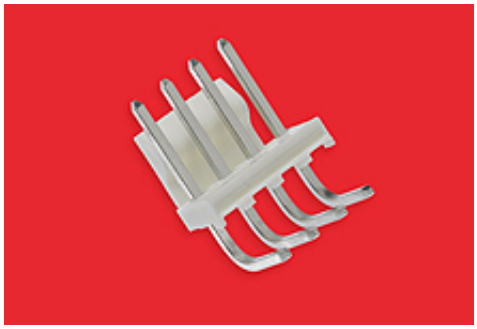

Documents & Resources

Drawings

Drawing_417920513_sd.pdf
Packaging Design Drawing_PK-41792-002-001.pdf

3D Models and Design Files

3D Model_417920513_stp.zip
Symbol Footprint Data_SYM-26-60-5040-001.zip

Specifications

Product Specification_PS-08-50-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)4144-DC (27 June 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	PCB Headers and Receptacles
Series	41792
Description	KK 396 Header, Right-Angle with Friction Lock, 4 Circuits, 0.38µm Gold (Au) Selective Plating
Application	Power, Wire-to-Board
Component Type	PCB Header
Product Family	KK Interconnect Systems
Product Name	KK 396
UPC	800756027241

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	7.0A
Voltage - Maximum	250V

Physical

Breakaway	No
Circuits (Loaded)	4
Circuits (maximum)	4
Color - Resin	Natural
Durability (mating cycles max)	50
Flammability	94V-0

Glow-Wire Capable	No
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	1.904/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Bag
PC Tail Length	3.96mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	3.96mm
Plating min - Mating	0.381µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Partial
Stackable	Yes
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

Mates With / Use With

Mates with Part(s)

Description	Part Number

KK 3.96mm Single Row Crimp Housings	2139
KK 3.96mm Single Row Crimp Housings	3069
KK 3.96mm Crimp Housings	41695
KK 396 PC Board Connector	41815
KK 3.96mm Pitch Single Row Crimp Housings	6442

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

398800403 459705185 190990010 0190700155 190670071 190990009 0190690033 152660117
436803002 447641402 447691602 152670357 190730231 417920538 430451220 447642001 760475001
190690096 397730002 430450225 444280402 0436802002 152670269 439151216 759001161
5046940301 0436400901 151660057 151670255 152670251