Operation: Push-Pull




ROHS

LTEM NO.:CZ-520

(MINI-USB-SOCKETS)

Unit:mm

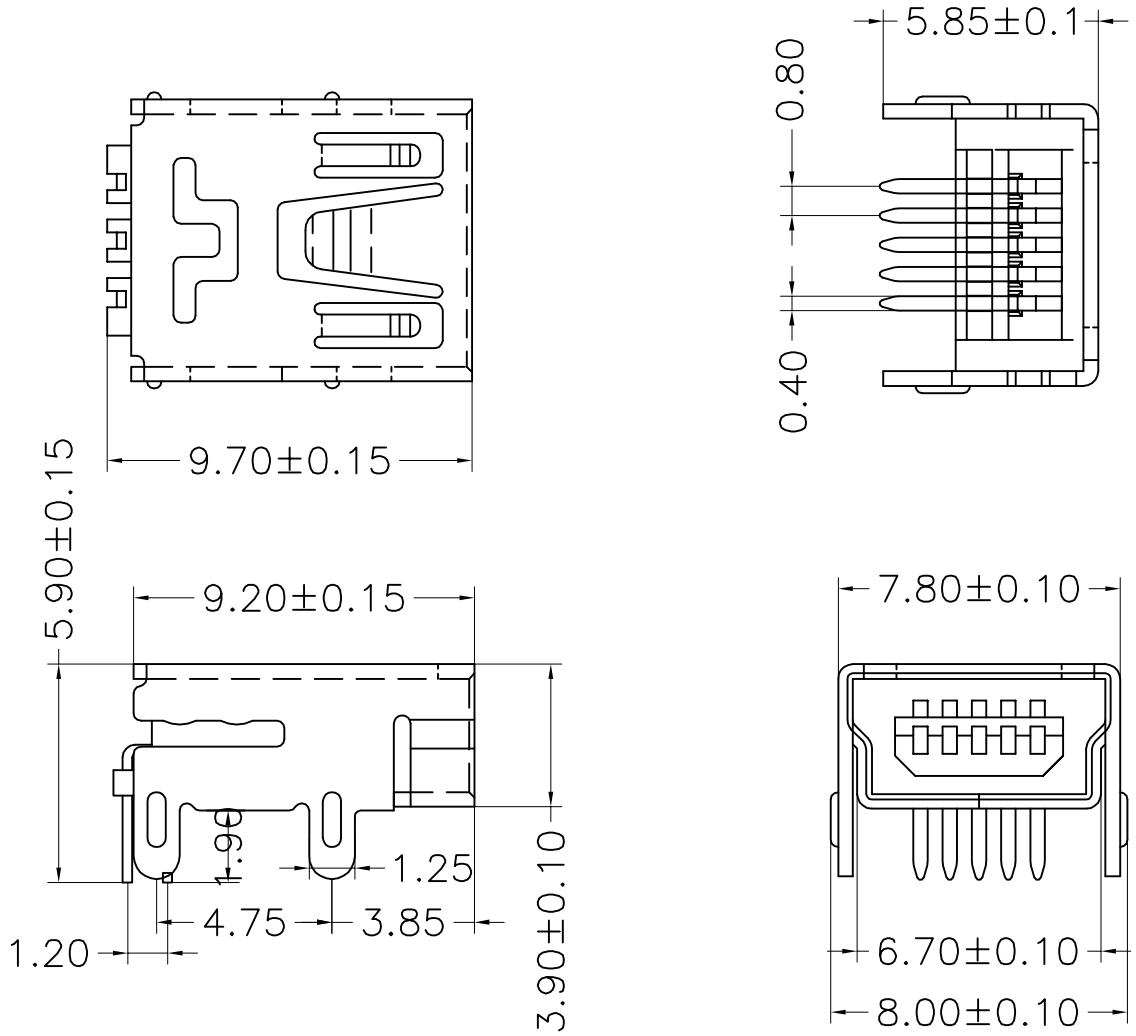

Technical parameter

PROJECT \ LEVEL		A[better product]	B[average product]	C[low product]
Electrical Properties	Initial Contact Resistance	30mΩ max.	30mΩ max.	no data!
	Contact Resistance	100MΩ min.100V DC Skey/PD: 50MΩ min.100V DC		
	Withstand Voltage	300V AC for 1min	250 V AC for 1min	
Durable Performance	There No Load	6,000 Cycles	**5,000 Cycles**	no data!
	Rated Load	5,000 Cycles 50mΩ max.	**4,000 Cycles 30mΩ max.**	no data!
Insertion Force		4.0Kgf MAX (Springback:)		

表面貼裝 SMT


側向導入 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

CIRCUIT BOARD SIZE
(Vertical view)

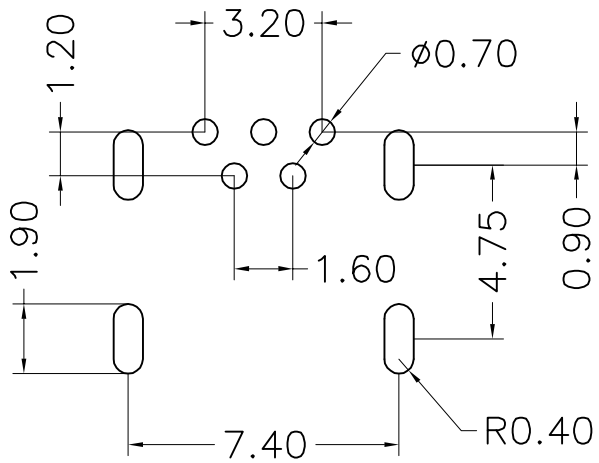

PIN Assignment

Material declaration			
No.	**NAME**	**Type**	**Description**
①	胶芯	1	LCP 热塑性[Black]
②	接触端子	5	磷铜 C5191(镀金 1u〞/焊区雾锡)
③	外壳	1	黄铜 C2680/SPCC[镀镍 40u〞min]

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。Products do not belong to hazardous waste,When waste can recycling processing

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生；運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25℃,濕度在 50℃以內],不可導致材料變形或氧化。

注記 NOTICE

1. 碩方電子公司擁有最終解釋權；The company reserves the right of final interpretation；
2. 文件禁止外洩、轉載；Leaked and reproduced prohibited；
3. 未經授權修改無效。Modify is invalid.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

SOFNG:

SD-001 SIM-002-P7 SIM-024X TS-1102N-4326 USB-302SD 05DS-10PS 05XS-8P CZ-520 DC-028A-T25 DC-044A-T25 TF-005 SMO-1510 TF-001B TS-1807R-2026 MC-324 MS-1290 SD-008 MC-322D DC-044-T25 MC-312D-C TS-1102W-5526 TS-1187-2026 TS-1817A-5026 DC005-T20 HDMI-519 SS-12D00-G3 TS-1102S-4326 U30-07D USB-102SD-P4 MS-213J