

RoHS

REV	ECN NO.	DESRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	更换图框			2024.05.24

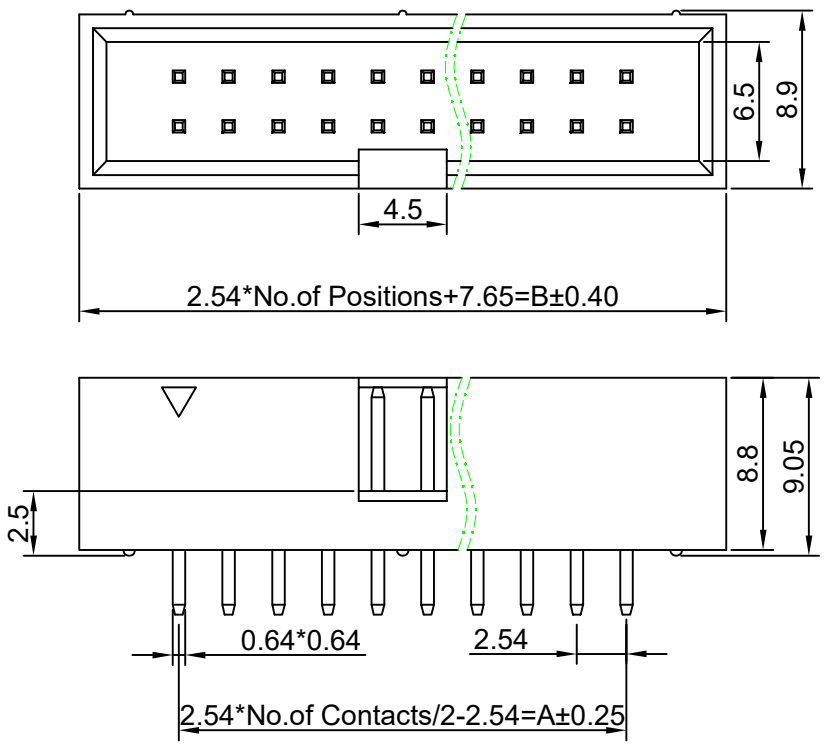

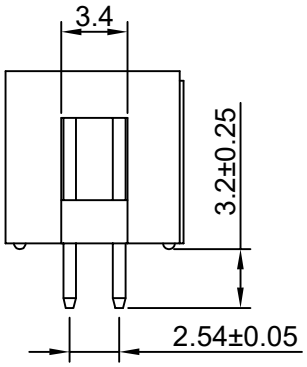

SPECIFICATIONS
1. Current rating: 3A
2. Temperature range: -40°C ~ +105°C
3. Insulation resistance: 1000MΩ Min.
4. Withstanding voltage: 600V AC/ minute.
5. Contact resistance: 20mΩ Max.


Material:
Insulator Material:PBT (UL 94V-0) Black
Contact Material:Copper Alloy
Plating:Matte Tin or gold plated over Nickel

Ordering Code:

BH254V-xxP
1 2

1.序列号
2.Pin位数: 2x03=06P

No.of PIN/ROW	Dimension A	B
2x03	5.08	15.27
2x04	7.62	17.81
2x05	10.16	20.35
2x06	12.70	22.89
2x07	15.24	25.43
2x08	17.78	27.97
2x09	20.32	30.51
2x10	22.86	33.05
2x12	27.94	38.13
2x13	30.48	40.67
2x15	35.56	45.75
2x17	40.64	50.83
2x19	45.72	55.91
2x20	48.26	58.45
2x25	60.96	71.15
2x30	73.66	83.85
2x32	78.74	88.93

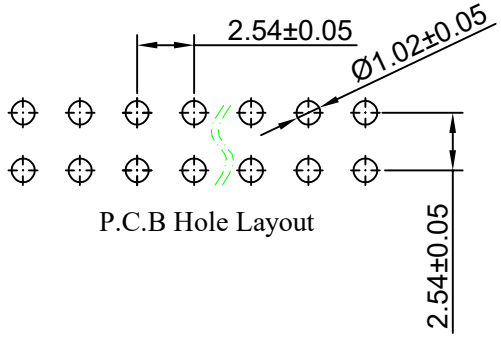

P.C.B Hole Layout

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: BH254V-xxP

TITLE: 2.54mm Box Header Connectors

XFCN兴飞连接器
0769-82001899
www.xfconn.com

DWG NO: /

APPD	Chen ZhiQiang			
CHKD	Liu Wei	VIEW		
DRAW	Chen HongJiang	SCALE	SHEET	REV
DATE	2024.07.19	NONE	1/1	A1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XFCN:

M2016VS-04P MF200V-12-20-0740 M1510V-09P M1201RS-06-BK M1010VS-2x08P M2501RF-08P M3960R-04P M3025V-2x7P M3961R-02P PM254V-12-08-H85 MF254V11-05-1000-H70 M2508R-08P M2016R-07P M2510V-05P PZ254R-12-20P PM200VS-12-08-H43 TT56120177-1385 PM200V-11-12-H43 M4202V-K-2x2-N2 M1010VS-2X10P M4202V-2x7P M3025R-1x6P M0611RS-10-GB M3961V-05P M2020V-2x6P M2029VS-06P M3025V-2x11P M3025R-2x10P M3965V-10P M2501R-K-04P