

LOC	DIST

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE PER ECO-14-010245	05AUG2014	DM	DM
	A1	REVISED PER PCN E-18-002290	15FEB2018	DD	DM
	A2	REVISED PER PCN E-19-014637	02OCT2019	JA	IG

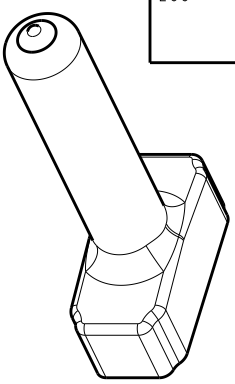

SCALE 3:4

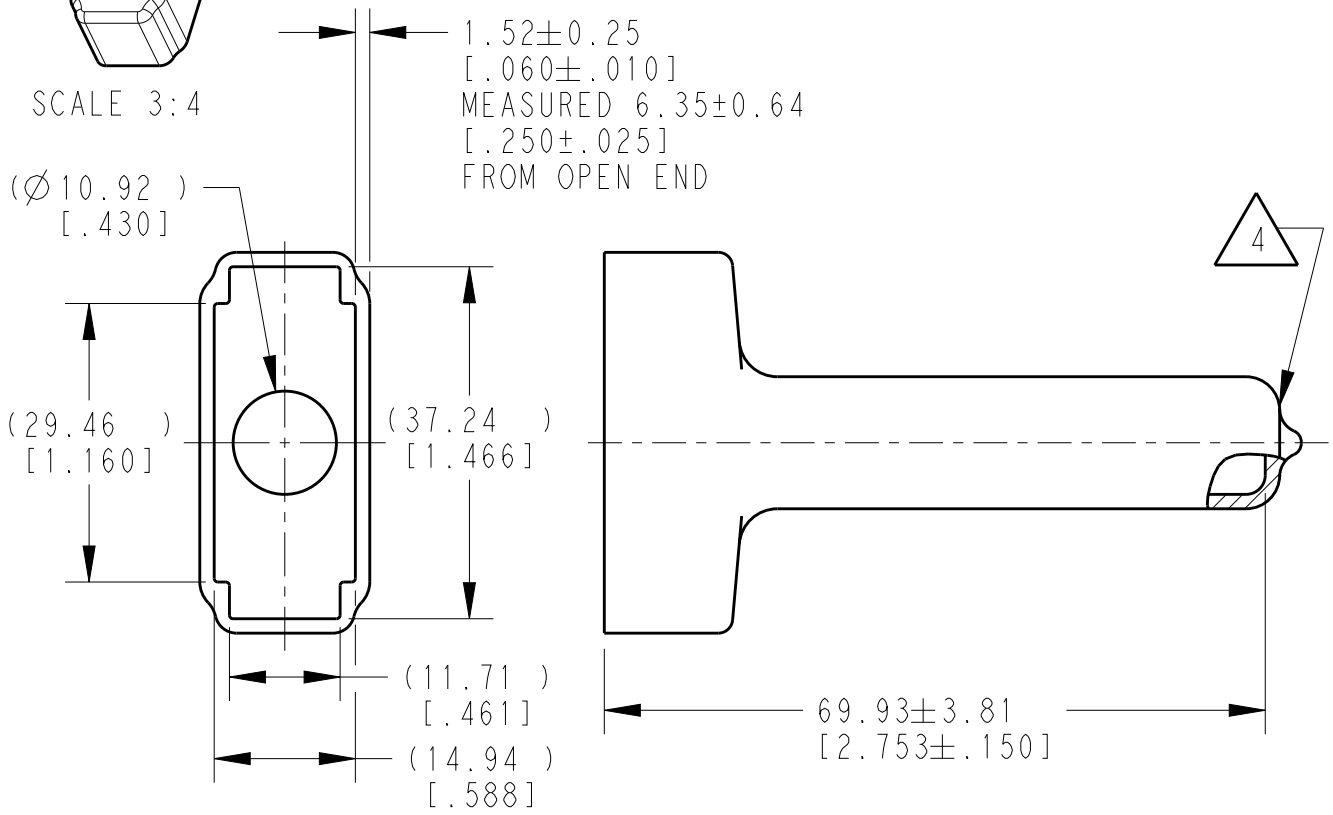

4 SMALL MATERIAL EXTENSION IS ACCEPTABLE ON THIS END ALL AROUND.

3. THIS ACCESSORY PART IS PROVIDED WITHOUT TYPICAL TRANSPORTATION INDUSTRY PROCESS CONTROL. NO VALIDATION TESTING HAS BEEN PERFORMED. CUSTOMER IS RESPONSIBLE FOR DETERMINING PRODUCT PERFORMANCE AND SUITABILITY FOR APPLICATION.

2. TEMPERATURE RATING: -29°C TO +100°C [-20°F TO +212°F]

1. THIS PART IS USED ON DTM06-12SX (X=A,B,C,D KEYS) PLUG WITH ANY MODIFICATION THAT DOES NOT INCLUDE AN END CAP.

TE INTERNAL PN	DEUTSCH PN
DTMI2S-BT	DTMI2S-BT

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2019
© COPYRIGHT 2014 TE Connectivity. All Rights Reserved. ALL RIGHTS RESERVED.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±0.63 [.025]
4 PLC	±
ANGLES	±0° 30' 0"

DWN	D.MEYER	07JUL2014
CHK	B.MILLIGAN	07JUL2014
APVD	D.MEYER	07JUL2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 6.52g

MATERIAL PVC | FINISH GRAY

TE Connectivity

NAME BOOT, PLUG, 12PIN
DTM SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A4	4AFU8	C-DTM12S-BT	-

CUSTOMER DRAWING

SCALE	SHEET	OF	REV
5:4	1	1	A2

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

RH73H2A40MKTN 3430B2F51RTDF 650075-000 MPT100C18RF SBCHE154R7K SBCHE64R7K 2005330-1 2834055-1 1743455-2 2377783-2 3-1393225-0 917696-1 TE50BR39J 141991-2 2-292161-3 2310537-1 SMW73R0JT U5254-000005-030PA 3631B101LL CPF0402B37K4E1 1-794222-0 1903112-2 936348-1 CRGCQ2010J3K3 ROX05SJ18R 1969656-1 1-962915-1 1393431-1 175977-2 2380312-2