
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-11-005033	24MAR11	RK	HMR

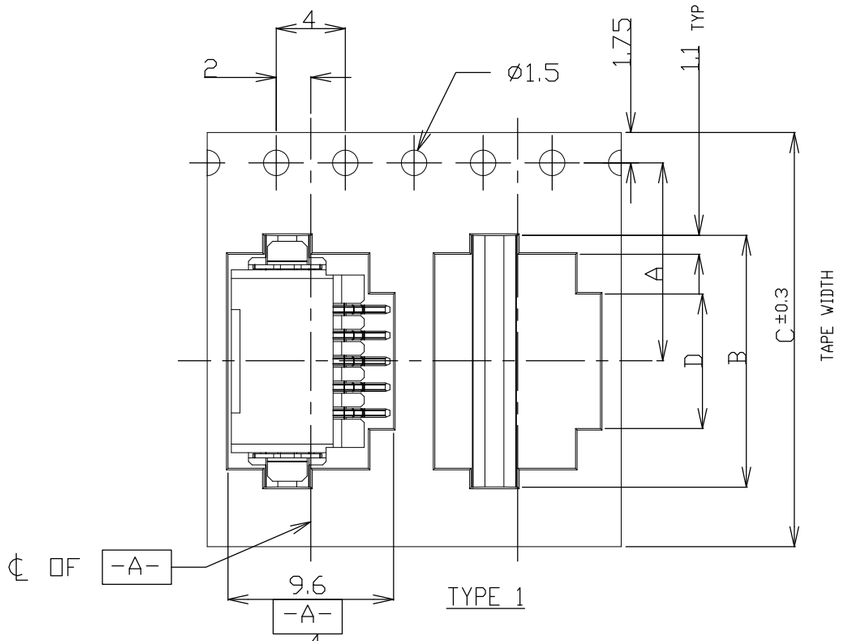



TYPE 1

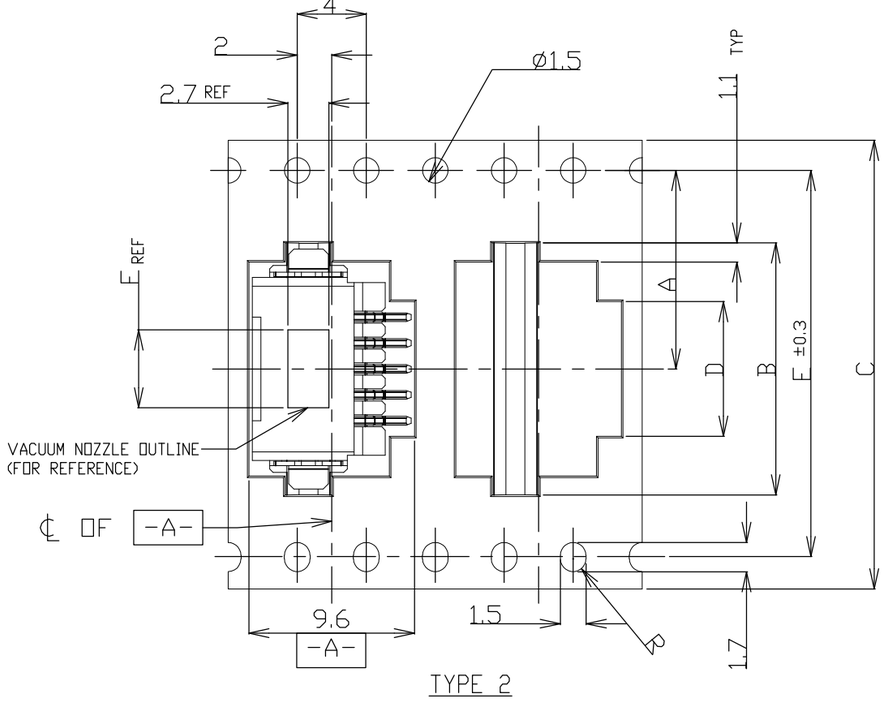



TYPE 2

NOTE:
1.PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

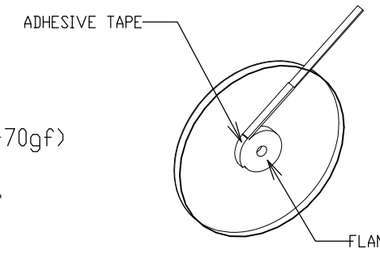


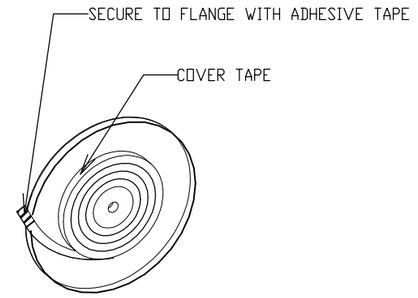

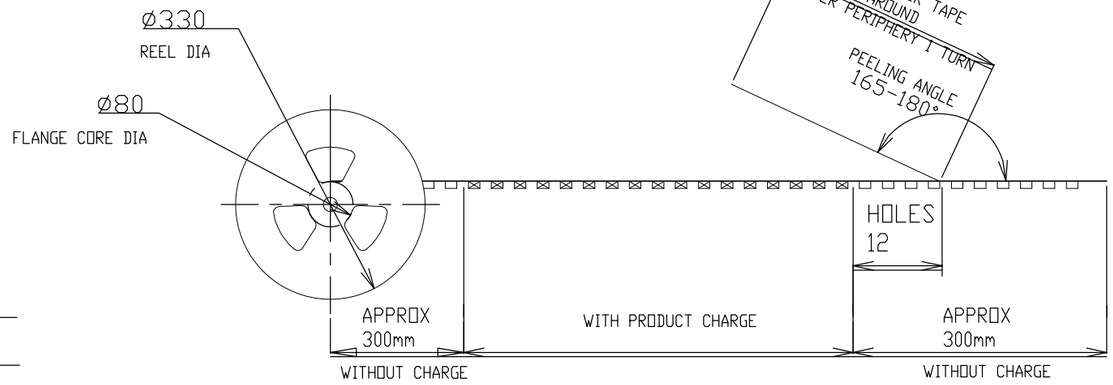



REEL WIDTH

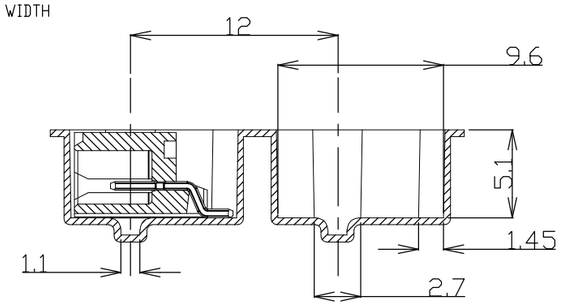

OFF TOP OF REEL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

10>, : ±0.2
30>, ✱ >10 : ±0.25
100>, ✱ >30 : ±0.3
ANGLE : ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -
FINISH -

DWN	S.XU	31JAN03
CHK	S.YAO	31JAN03
APVD	T.SASAKI	31JAN03
PRODUCT SPEC	108-60018	
APPLICATION SPEC	114-5223	
WEIGHT	-	

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292228	-

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 4 | REV C3

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

	W2	W1	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N
TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BLACK	7-292228-0
	61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		6-292228-9
	49.5	45.5	6.2	40.4	27.5	44	34.1	20.2±0.15	700	18		6-292228-8
	49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		6-292228-7
	49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		6-292228-6
	49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		6-292228-5
	49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		6-292228-4
	49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		6-292228-3
	49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		6-292228-2
	49.5	45.5	6.2	40.4	17.0	44	23.6		700	11		6-292228-1
	37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		6-292228-0
	37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		5-292228-9
	37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		5-292228-8
	37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		5-292228-7
TYPE 1	29.5	25.5	6.2	–	9.5	24	16.1	11.5	700	6		5-292228-6
	29.5	25.5	6.2	–	8.0	24	14.6	11.5	700	5		5-292228-5
	29.5	25.5	6.2	–	6.5	24	13.1	11.5	700	4		5-292228-4
	29.5	25.5	4.7	–	5.0	24	11.6	11.5	700	3		5-292228-3
	29.5	25.5	2.8	–	3.5	24	10.1	11.5	700	2		5-292228-2
TAPE TYPE	DIMENSIONS								QTY/REEL	POS	COLOR	ON TAPE P/N

OBSOLETED

	W2	W1	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N
TYPE 2	61.5	57.5	6.2	52.4	30.5	56	37.1	±0.15 26.2	700	20	BEIGE	2-292228-0
	61.5	57.5	6.2	52.4	29.0	56	35.6		700	19		1-292228-9
	49.5	45.5	6.2	40.4	27.5	44	34.1	20.2±0.15	700	18		1-292228-8
	49.5	45.5	6.2	40.4	26.0	44	32.6		700	17		1-292228-7
	49.5	45.5	6.2	40.4	24.5	44	31.1		700	16		1-292228-6
	49.5	45.5	6.2	40.4	23.0	44	29.6		700	15		1-292228-5
	49.5	45.5	6.2	40.4	21.5	44	28.1		700	14		1-292228-4
	49.5	45.5	6.2	40.4	20.0	44	26.6		700	13		1-292228-3
	49.5	45.5	6.2	40.4	18.5	44	25.1		700	12		1-292228-2
	49.5	45.5	6.2	40.4	17.0	44	23.6		700	11		1-292228-1
	37.5	33.5	6.2	28.4	15.5	32	22.1	14.2	700	10		1-292228-0
	37.5	33.5	6.2	28.4	14.0	32	20.6	14.2	700	9		292228-9
	37.5	33.5	6.2	28.4	12.5	32	19.1	14.2	700	8		292228-8
	37.5	33.5	6.2	28.4	11.0	32	17.6	14.2	700	7		292228-7
TYPE 1	29.5	25.5	6.2	–	9.5	24	16.1	11.5	700	6		292228-6
	29.5	25.5	6.2	–	8.0	24	14.6	11.5	700	5		292228-5
	29.5	25.5	6.2	–	6.5	24	13.1	11.5	700	4		292228-4
	29.5	25.5	4.7	–	5.0	24	11.6	11.5	700	3		292228-3
	29.5	25.5	2.8	–	3.5	24	10.1	11.5	700	2		292228-2
TAPE TYPE	DIMENSIONS								QTY/REEL	POS	COLOR	ON TAPE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN S.XU	31JAN03
CHK S.YAO	31JAN03
APVD T.SASAKI	31JAN03
PRODUCT SPEC	108-60018
APPLICATION SPEC	114-5223
WEIGHT	–
CUSTOMER DRAWING	

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292228	—


SCALE	SHEET	REV
NTS	2 OF 4	C3


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
ES	00


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	—	—

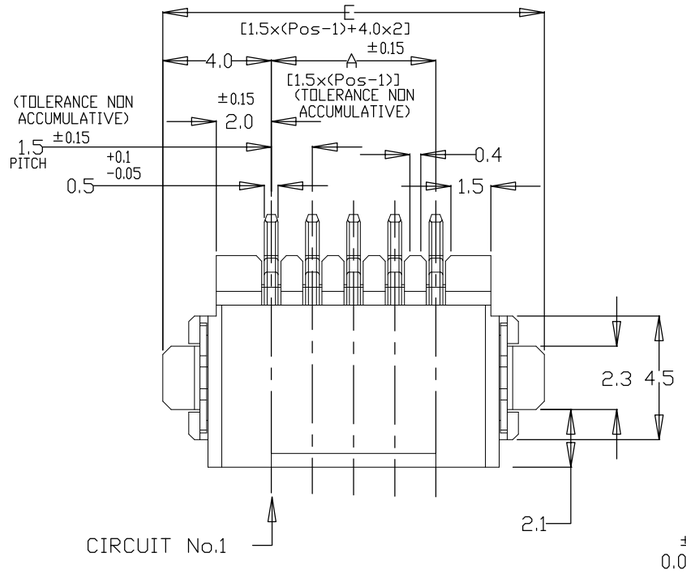


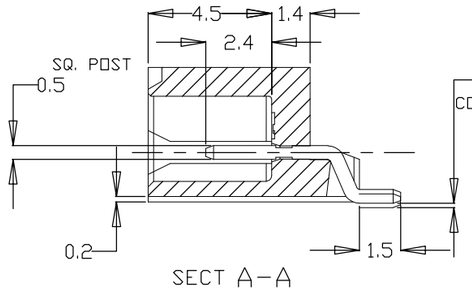


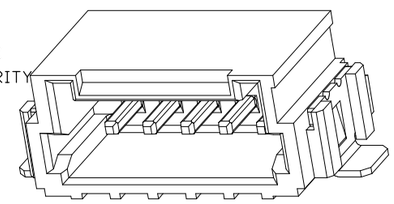


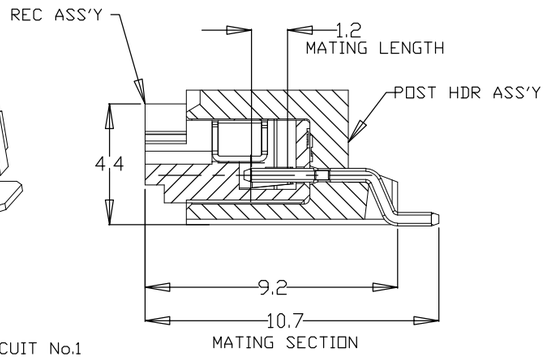






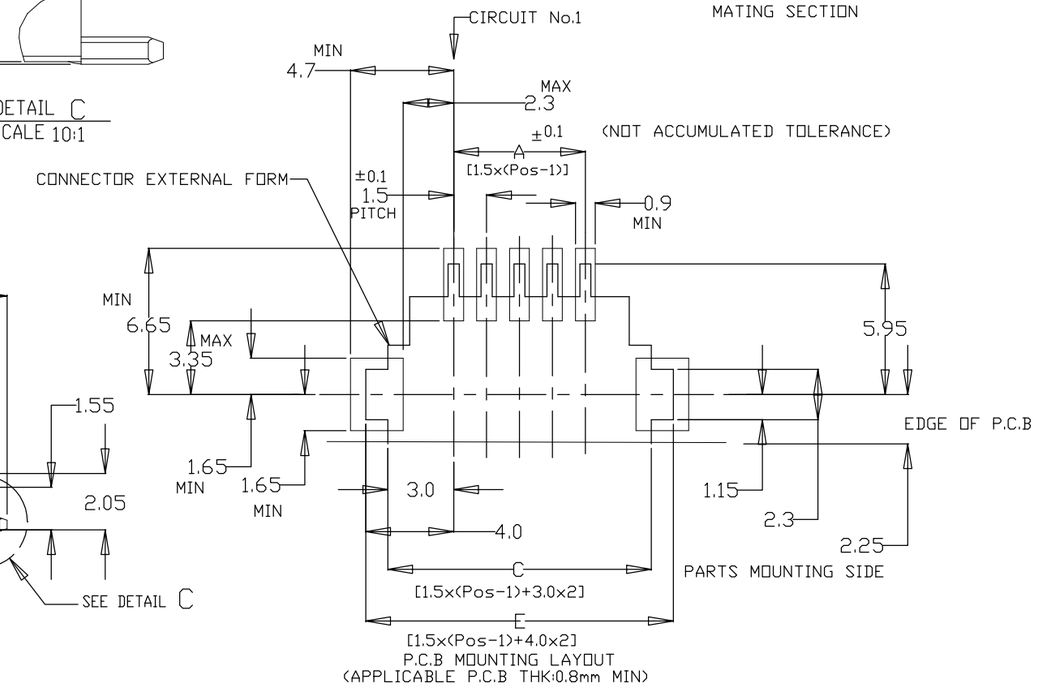

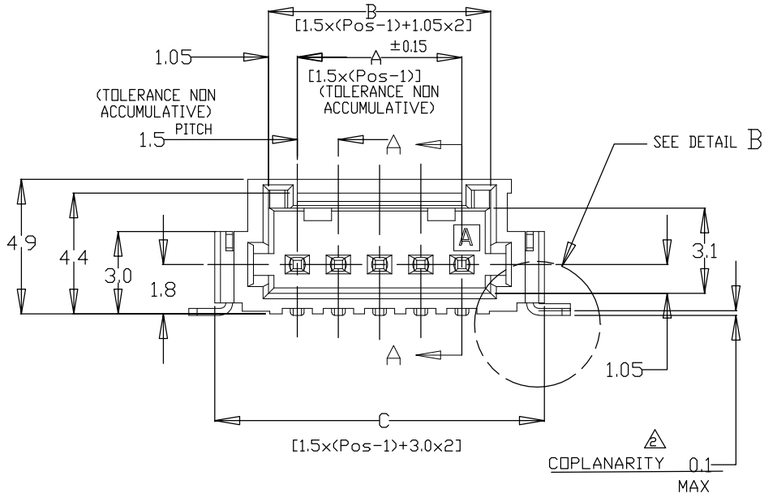

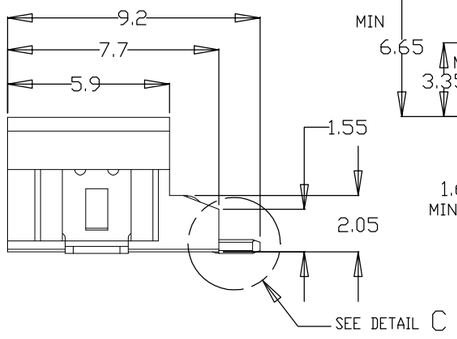

NOTES:
1. MATERIAL:
   HOUSING:6T NYLON(HIGH HEAT-RESISTED NYLON)G.F.30%
   UL94V-0, COLOR: BEIGE OR BLACK
   POST:TIN BRASS WIRE
2. TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE, FLOAT OF SOLDER TINE AND SOLDER PEG 0.1mm MAX.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN	S.XU	31JAN03
CHK	S.YAO	31JAN03
APVD	T.SASAKI	31JAN03
PRODUCT SPEC	108-60018	
APPLICATION SPEC	114-5223	
WEIGHT	–	

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292228	—

CUSTOMER DRAWING | SCALE NTS | SHEET 3 OF 4 | REV C3

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
ES	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

WEIGHT (g)	DIMENSIONS E	C	B	A	Pos.	P/N BLACK	BEIGE (NAT)
1.078	36.5	34.5	30.6	28.5	20	7-292228-0	2-292228-0
1.033	35.0	33.0	29.1	27.0	19	6-292228-9	1-292228-9
0.988	33.5	31.5	27.6	25.5	18	6-292228-8	1-292228-8
0.942	32.0	30.0	26.1	24.0	17	6-292228-7	1-292228-7
0.896	30.5	28.5	24.6	22.5	16	6-292228-6	1-292228-6
0.850	29.0	27.0	23.1	21.0	15	6-292228-5	1-292228-5
0.804	27.5	25.5	21.6	19.5	14	6-292228-4	1-292228-4
0.759	26.0	24.0	20.1	18.0	13	6-292228-3	1-292228-3
0.713	24.5	22.5	18.6	16.5	12	6-292228-2	1-292228-2
0.667	23.0	21.0	17.1	15.0	11	6-292228-1	1-292228-1
0.621	21.5	19.5	15.6	13.5	10	6-292228-0	1-292228-0
0.576	20.0	18.0	14.1	12.0	9	5-292228-9	292228-9
0.530	18.5	16.5	12.6	10.5	8	5-292228-8	292228-8
0.484	17.0	15.0	11.1	9.0	7	5-292228-7	292228-7
0.438	15.5	13.5	9.6	7.5	6	5-292228-6	292228-6
0.392	14.0	12.0	8.1	6.0	5	5-292228-5	292228-5
0.347	12.5	10.5	6.6	4.5	4	5-292228-4	292228-4
0.301	11.0	9.0	5.1	3.0	3	5-292228-3	292228-3
0.255	9.5	7.5	3.6	1.5	2	5-292228-2	292228-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

DWN S.XU 31JAN03
CHK S.YAO 31JAN03
APVD T.SASAKI 31JAN03
PRODUCT SPEC 108-60018
APPLICATION SPEC 114-5223
WEIGHT –

CUSTOMER DRAWING

TE Connectivity

NAME
AMP Mini CT Connector 1.5mm PITCH
SINGLE ROW POST HDR ASS'Y (H)
SMT TYPE WITHOUT BOSS, EMBOSS TAPE PACKAGED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-292228	–

SCALE	SHEET	REV
NTS	4 OF 4	C3

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-962915-1 2310537-1 2834055-1 2005330-1 917696-1 U5254-000005-030PA 141991-2 2377783-2 RH73H2A40MKTN ROX05SJ18R 1969656-1 2-292161-3 SBCHE154R7K TE50BR39J 1-794222-0 1393431-1 1743455-2 2380312-2 3-1393225-0 3430B2F51RTDF 3631B101LL 650075-000 1903112-2 936348-1 SMW73R0JT CPF0402B37K4E1 CRGCQ2010J3K3 MPT100C18RF SBCHE64R7K 175977-2