
TE Connectivity: Every Connection Counts
© 2017 TE Connectivity Ltd. family of companies. All Rights Reserved

HARNESSING

HEAT SHRINK BOOTS

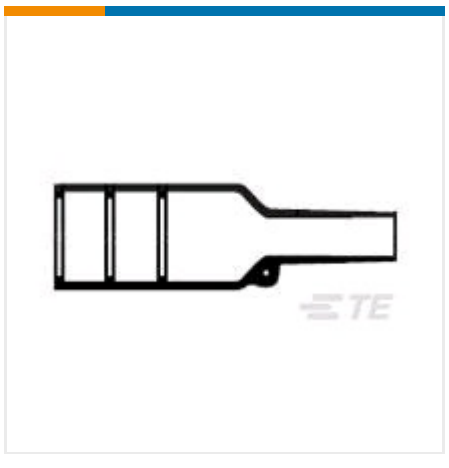

✔ Active

**TE CONNECTIVITY (TE)**

# 202K121-100-01-0

Raychem | CAP

202K121-100-01-0
TE Internal Number: 791971-000
Alias ID: 5-1196133-9

EU RoHS Compliant
EU ELV Compliant

**Lipped** Yes

**Operating Temperature Range (°C)** -30 – 105

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids

**Adhesive Options** S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)

**Material Systems Code** 100

**PRODUCT DRAWING**
English

## DOCUMENTATION

### Product Drawings

**Customer Drawing**
PDF
**English**

### Product Specifications

Product Specification

**Thermofit Zero Hal Polyolefin Molded Components Halogen-Free, Flame Retarded, Semi-Flexible, Heat-Shrinkable**
PDF
**English**

### Product Environmental Compliance

Downloaded from Arrow.com.

Safety Data Sheet

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Danish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Dutch**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**French**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**German**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Italian**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Norwegian**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Spanish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**Swedish**

**Flame-Retardant Zero-Halogen Heat-Shrinkable Polymeric Products**

PDF

**English**

## FEATURES

Please review product documents or contact us for the latest agency approval information.

Please Note: Use the Product Drawing for all design activity.

Product Type Features

**Molded Part Type** Molded Boot

Configuration Features

Downloaded from Arrow.com.

**Lipped** Yes

Body Features

**Material Systems Code** 100
**Adhesive Pre-Coat** No
**Entry Size (Braided or Magneform Adapter)** 4, 5, 6
**Entry Size (Spin Coupling Adapter)** 4 – 5
**Entry Size (Tinel-Lock Adapter)** 4, 5

Dimensions

**Cable Diameter Range** 5.6 – 13 mm [ .22 – .512 in ]
**Wire/Cable Outside Diameter** .236 in, .276 in, .3 in, .31 in, .35 in, 6 mm, 7 mm, 8 mm, 9 mm

Usage Conditions

**Operating Temperature Range (°C)** -30 – 105
**Flammability** Low Fire Hazard

Operation/Application

**Power Cable Accessory** No

Industry Standards

**Government Qualified** No
**Approved Standards** BR1326 listed Class G, BS-G-198-5-DF, DEF Std 59-97 Issue 3 Type DF, IEC 62329-3-101, VG95343 Part 28

Other

**Fluid/Chemical Resistance** Suitable for occasional exposure to fluids
**Adhesive Options** S1030 Separate Adhesive, -80°C – 80°C (-112°F – 176°F), S1048 Separate Adhesive, -55°C – 105°C (-67°F – 221°F), S1125 Separate Adhesive, -75°C – 150°C (-103°F – 302°F)
**Adhesive Type** Adhesive Purchased Separately

## PRODUCT COMPLIANCE

Statement of Compliance

**Statement of Compliance**
PDF

Downloaded from Arrow.com.