



RoHS

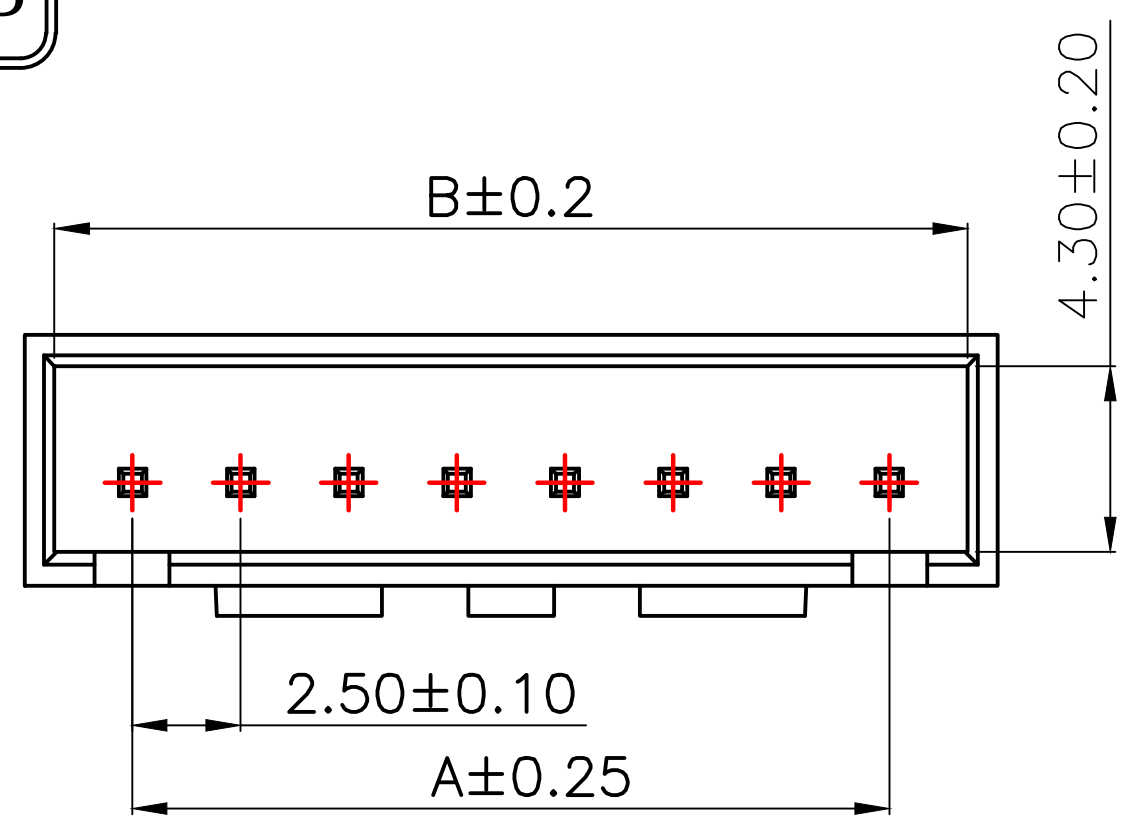


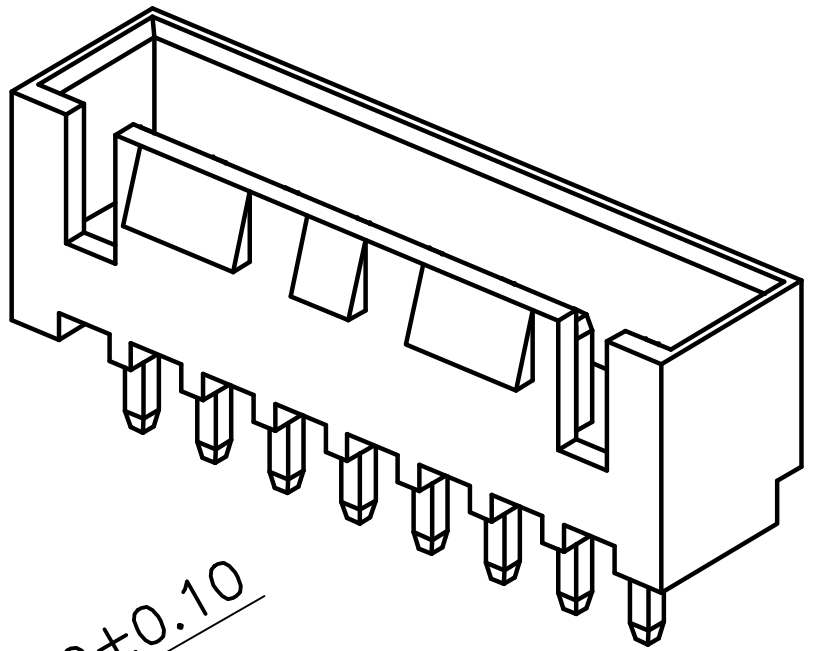

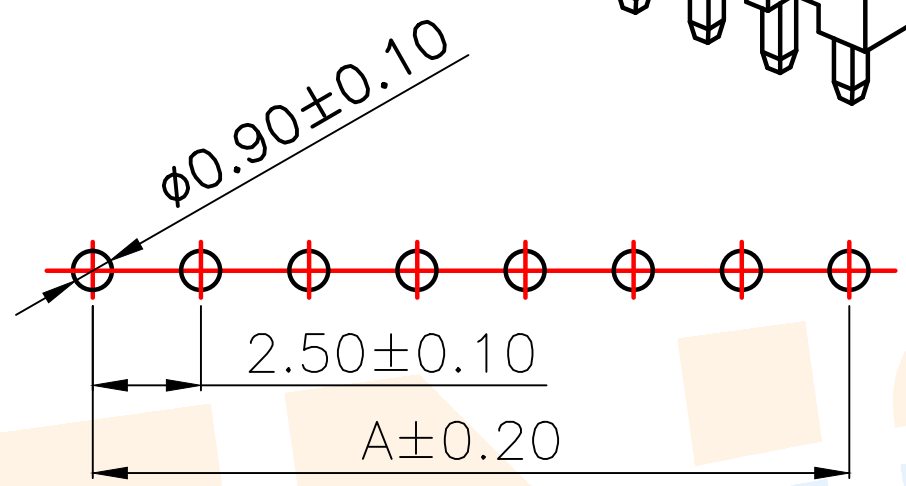

适用线路板(PCB LAYOUT)

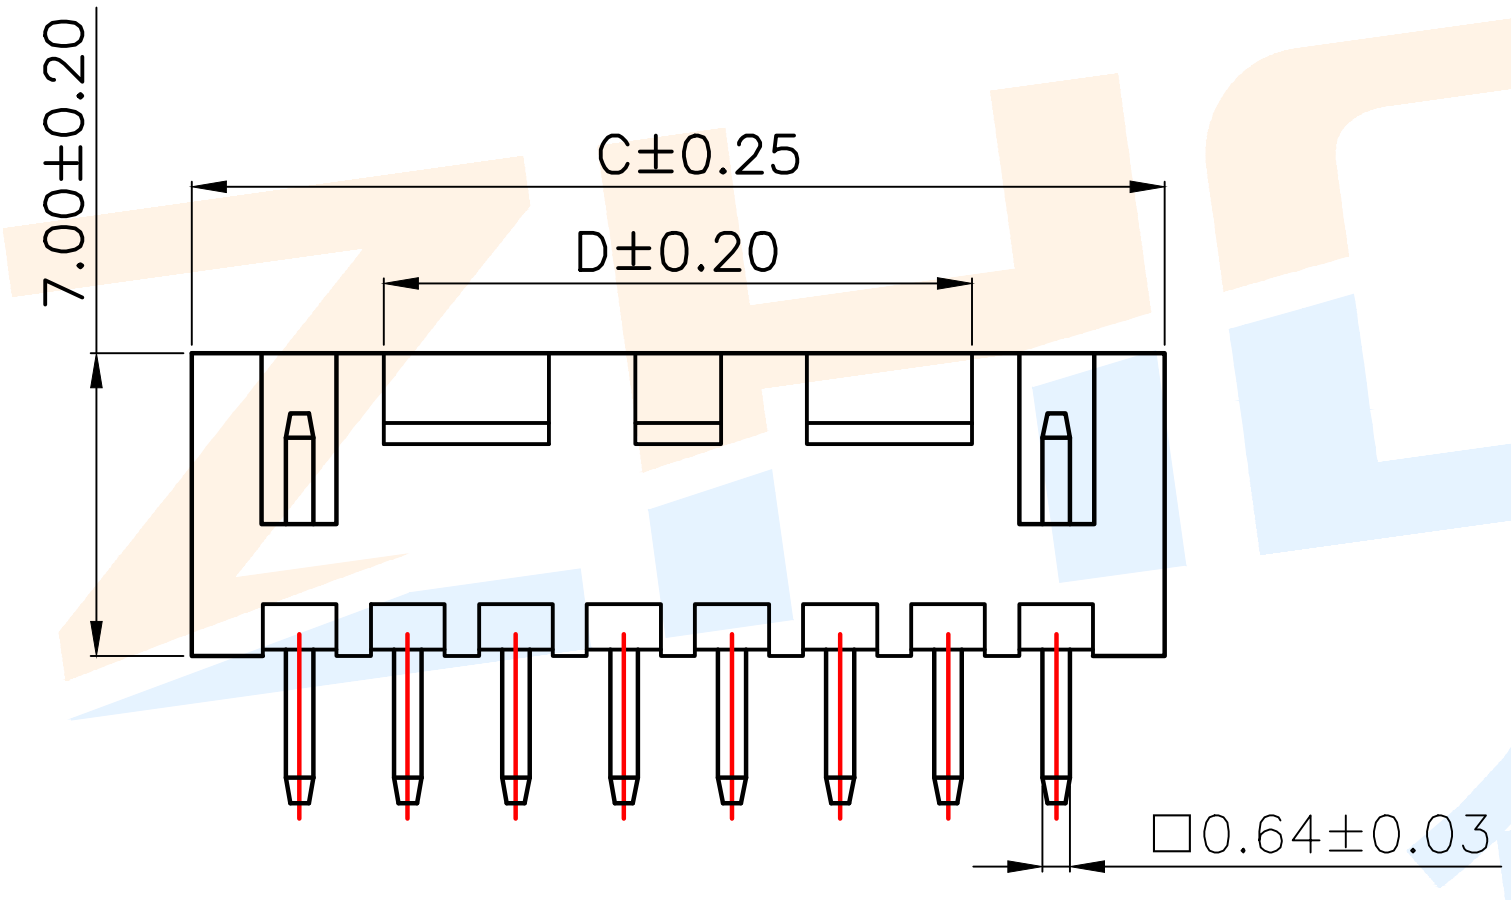


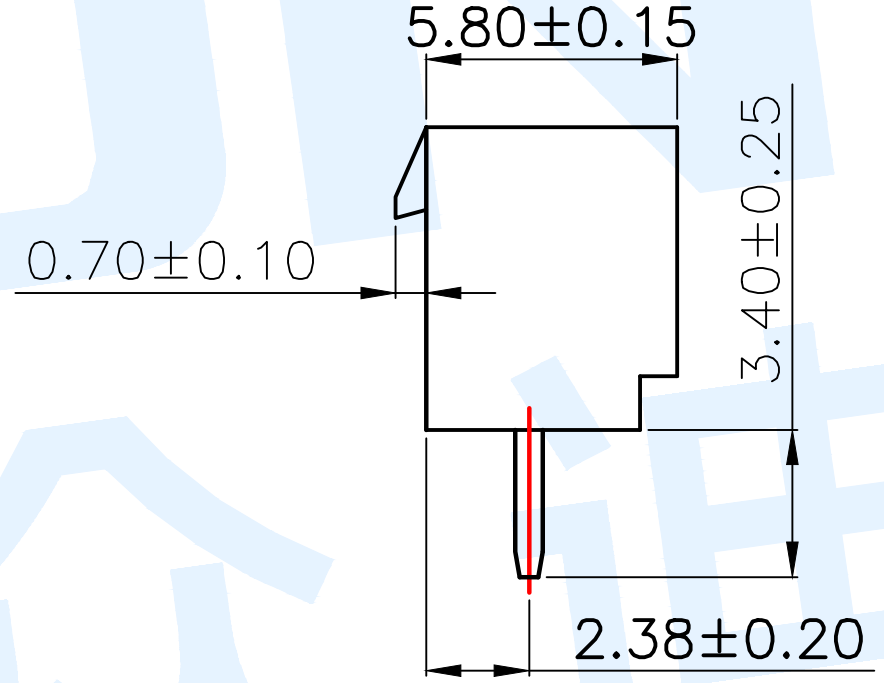


Model No.	Pin	A	B	C	D
WAFER-XHB2.54-2PZZ-W	2	2.50	6.10	7.50	3.10
WAFER-XHB2.54-3PZZ-W	3	5.00	8.60	10.00	3.10
WAFER-XHB2.54-4PZZ-W	4	7.50	11.10	12.50	3.60
WAFER-XHB2.54-5PZZ-W	5	10.00	13.60	15.00	6.10
WAFER-XHB2.54-6PZZ-W	6	12.50	16.10	17.50	8.60
WAFER-XHB2.54-7PZZ-W	7	15.00	18.60	20.00	11.10
WAFER-XHB2.54-8PZZ-W	8	17.50	21.10	22.50	13.60
WAFER-XHB2.54-9PZZ-W	9	20.00	23.60	25.00	16.10
WAFER-XHB2.54-10PZZ-W	10	22.50	26.10	27.50	18.60
WAFER-XHB2.54-11PZZ-W	11	25.00	28.60	30.00	21.10
WAFER-XHB2.54-12PZZ-W	12	27.50	31.10	32.50	23.60
WAFER-XHB2.54-13PZZ-W	13	30.00	33.60	35.00	26.10
WAFER-XHB2.54-14PZZ-W	14	32.50	36.10	37.50	28.60
WAFER-XHB2.54-15PZZ-W	15	35.00	38.60	40.00	31.10
WAFER-XHB2.54-16PZZ-W	16	37.50	41.10	42.50	33.60
WAFER-XHB2.54-17PZZ-W	17	40.00	43.60	45.00	36.10
WAFER-XHB2.54-18PZZ-W	18	42.50	46.10	47.50	38.60
WAFER-XHB2.54-19PZZ-W	19	45.00	48.60	50.00	41.10
WAFER-XHB2.54-20PZZ-W	20	47.50	51.10	52.50	43.60

Specifications/技术规格:

1.Poles/线数：2～20P
2.Wire range/适用线规：AGW 28#～22#
3.Applicable PC board thickness/适用PC板厚度：1.6mm
4.Current rating/额定电流：3.0A
5.Voltage rating/额定电压：250V DC/AC
6.Insulation Resistance/绝缘电阻：1000MΩ Min
7.Dielectric Withstanding/ 耐电压：1000V AC/minute
8.Contact Resistance/ 接触电阻：30mΩ Max
9.Operating Temperature/ 工作温度：-25℃ to +85℃

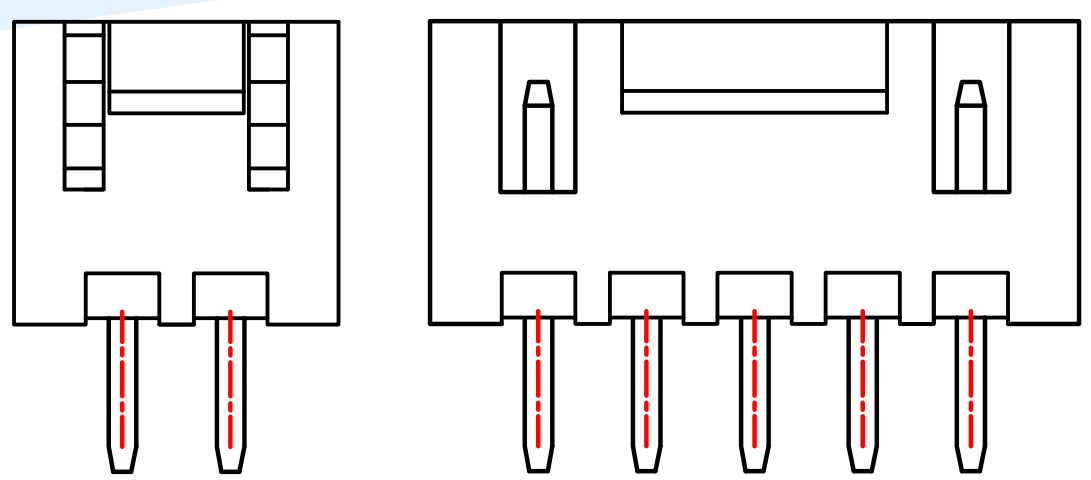
2P～5P（外观随孔位递进自然变化）

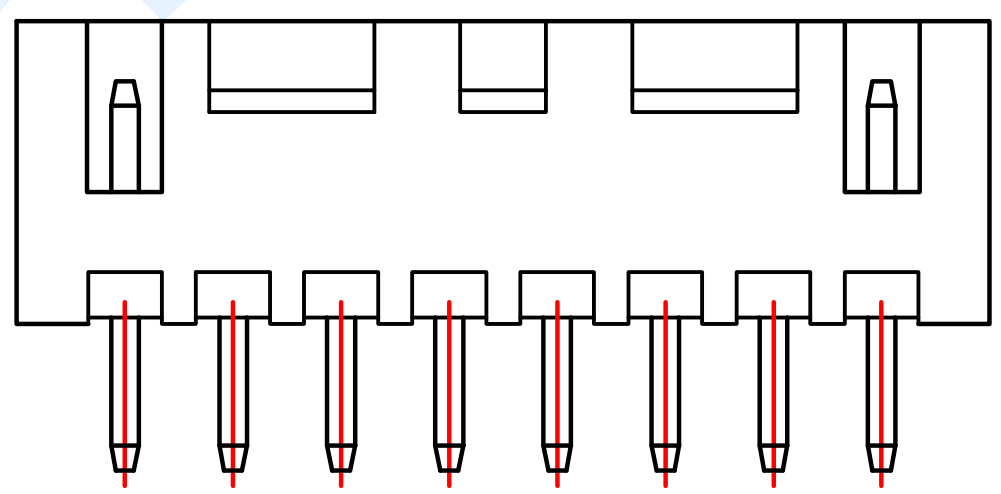
6P～20P（外观随孔位递进自然变化）

NO.	Name	Number	Qty	Materil	Remarks
Ⓑ	Terminal			Brass	Plating Sn
Ⓐ	Housing		1	PA66	White

ZHONGDI® 众迪 Zhongdi Electronic Technology Co., Ltd

Tolerance not specified	angle	±2°	design	date
	10~30	±0.30	Review	date
	5~10	±0.20	Approved	date
	~ 5	±0.10	Drawing number:	

modify | Review | Approved

name: WAFER CONNECTOR

model: WAFER-XHB2.54-□□PZZ-W

Proportion 1:1 | unit mm | gape number | A4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

ZHONGDI:

WAFER-HY2.0-6PWT-W1-P WAFER-SH1.0-8PWT-W1-P WAFER-TJC8-2.54-2PWZ
WAFER-ZH1.5-12PWT-W1-P WAFER-ZH1.5-4PLT-W1-P WAFER-MX1.25-4PWZ-C22-9T
WAFER-SH1.0-6PWT-W1-P WAFER-SUR0.8-14PWT-W1-P WAFER-SUR0.8-4PLT-W1-P
WAFER-TJC8-2.54-12PZZ WAFER-ZH1.5-2PWT-W1-P WAFER-HY2.0-10PWT-W1-P
WAFER-MX1.25-2PWZ-C22-9T WAFER-PH2.0-2PWT-W1-P WAFER-VH3.96-5PWT-W1-P
WAFER-MX1.25-5PLT-W1-P WAFER-MX1.25-5PZZ-C22-9T WAFER-HY2.0-4PWT-W1-P
WAFER-HY2.0-6PLT-W1-P WAFER-XHB2.54-7PWT-W1-P WAFER-ZH1.5-2PLT-W1-P
WAFER-HY2.0-7PWT-W1-P WAFER-SHB1.0-8PWT-W1-P WAFER-SUR0.8-12PWT-W1-P
WAFER-GH1.25-12PLT-W1-P WAFER-SH1.0-11PLT-W1-P WAFER-VH3.96-3PWT-W1-P
WAFER-GH1.25-14PWT-W1-P WAFER-SHB1.0-13PLT-W1-P WAFER-XH2.54-12PWT-W1-P