N&P-Channel complementary Power MOSFET

Features

- N-Channel: 60V, 35A

  $R_{DS(ON)}$ <30mΩ @ V_{GS} = 10V

  $R_{DS(ON)}$ <33mΩ @ V_{GS} = 4.5V

- P-Channel: -60V, -19A

  $R_{DS(ON)}$ < 50mΩ @ V_{GS} = -10V

  $R_{DS(ON)}$ < 60mΩ @ V_{GS} = -4.5V

General Features

- Advanced Trench Technology
- Provide Excellent RDS(ON) and Low Gate Charge
- Lead Free and Green Available

100% UIS TESTED!
100% ΔVds TESTED!

RoHS



Dual TO-252-4L

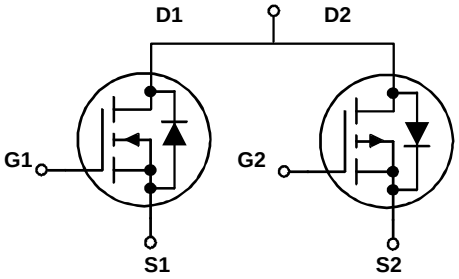

N-Channel P-Channel

ABSOLUTE MAXIMUM RATINGS (TA = 25°C UNLESS OTHERWISE NOTED)					
Parameter		**Symbol**	**Nch Limit**	**Pch Limit**	**Units**
Drain-Source Voltage		V_{DS}	60	-60	V
Gate-Source Voltage		V_{GS}	±20	±20	
Continuous Drain Current [a]	T_C=25°C	I_D	35	-20	A
Pulsed Drain Current [b]		I_{DM}	140	-80	
Continuous Source Current (Diode Conduction) [a]	T_C=25°C	I_S	35	-20	A
Power Dissipation [a]	T_C=25°C	P_D	50	50	W
Operating Junction and Storage Temperature Range		T_J, T_{stg}	T_J, T_{stg}	-55 to 175	°C

THERMAL RESISTANCE RATINGS			
Parameter	**Symbol**	**Maximum**	**Units**
Maximum Junction-to-Ambient [c]	$R_{\theta JA}$	50	°C/W
Maximum Junction-to-Case	$R_{\theta JC}$	3	

Notes

a. Package Limited

b. Pulse width limited by maximum junction temperature

c. Surface Mounted on 1” x 1” FR4 Board.

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static						
Gate-Source Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250 uA	1		3	V
		V_{DS} = V_{GS}, I_D = -250 uA	-1		-3	V
Gate-Body Leakage	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 60 V, V_{GS} = 0 V			1	uA
		V_{DS} = -48 V, V_{GS} = 0 V			-1	
On-State Drain Current [a]	$I_{D(on)}$	V_{DS} = 5 V, V_{GS} = 10 V	45			A
		V_{DS} = -5 V, V_{GS} = -10 V	-25			A
Drain-Source On-Resistance [a]	$r_{DS(on)}$	V_{GS} = 10 V, I_D = 20 A		30		mΩ
		V_{GS} = 4.5 V, I_D = 16 A		33		
		V_{GS} = -10 V, I_D = -10 A		50		mΩ
		V_{GS} = -4.5 V, I_D = -8 A		60		
Forward Transconductance [a]	g_{fs}	V_{DS} = 15 V, I_D = 20 A		15		S
		V_{DS} = -15 V, I_D = -10 A		11		S
Diode Forward Voltage [a]	V_{SD}	I_S = 17 A, V_{GS} = 0 V		0.89		V
		I_S = -10 A, V_{GS} = 0 V		-0.98		V
Dynamic [b]						
Total Gate Charge	Q_g	N - Channel V_{DS} = 30 V, V_{GS} = 4.5 V, I_D = 20 A		9		nC
Gate-Source Charge	Q_{gs}			3		
Gate-Drain Charge	Q_{gd}			4		
Turn-On Delay Time	$t_{d(on)}$	N - Channel V_{DS} = 30 V, R_L = 1.5 Ω, I_D = 20 A, V_{GEN} = 10 V, R_{GEN} = 6 Ω		5		ns
Rise Time	t_r			5		
Turn-Off Delay Time	$t_{d(off)}$			27		
Fall Time	t_f			8		
Input Capacitance	C_{iss}	N - Channel V_{DS} = 15 V, V_{GS} = 0 V, f = 1 Mhz		1500		pF
Output Capacitance	C_{oss}			84		
Reverse Transfer Capacitance	C_{rss}			79		
Total Gate Charge	Q_g	P - Channel V_{DS} = -30 V, V_{GS} = 4.5 V, I_D = -10 A		10		nC
Gate-Source Charge	Q_{gs}			5		
Gate-Drain Charge	Q_{gd}			4		
Turn-On Delay Time	$t_{d(on)}$	P - Channel V_{DS} = -30 V, R_L = 3 Ω, I_D = -10 A, V_{GEN} = -10 V, R_{GEN} = 6 Ω		5		ns
Rise Time	t_r			4		
Turn-Off Delay Time	$t_{d(off)}$			30		
Fall Time	t_f			11		
Input Capacitance	C_{iss}	P - Channel V_{DS} = -15 V, V_{GS} = 0 V, f = 1 Mhz		1180		pF
Output Capacitance	C_{oss}			84		
Reverse Transfer Capacitance	C_{rss}			60		

N-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

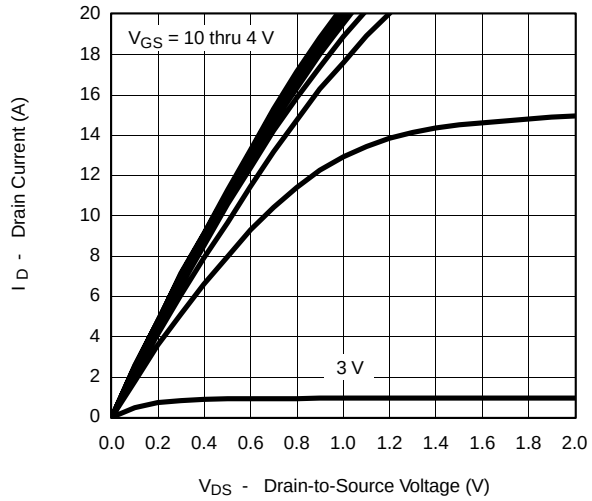

Output Characteristics

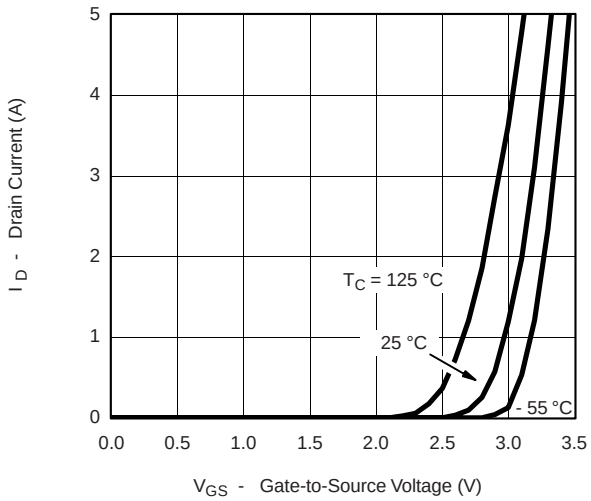

Transfer Characteristics

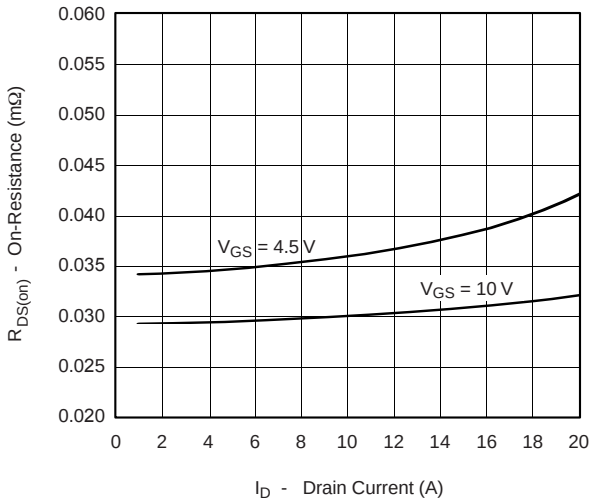

On-Resistance vs. Drain Current and Gate Voltage

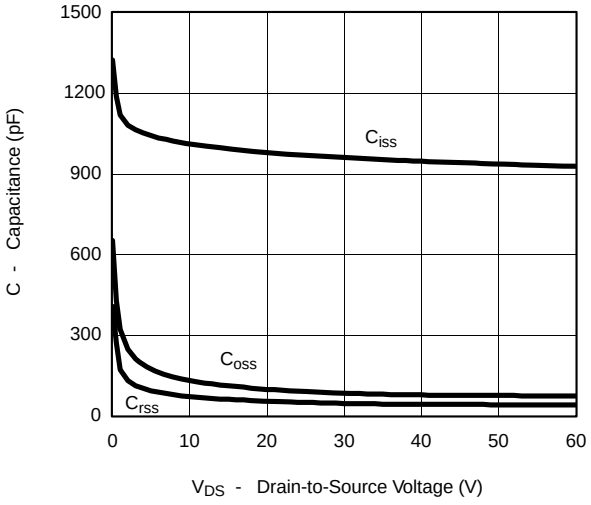

Capacitance

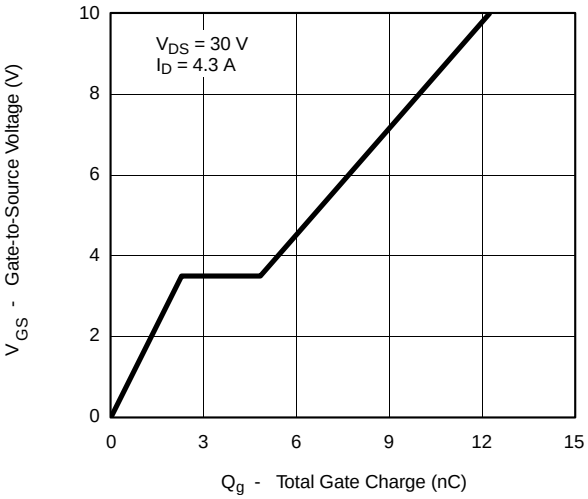

Gate Charge

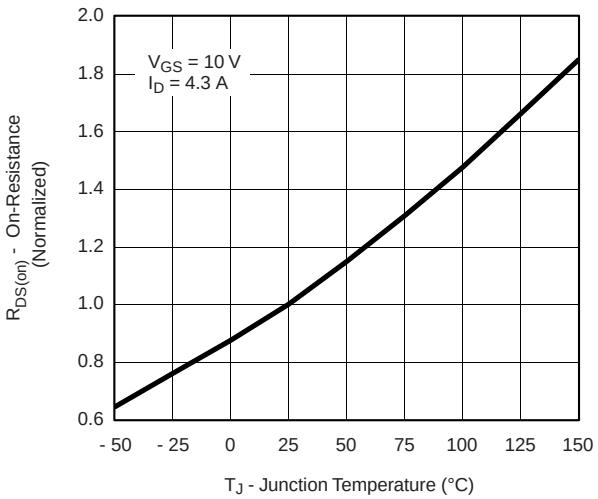

On-Resistance vs. Junction Temperature

N-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

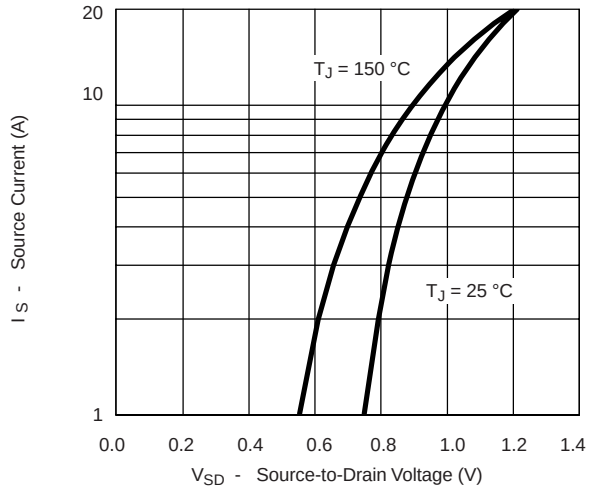

Source-Drain Diode Forward Voltage

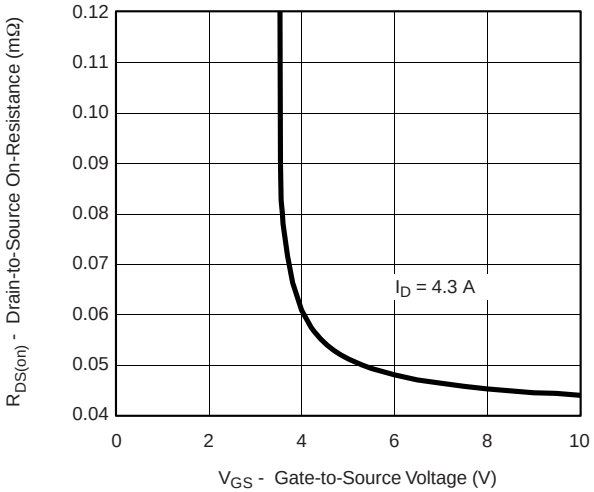

On-Resistance vs. Gate-to-Source Voltage

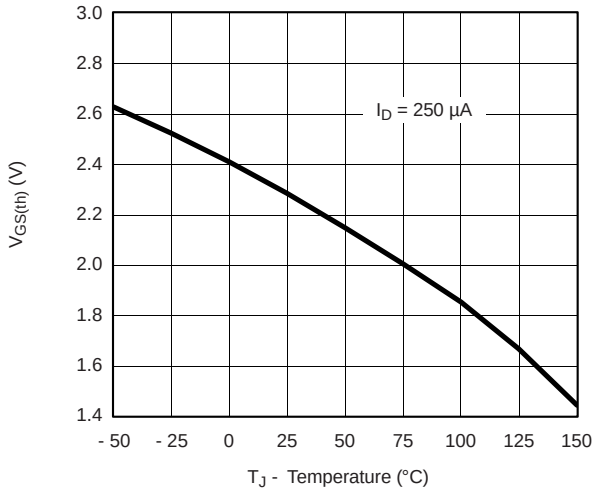

Threshold Voltage

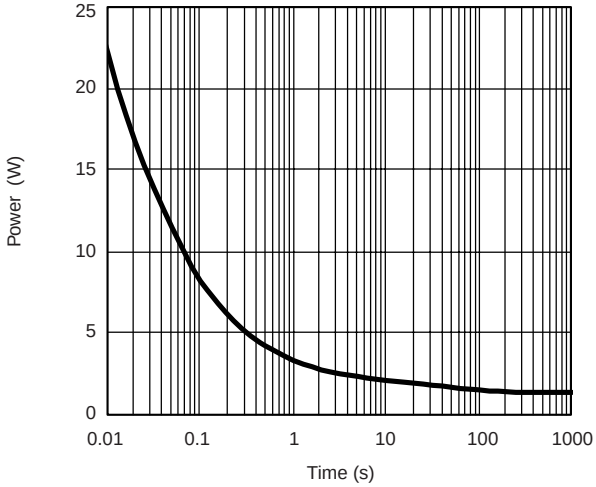

Single Pulse Power, Junction-to-Ambient

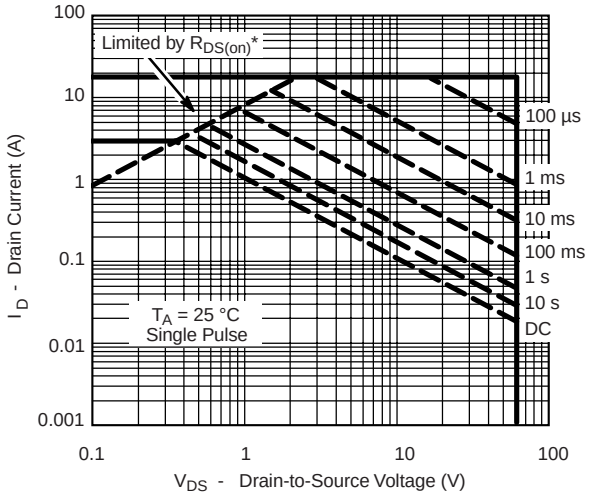

* V_{GS} > minimum V_{GS} at which $R_{DS(on)}$ is specified

Safe Operating Area

N-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

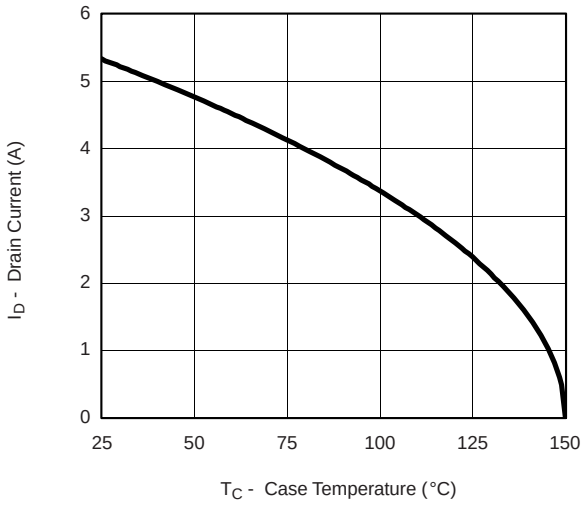

Current Derating*

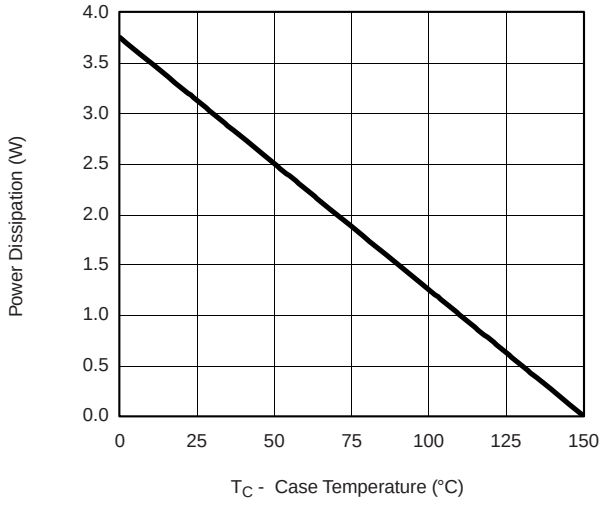

Power Derating

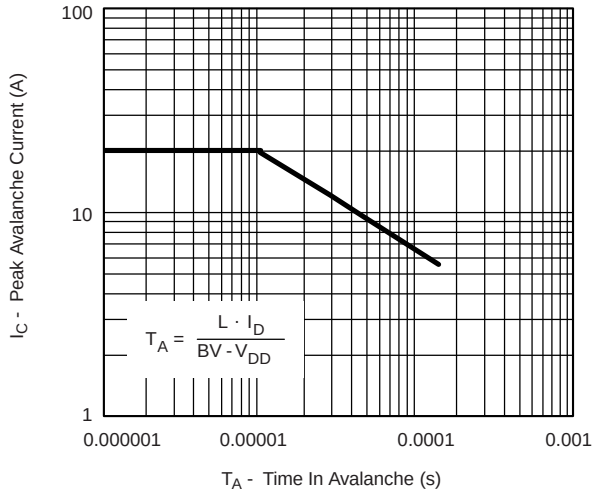

Single Pulse Avalanche Capability

* The power dissipation P_D is based on $T_{J(max)}$ = 150 °C, using junction-to-case thermal resistance, and is more useful in settling the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

N-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

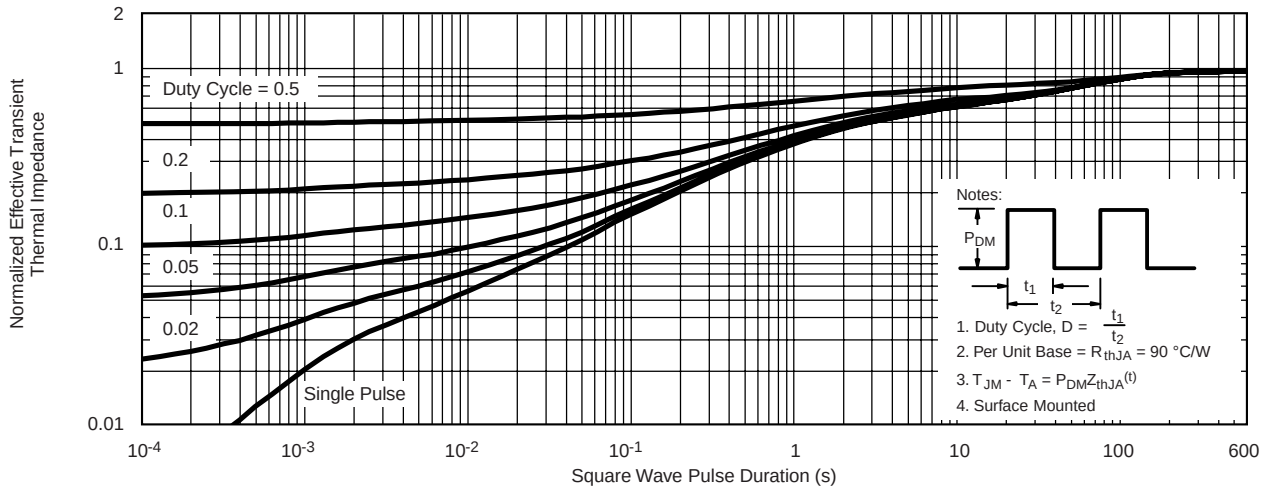

Normalized Thermal Transient Impedance, Junction-to-Ambient

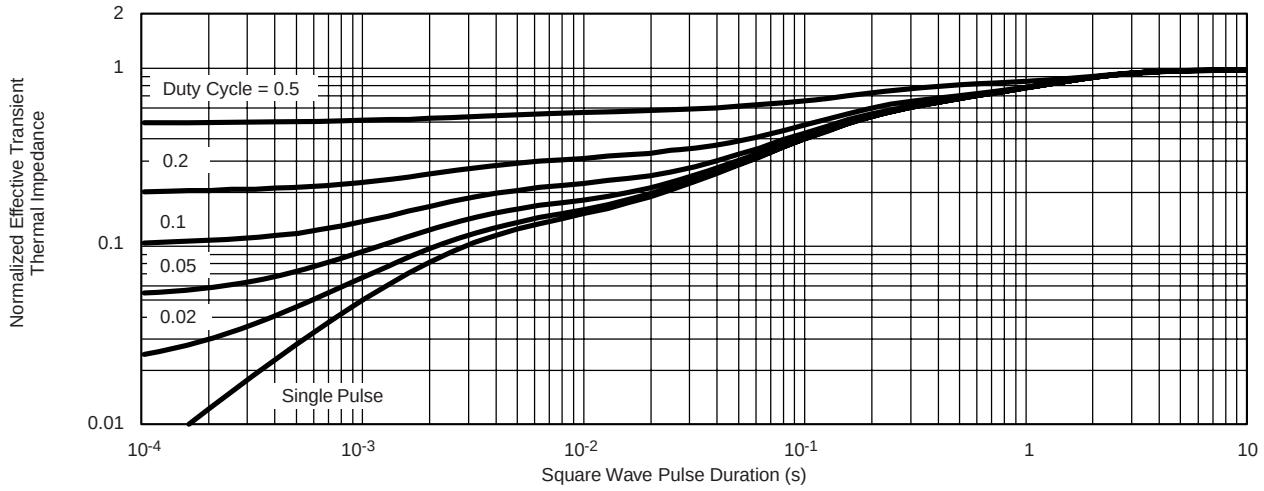

Normalized Thermal Transient Impedance, Junction-to-Case

P-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

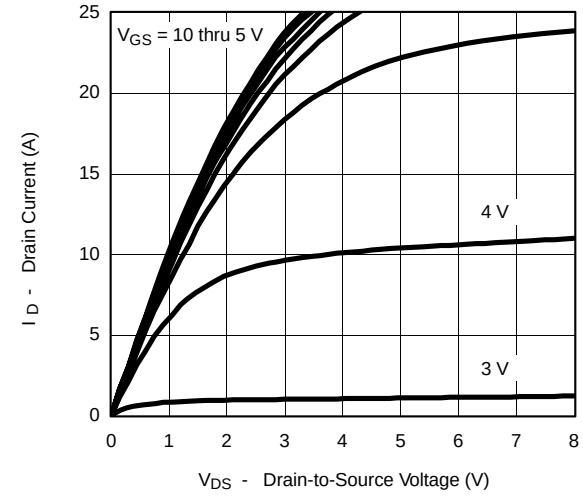

Output Characteristics

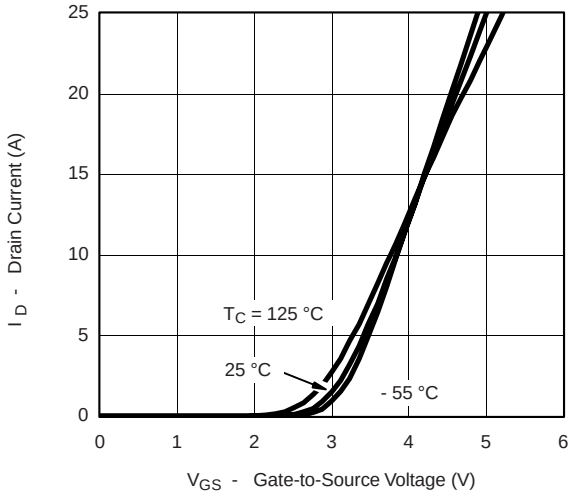

Transfer Characteristics

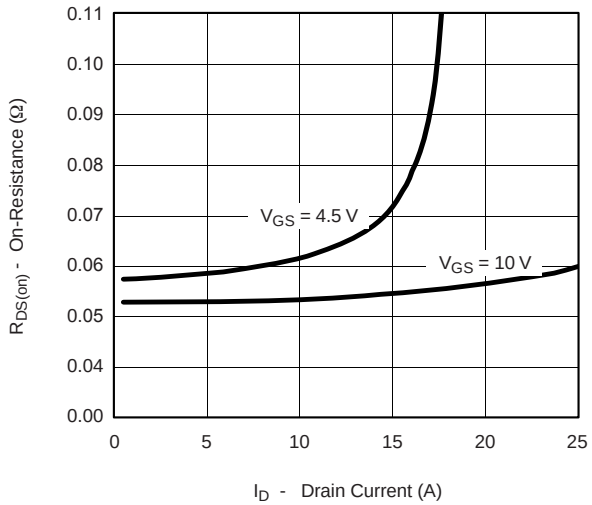

On-Resistance vs. Drain Current

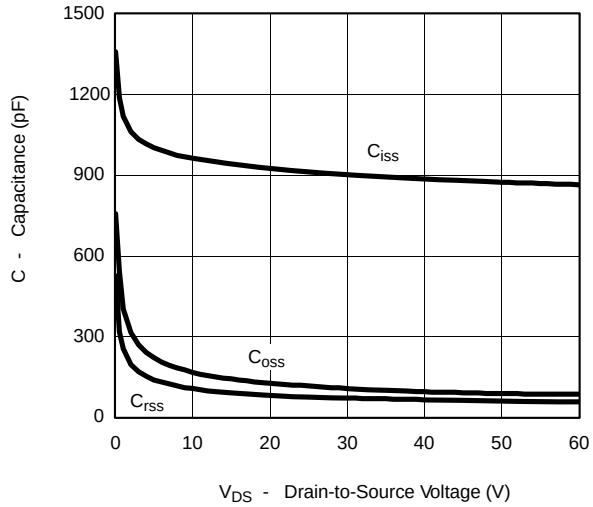

Capacitance

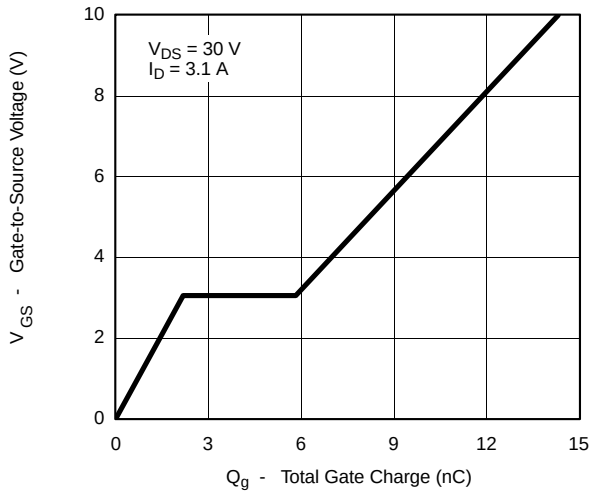

Gate Charge

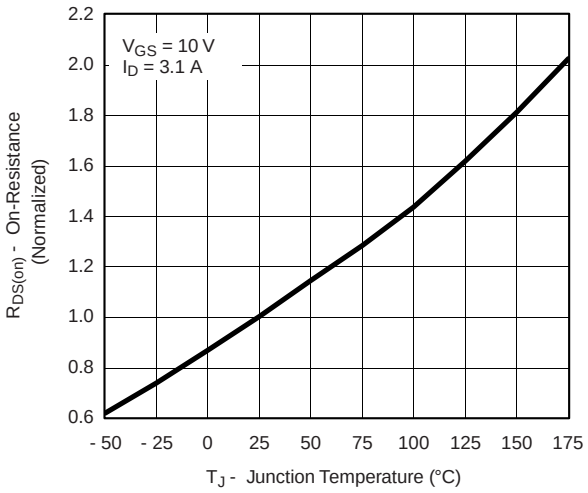

On-Resistance vs. Junction Temperature

P-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

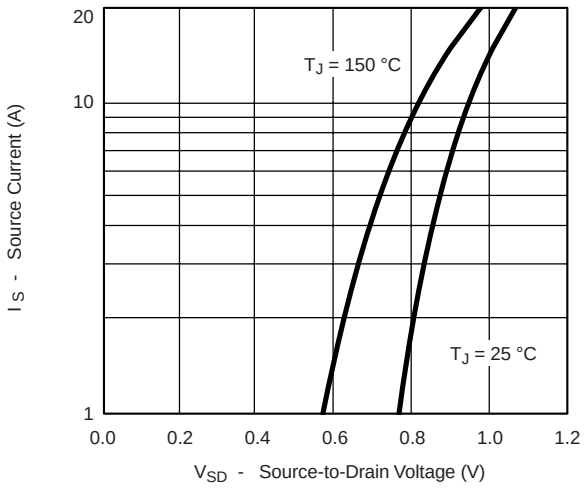

Source-Drain Diode Forward Voltage

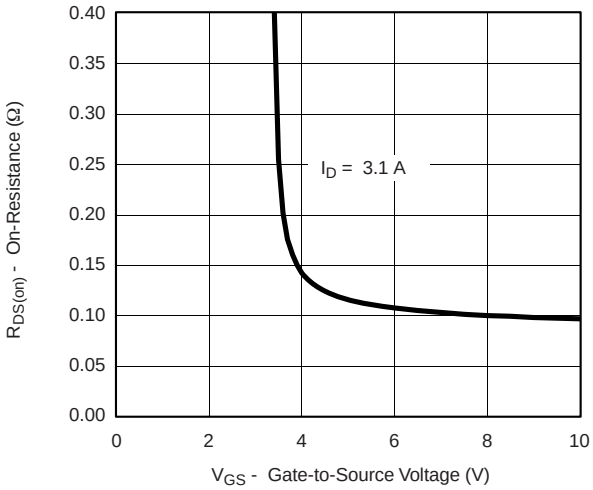

On-Resistance vs. Gate-to-Source Voltage

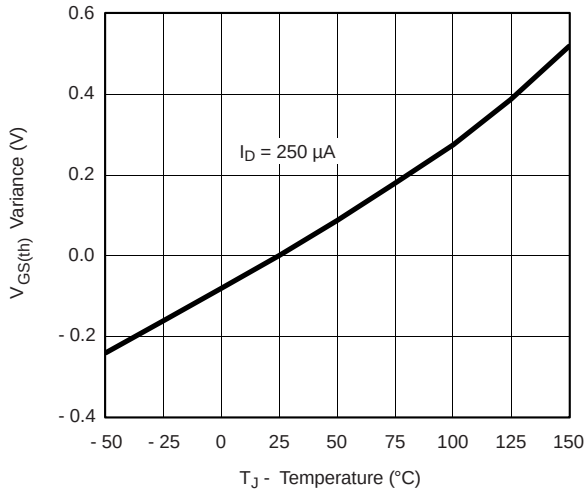

Threshold Voltage

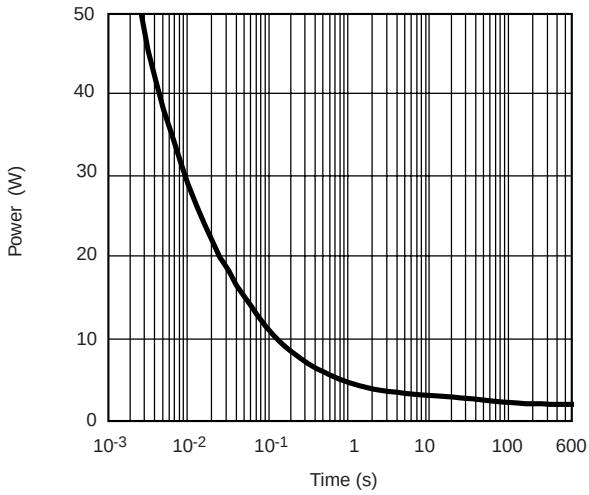

Single Pulse Power

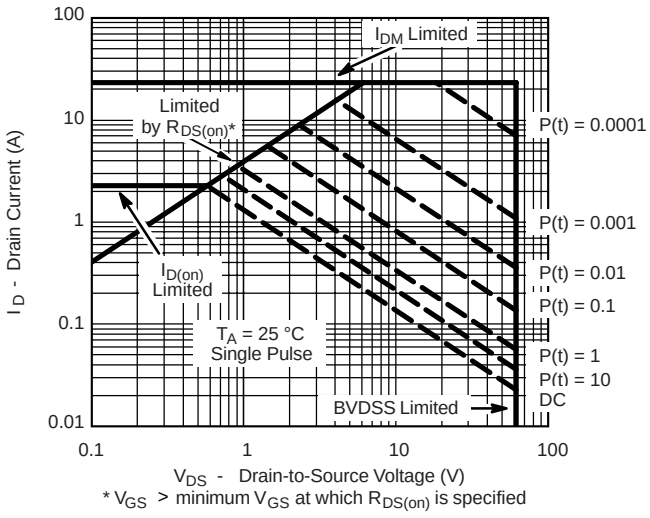

Safe Operating Area, Junction-to-Case

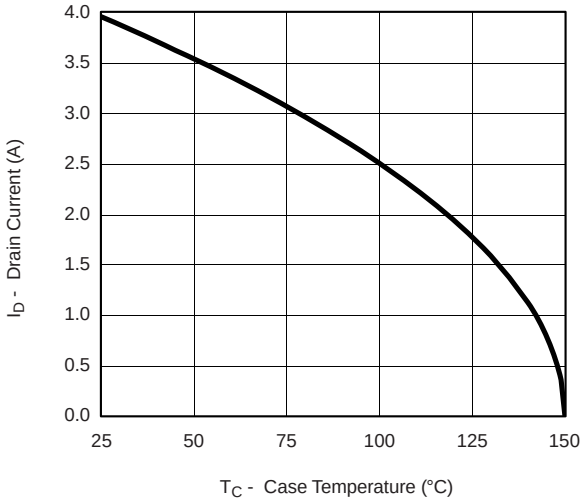

Current Derating*

P-CHANNEL TYPICAL CHARACTERISTICS 25 °C, unless otherwise noted

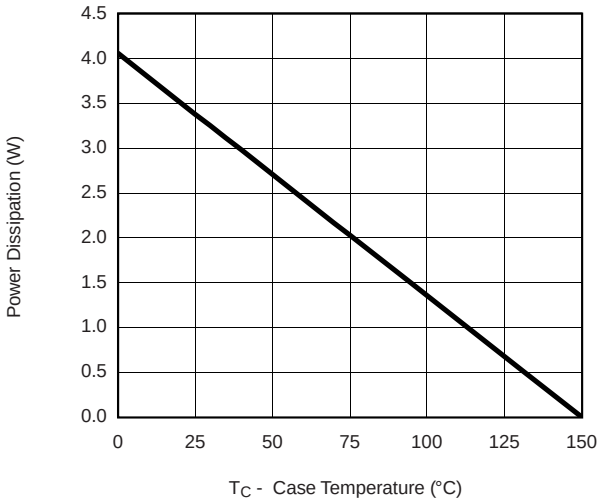

Power Derating, Junction-to-Foot

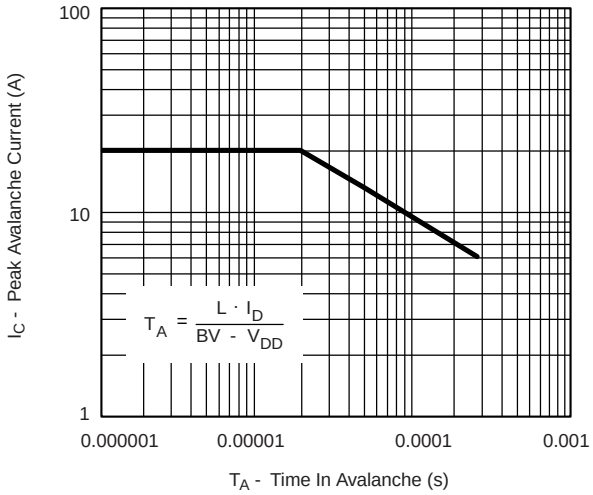

Single Pulse Avalanche Capability

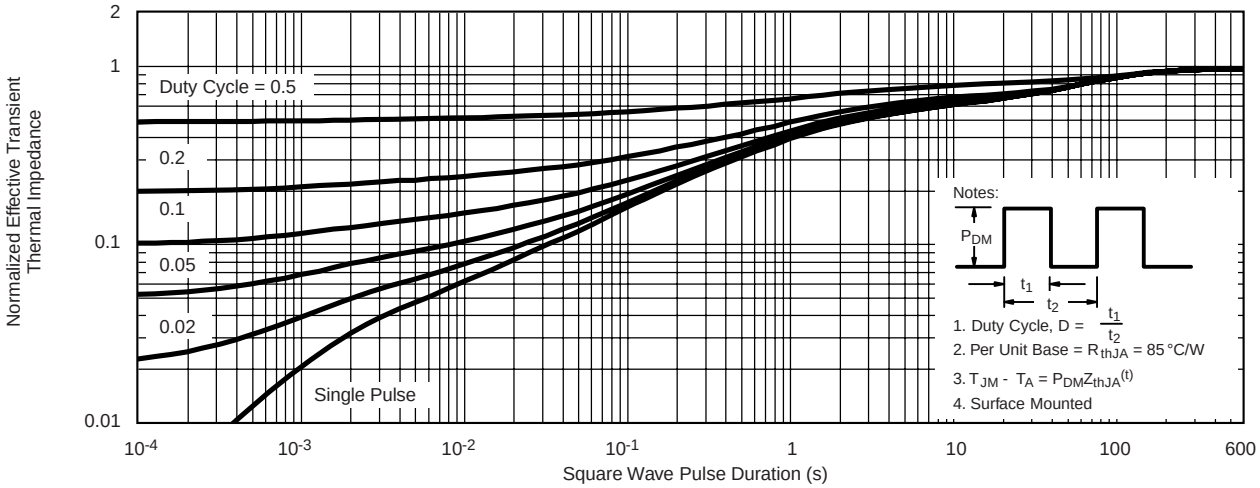

Normalized Thermal Transient Impedance, Junction-to-Ambient

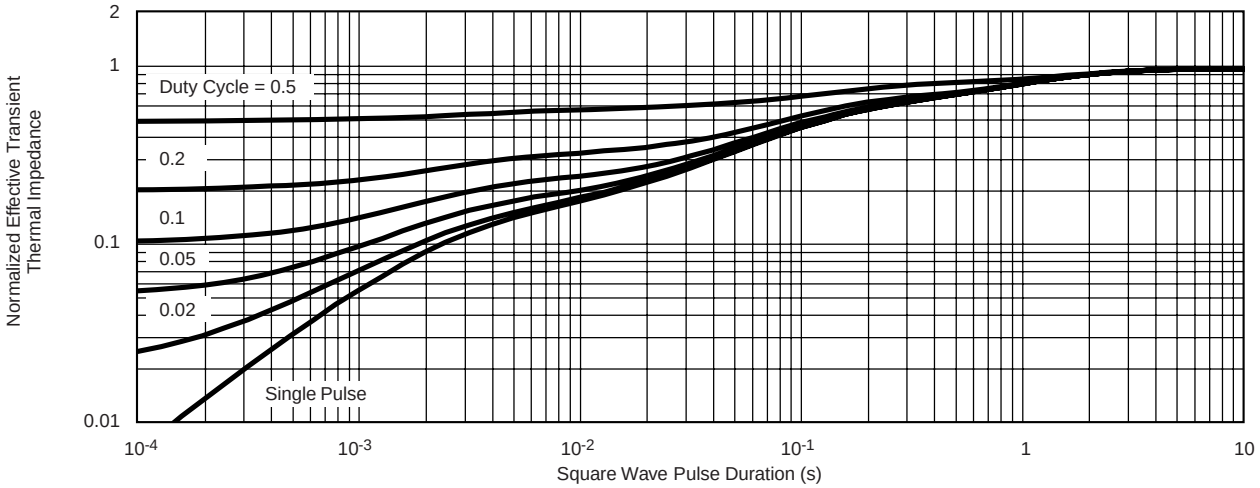

Normalized Thermal Transient Impedance, Junction-to-Foot