NOTES:

1. MATERIALS AND FINISHES:
   BODY - BRASS, GOLD PLATING
   CONTACT - BeCu, GOLD PLATING
   INSULATOR - PTFE

2. ELECTRICAL:
   A. IMPEDANCE: 50 OHM
   B. FREQUENCY RANGE: 0-26.5 GHz
   C. VSWR: 1.05+0.02 f (GHz) MAX. @ 0-18 GHz
      1.5 MAX. @ 18-26.5 GHz
   C. D.W.V: 500 VRMS.
   D. INSULATION RESISTANCE: 1000 MΩ MIN.
   E. CONTACT RESISTANCE:
      CENTER CONATCT - INITIAL 3.0 MΩ MAX.
      AFTER ENVIRONMENTAL 4.0 MΩ MAX.
      OUTER CONATCT - INITIAL 2.0 MΩ MAX.
      AFTER ENVIRONMENTAL NOT APPLICABLE


3. MECHANICAL:
   A. DURABILITY: 500 CYCLES MIN.
   B. TEMPERATURE RANGE: -65°C TO +165°C
   C. ENGAGE/DISENGAGE TORQUE: 2 INCH-LBS MIN.
   D. MATING TORQUE: 7-10 IN-LBS WHEN BODY SUPPORTED WITH WRENCH
      8 IN-LBS MAX. UNSUPPORTED
   E. CONTACT RETENTION: 4 LBS MIN. AXIAL FORCE ON PCB END
      4 IN-OZ MIN. RADIAL TORQUE


4. PACKAGING:
   A. QUANTITY: SINGLE PACK
   B. MARKING: BAG TO BE MARKED
      "AMPHENOLRF, 901-10511-1, AND DATE CODE"


THIRD ANGLE PROJ.

REVISIONS

REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	11-Jul-16	01361	KCE

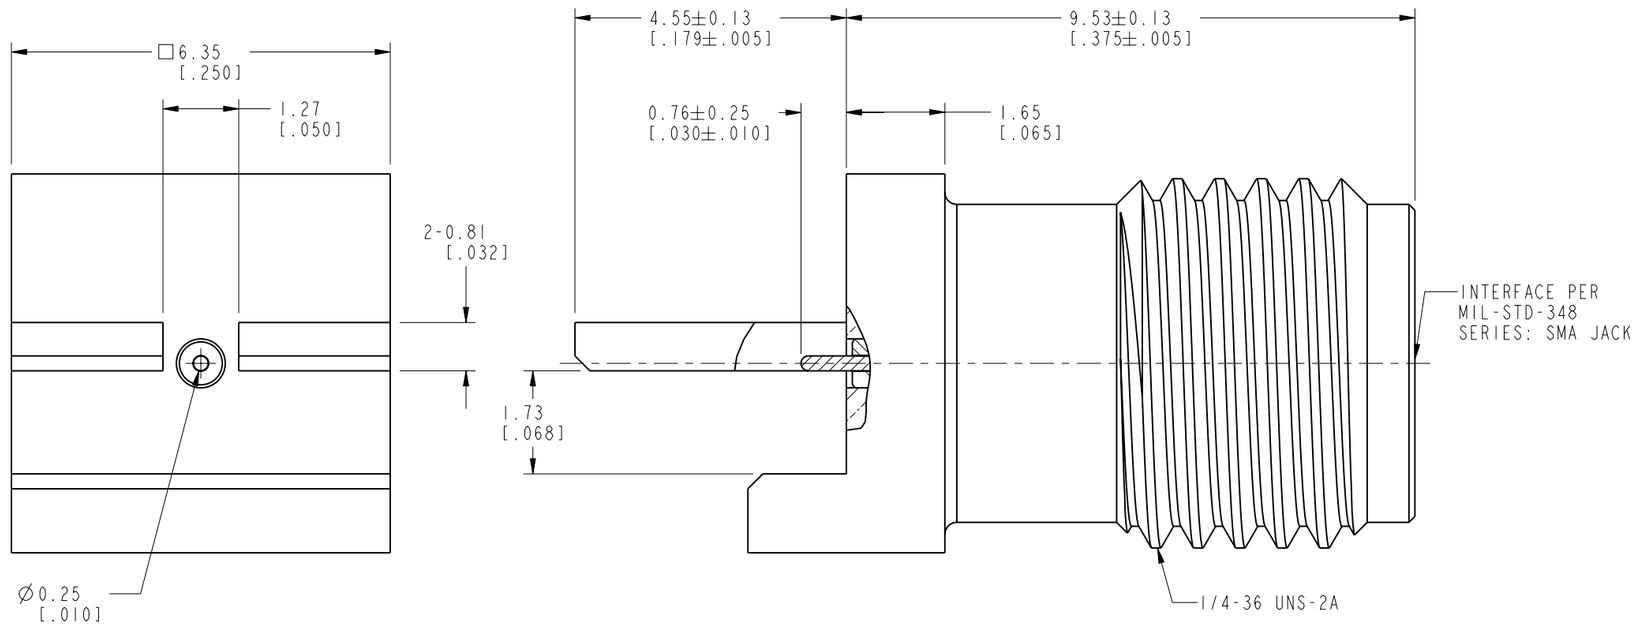

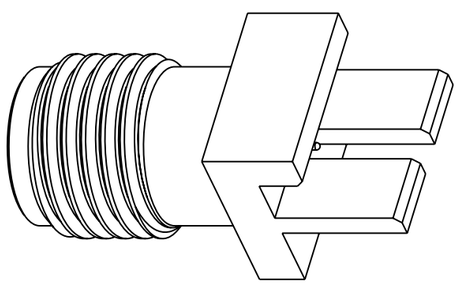

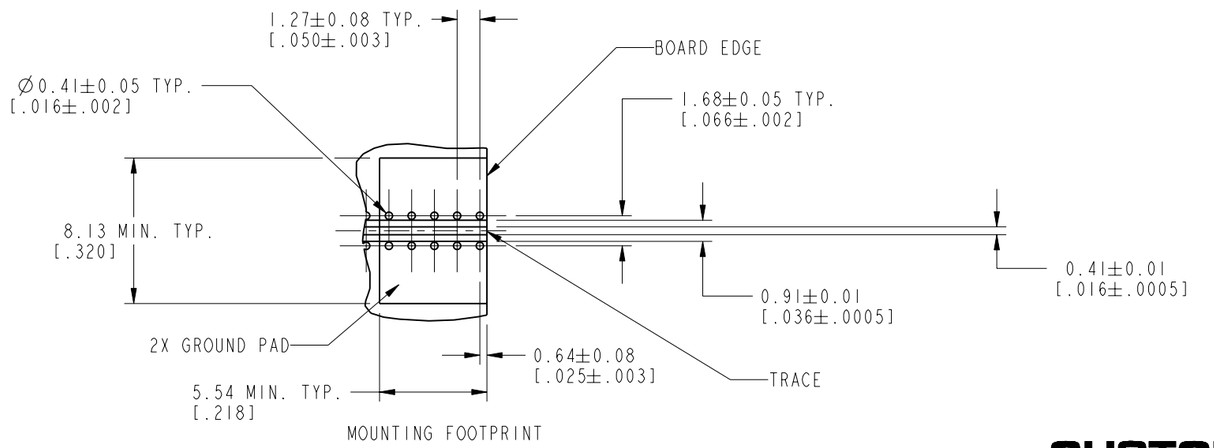

MOUNTING FOOTPRINT

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

<0.5mm	0.5 - 6mm	6 - 30mm	30 - 120mm	ANGLES
± 0.05mm	±0.1mm	±0.2mm	± 0.3mm	±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL
SEE NOTES

REFERENCE
EAR# 6471

CONFIGURATION LEVEL: In Work

FINISH

DRAWN	M.ZHANG	DATE 11-Jul-16
ENGINEER	K. ELMES	DATE 2/10/16
APPROVED	S.HSIEH	DATE 11-Jul-16
CAD FILE		

TITLE
HIGH FREQ END LAUNCH
SMA JACK ASSEMBLY,
PC MOUNT, 10 MIL PIN

SCALE: 8.0:1.0 | SHEET 2 OF 2

DWG SIZE B | REV A

Amphenol RF
www.amphenolrf.com

DRAWING NO. 901-10511-1
ITEM NO. 901-10511-1
PART NO. 901-10511-1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

68000-236HLF 70218-1116LF 70430-164LF 91614-403ALF CD15S13E4RV09LF RJSBE5080C2 68001-108HLF 68001-200HLF 69192-408HLF D15P13A6RV12LF 67996-204HLF 68002116HLF 86093967896755LF 863013A DAPO15S365TLF RJE061661210 86130202123355E1LF DCMF37P DEM09P032N LD25S33E4GV00LF 86093488314745V1LF 86093968191755E3LF 86093968813H45V1LF LD15P33E4GV00LF 95157-140LF 54202-S08-07LF 70234-112LF 76384-316LF 54202-G0805CLF 65781-158