

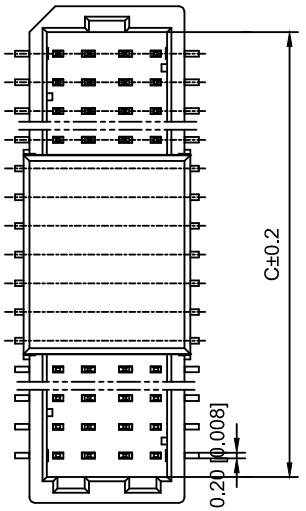
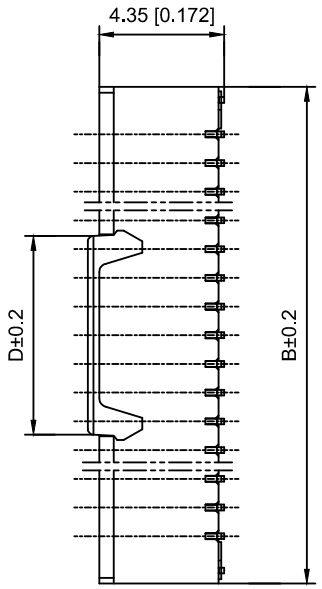
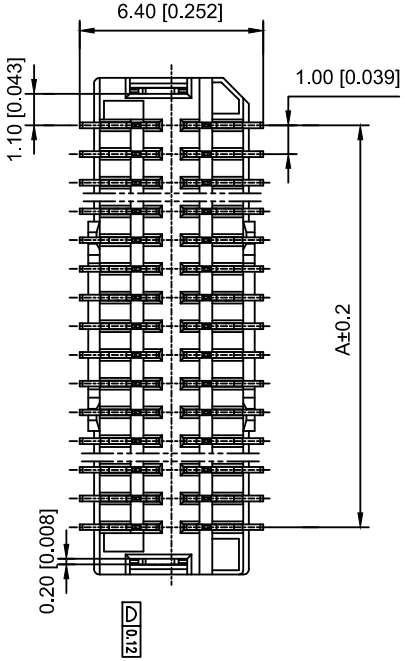







## ■ Specifications :


- Voltage rating: 50 V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ

X1011 W V S-2x11- 9T V01
① ② ③ ④ ⑤ ⑥ ⑦

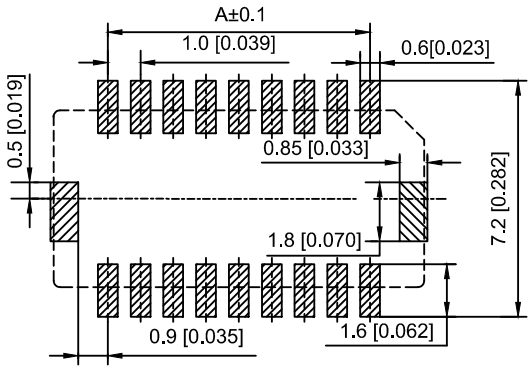① Series No.
② Category：W-WAFER
③ Wedding Board Angle ：V-Stright 180°
④ Welding Way:S-SMT
⑤ Row No.Pin No.2*02-2*25
⑥ Material:9T-PA9T 94V-0
⑦ Planting Category:SN-Bright tin plating
V01-All Gold Flash




PCB LAYOUT




| Poles | Dimensions(mm) | | | Poles | Dimensions(mm) | | |
|---|---|---|---|---|---|---|---|
| | A | B | C | | A | B | C |
| 2*02 | 1.00 | 4.30 | 2.5 | 2*14 | 13.0 | 16.30 | 14.5 |
| 2*03 | 2.00 | 5.30 | 3.5 | 2*15 | 14.0 | 17.30 | 15.5 |
| 2*04 | 3.00 | 6.30 | 4.5 | 2*16 | 15.0 | 18.30 | 16.5 |
| 2*05 | 4.00 | 7.30 | 5.5 | 2*18 | 17.0 | 20.30 | 18.5 |
| 2*06 | 5.00 | 8.30 | 6.5 | 2*20 | 19.0 | 22.30 | 20.5 |
| 2*08 | 7.00 | 10.30 | 8.5 | 2*25 | 24.0 | 27.30 | 25.5 |
| 2*10 | 9.00 | 12.30 | 10.5 | | | | |
| 2*11 | 10.00 | 13.30 | 11.5 | | | | |
| 2*12 | 11.00 | 14.30 | 12.5 | | | | |

| | | | | |
|---|---|---|---|---|
| X1011WVS-2x11-9TV01 | PA9T UL 94V-0 | Phosphor Bronze | Gold-Flash | X1011T |
| X1011WVS-2x11-9TSN | PA9T UL 94V-0 | Phosphor Bronze | TIN-Plated | |
| PART N0 | Material | Material(Pin And Solder Tabs) | Finish(Pin And Solder Tabs) | Suitable XKB Terminal |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
|---|---|---|---|---|
| | | | | |
| ΔX | | | | |
| ΔX | | | | |
| ΔX | | | | |

REVISIONS

| | |
|---|---|
| ANGLAR | ±5° |
| L≤ 4 | ±0.2 |
| 4<L≤ 16 | ±0.3 |
| 16<L≤ 63 | ±0.4 |
| L> 63 | ±0.5 |

UNSPECIFIED TOLERANCES

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

| | | | |
|---|---|---|---|
| DSND | | SCALE: N/A | MODEL TYPE: 1.0mm Crimp Style Connector |
| DWN | | VIEW: | PART NO.: X1011WVS-2x11-9TV01 |
| CHKD | | UNIT: mm/in | DWG NO.: X-X1011WVS-2x11-9TV01 |
| APPD | | SIZE: A4 | |

XKB INDUSTRIAL PRECISION CO.,LIMITED

| WEIGHT | SHEET | REVISION |
|---|---|---|
| | 1/1 | A0 |