
This document was generated on 08/17/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 1511181014
Status: Active
Overview: Milli-Grid Connector System
Description: 2.00mm Pitch, Milli-Grid PCB Header, Dual Row, Vertical, Surface Mount, 2.00µm Tin (Sn) Plating, without Peg, without Pick and Place Cap, 14 Circuits, Glow-Wire Capable, Tube

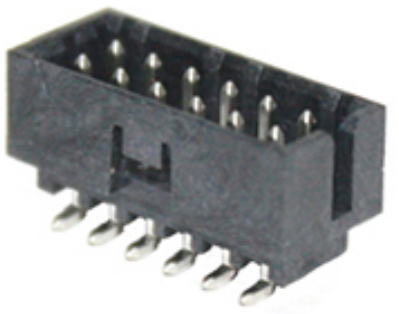

Series image - Reference only

Documents:

Drawing (PDF)
3D Model
3D Model (PDF)
Product Specification PS-151117-0001-001 (PDF)
Application Specification 503940001-AS-000 (PDF)
Application Specification 503940002-AS-000 (PDF)
Packaging Specification PK-151118-0001-001 (PDF)
Packaging Specification PK-151118-3000-001 (PDF)
Datasheet (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	151118
Application	Board-to-Board, Signal, Wire-to-Board
Overview	Milli-Grid Connector System
Product Name	Milli-Grid
UPC	889056793803

Physical

Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.660/g
Number of Rows	2
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	2.000µm
Plating min - Termination	2.000µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C

EU ELV
Not Relevant

EU RoHS | **China RoHS**
Compliant

REACH SVHC
Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free Status
Low-Halogen

For more information, please visit Contact US

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series
151118 Series

Mates With
Milli-Grid Receptacle Housing 151192 , 51110
 Milli-Grid PCB Receptacles 78787 , 78788 , 79107 , 79109

Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	2.0A
Voltage - Maximum	125V AC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Application Specification	503940001-AS-000, 503940002-AS-000
Packaging Specification	PK-151118-0001-001, PK-151118-3000-001
Product Specification	PS-151117-0001-001
Sales Drawing	SD-151118-0001-001

This document was generated on 08/17/2021
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

molex:

151660057 151670255 190670071 397730002 190690096 190990009 152670269 439151216 152670251 398800403 447642001 5046940301 0436802002 444280402 447691602 760475001 152660117 152670357 417920538 430450225 459705185 759001161 190730231 430451220 436803002 447641402 0190690033 190990010 0190700155 0436400901