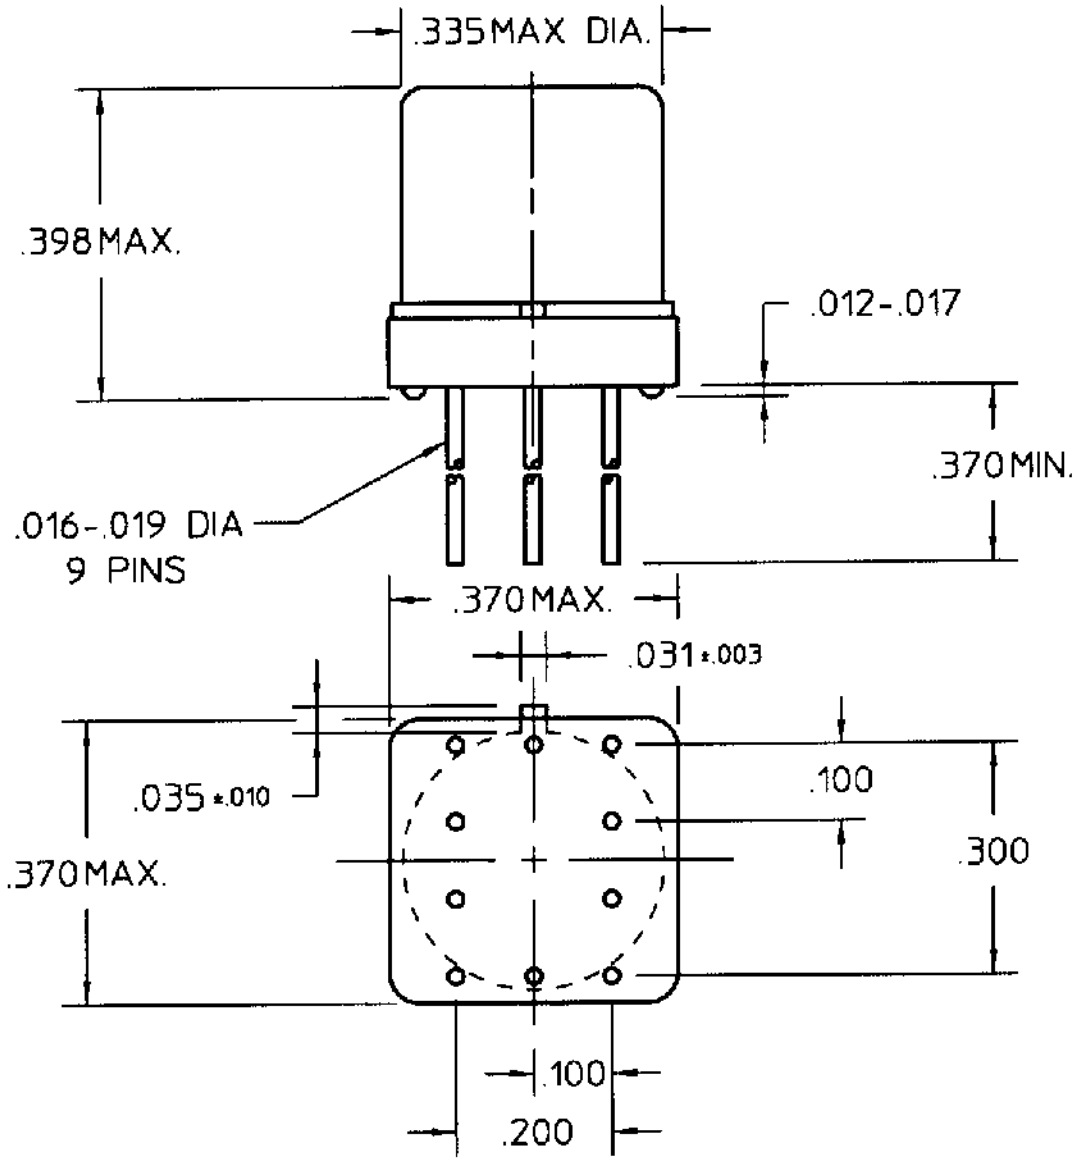


COIL: @ 25°C

RESISTANCE	50 OHMS ± 10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.7 VDC
TURN-ON BASE CURRENT	0.75 mADC
MUST RELEASE	1.4 VDC MAX, 0.22 VDC MIN.

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 2.0 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT STABILIZATION 2.0 MS MAX

CUST. QPL
CUST. NO. M28776/1-031M

TYPE "JMAT" RELAY

CUSTOMER DATA SHEET



CONTACT RATING: LOW LEVEL TO 1A 28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 8/26/97 CK Jerry 8/26/97

COMMUNICATIONS INSTRUMENTS, INC.

JMACT-5XMS

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

2-292161-3 3-1393225-0 MPT100C18RF TE50BR39J 1-794222-0 1743455-2 175977-2 2834055-1 917696-1 U5254-000005-030PA 1969656-1 2377783-2 2380312-2 1393431-1 1903112-2 3430B2F51RTDF 3631B101LL 650075-000 RH73H2A40MKTN SBCHE154R7K 1-962915-1 2310537-1 936348-1 CRGCQ2010J3K3 SBCHE64R7K SMW73R0JT 141991-2 2005330-1 CPF0402B37K4E1 ROX05SJ18R