
◆ Features

1、High-current SMD inductor.
2、Low-profile design.
3、High output processing capacity: Minimal copper loss
4、High saturation current and low DC resistance.
5、High operating frequency

◆ Dimensions

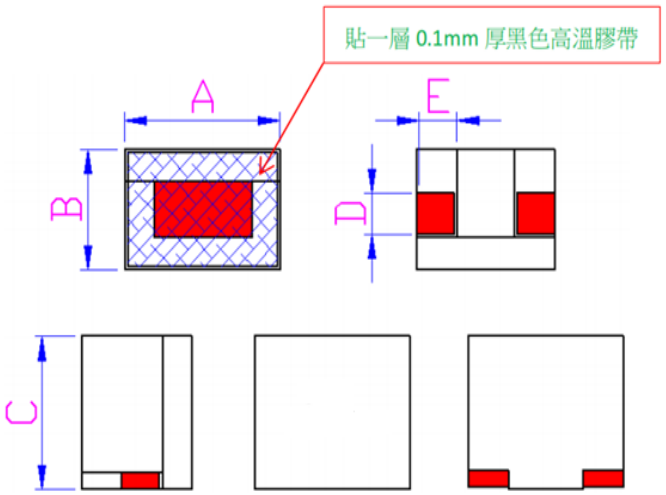

A	10.4	± 0.5
B	7.3	± 0.5
C	9.3	± 0.5
D	2.8	± 0.5
E	2.8	± 0.5

◆ Specification

Part Number	Inductance @100KHz,1 V (μH)	DC Resistance ±30% (Ω) DCR	Saturation Current(A) Isat	Heat Rating Current (A) Irms
SLA100709 Series				
SLA100709SR15LTT	0.15±15%	0.22	81	75
SLA100709SR22LTT	0.22±15%	0.24	66	60
SLA100709SR32LTT	0.32±15%	0.29	52	45
SLA100709SR47LTT	0.47±15%	0.44	26	21

◆ Standard Packing Quantity：400 pcs/reel

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Sunltech:

SLO1770H1R5MTT SLO201610T2R2MTT SLW4020P1R0MST STCM11+ SCA0806H19NJTT SLM20162R2MIT SLO1235HR47MTT SMW4532S201XTT SLD10D50S151MTT SLW4012S100MST SLO0624H100MTT SLP1045S101MTT SLP1265S220MTT SLQ1608C101MTT SLS6D38S3R3NTT S617DB1023 SLF1005-221KTT SLO252010T4R7MTT SMW3216B102ATE STC11T+ SLO1040H680MTT SLO252010F4R7MTT SLS4D28S100MTT SLS6D28S680MTT SMW5045S601NTT SLH1204S150MTT SMABA008482CE1A40 SCA1111H47NJTT SLO160808T2R2MTT SLP7045S220MTT