AMETHERM
Circuit Protection Thermistors


Data Sheet
SL22 10008

File: E209153

ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	22.0	± max
T:	6.0	± max
Lead Diameter	1.0	± nom
S:	7.5	± nom
L:	38.0	± nom
Coating Lead Run Down (straight Leads)	5.0	± max
B:	9.35	± nom
C:	3.77	± nom

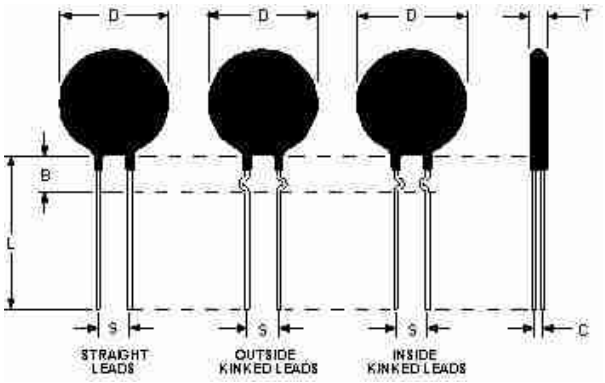

Electrical Specifications

Resistance:	10.0 Ω ± 20 %	
Max Steady State Current upto 65°c:	8.00	A
Max Rec. Energy Rating:	90	J
Actual Failure Instantaneous Energy:	200	J
Maximum Capacitance @ 120 VAC:	6,000	µf
Maximum Capacitance @ 240 VAC:	1,400	µf
Resistance @ 100% Max Current:	0.10	Ω
Resistance @ 50% Max Current:	0.19	Ω
Body Temperature at 100% Max Current:	182.00	°c
Dissipation Constant:	32.4	mw/°c
Thermal Time Constant:	122	Sec.
Material Type (for Beta and Curve):	H	

SL22 10008	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revison: a

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Ametherm:

SL15 22101-A 1DA101J-EC MS22 75004 MS32 0R536 MS32 15012 SL10 12101 SL22 20005 SL32 0R530 ACW007 SL12 17004 SL22 60003 SM08 103370 MS22 10008 SL10 10003 SL22 12103-B MS22 12103 MS22 22103 MS32 1R036 SL22 40005 AS35 3R030 MS22 20005 MS35 20010 SL03 50001 SL22 10008 MS32 50006 SL15 4R008 MS22 12104 SL10 40002 SL22 4R014 SL22 7R010