


Capacitive sensor

CBB8-18GS75-E2-V1

- 8 mm flush
- The switching distance can be set over a wide range with the potentiometer

Dimensions

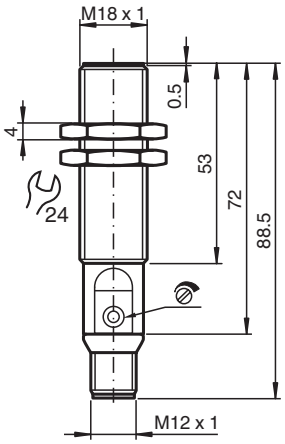

Technical Data


General specifications		
Switching function		Normally open (NO)
Output type		PNP
Rated operating distance	s_n	1 ... 8 mm
Installation		flush
Output polarity		DC
Output type		3-wire
Nominal ratings		
Installation conditions		
A		0 mm
B		0 mm
C		16 mm
F		36 mm
Operating voltage	U_B	10 ... 30 V
Switching frequency	f	0 ... 100 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing

Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 237038_eng.pdf


Technical Data

Voltage drop	U_d	≤ 1.5 V
Temperature drift		max. 20 % at -5 ... 55 °C (23 ... 131 °F)
Operating current	I_L	0 ... 100 mA
No-load supply current	I_0	≤ 18 mA
Time delay before availability	t_v	max. 300 ms
Functional safety related parameters		
$MTTF_d$		343 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
LED green		Operating display
LED yellow		indication switching state
Potentiometer		sensitivity adjustment
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Connection type		Connector plug M12 x 1 , 3-pin
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP67
Dimensions		
Length		88 mm
Diameter		18 mm

Connection



Connection Assignment




Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 237038_eng.pdf

Connection Assignment

Wire colors in accordance with EN 60947-5-2

1	|	BN	(brown)
3	|	BU	(blue)
4	|	BK	(black)

Installation

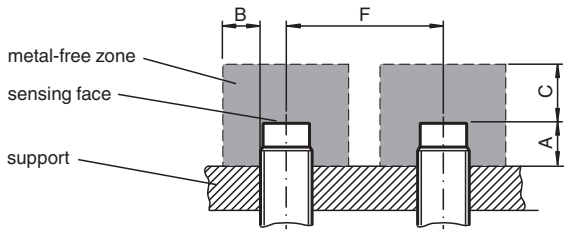

Release date: 2024-05-28 Date of issue: 2024-06-02 Filename: 237038_eng.pdf

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

PEPPERL+FUCHS:

24772 CCN15-30GS60-E2-V1 KLR-C02-2,2-2,0-K70 MH4-2057 NBB2-12GM50-A2-V1
OQT150-R100-2EP-IO-V31-L S1SD-1AI-1U.1 114642 UB800-18GM40-I-V1 OBR5000-18GK40A-E2 BF18
NBB0.8-4M25-E0 NBB0.8-5GM25-E2 OQT150-R101-2EP-IO-V31 WCS3-MH1 34441 NBB1-4GM22-E2
NBB2-8GM40-E0-V1 OBR2500-12GM40-E5 134143 GLV30-8-2500/47/73C NBB5-18GM50-E2
OBR12M-R100-2EP-IO-V31-L UB2000-F42-E6-V15 UBE800-F77-SE2-V31 NBB2-12GM50-E2
OBD450-18GK40A-E2 NBB4-12GM50-A2-V1 NBB5-18GM50-A0 NBB8-18GM50-E0