


MODEL NO.	PACKAGING
148-0701-802	ONE PCS PER BAG


REV	ECO	DATE
001	ECO-19-0037	08/28/2019





DETAIL A (15/1)






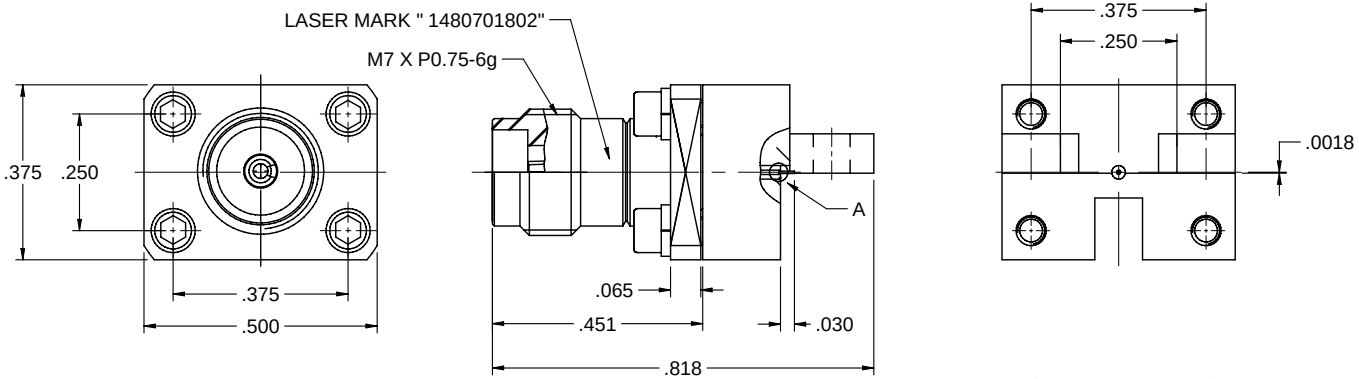







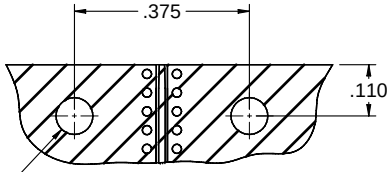

Ø .079 X 2

PCB LAYOUT





NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:
   1.1 MAIN BODY: PASSIVATED STAINLESS STEEL
   1.2 MOUNTING BODY: NICKEL PLATED BRASS
   1.3 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
   1.4 MAIN INSULATOR: ULTEM 1000,AMBER
   1.5 MOUNTING INSULATOR: PTFE, WHITE
   1.6 WASHER, BOLT: STAINLESS STEEL

2. ELECTRICAL:
   2.1 IMPEDANCE: 50 OHMS
   2.2 FREQUENCY RANGE: DC-67 GHz
   2.3 RETURN LOSS: -20DB MAX
   2.4 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
   2.5 CONTACT RESISTANCE:
      2.5.1 CENTER CONTACT: 4 MILLIOHMS MAX
      2.5.2 OUTER CONTACT: 2.5 MILLIOHMS MAX

3. MECHANICAL:
   3.1 DURABILITY: 500CYCLES MIN

4. ENVIRONMENT:
   4.1 OPERATING TEMPERATURE: -55 TO 125°C
   4.2 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
   4.3 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
   4.4 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
   4.5 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106
   4.6 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B

cinch	Model No. 148-0701-801/810		Johnson
	RoHS2 2011/65/EU	Cage Code	Title: END LAUNCH JACK SCREW-ON TYPE LOW PROFILE 1.85mm. 0.005" PIN
	.XXX ±.02 .XXXX ±.01 ANGLES ±5°	3RD ANGLE PROJECTION	Drawing No. 148-0701-801/810 Rev. 001
		Drawn By: Betty.Yu	
		Date: 08/28/2019	Size C DO NOT SCALE DRAWING Workmanship Std: NONE Sheet 1 of 1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Cinch:

147-0701-241 30-9516 40-98443N-C CJ70-7 108-0913-001 142-0403-011 415-0030-MM150 8-141 M24308/4-5F M49142/03-0005 135-3402-001 ATT-0263-04-SMA-02 DD2466134 111-0102-001 30-9506-88 415-0028-048 415-0203-024 C0909A18-11PN-106 CN1021A14G03P8-040 40-9715HM 145-0701-821 147-0701-832 415-0536-012 12-141 415-0043-MM250 DEUH-9P 131-3701-306 145-0693-002 21-14-M5.0 CN0967C10A20P6-040