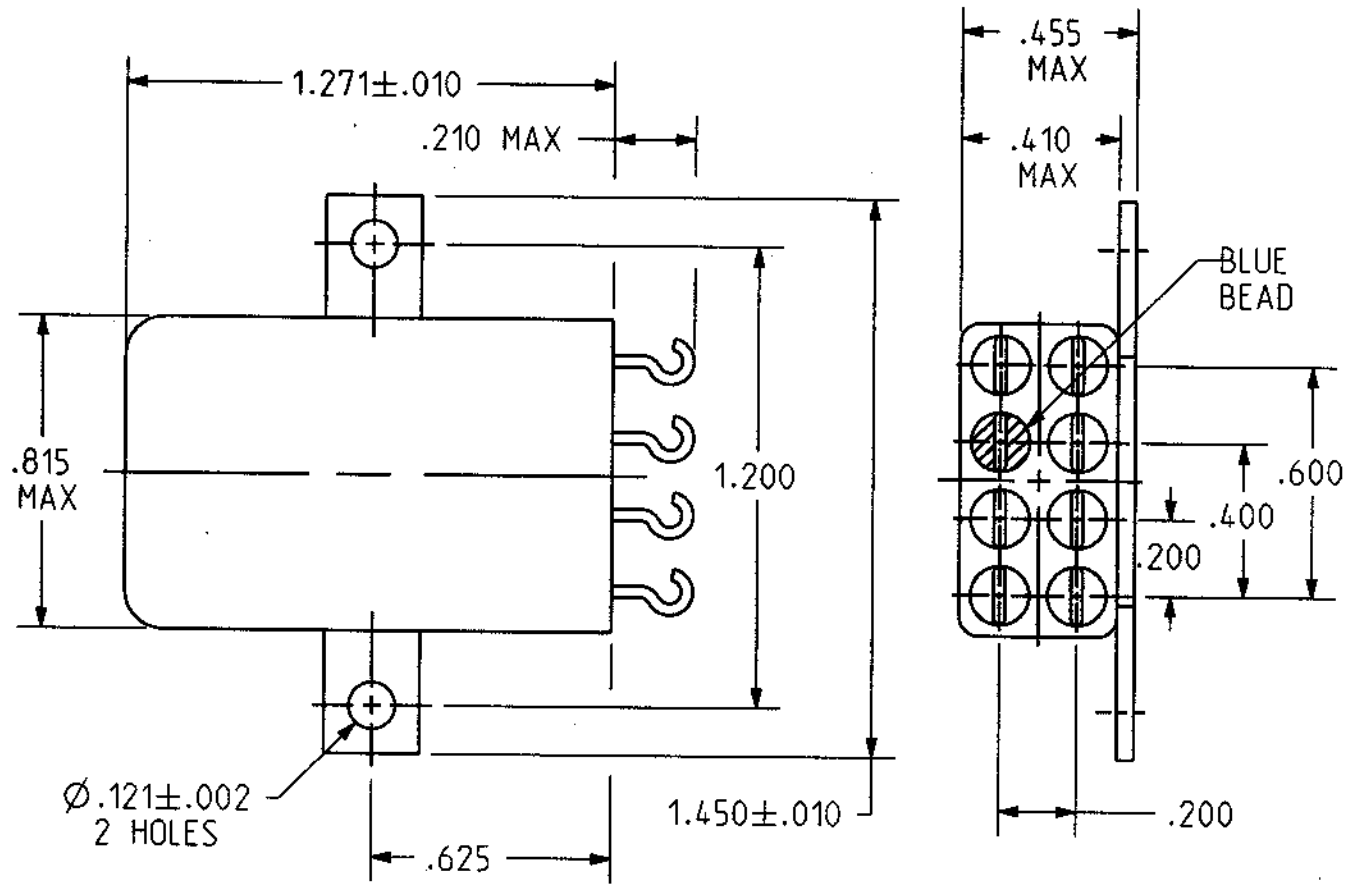


REV. 0
DCO 170668

COIL: @ 25°C

RESISTANCE 5000 OHMS ±10%

NOMINAL VOLTAGE 6.0 mADC

MUST OPERATE 2.8 mADC

MUST RELEASE 1.4 mADC MAX 0.30 mADC MIN

ENVIRONMENT:


VIBRATION 10 Hz TO 2000 Hz @ 15 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C°C

NOTES: OPERATE TIME 15 MS MAX.
RELEASE TIME 10 MS MAX.
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

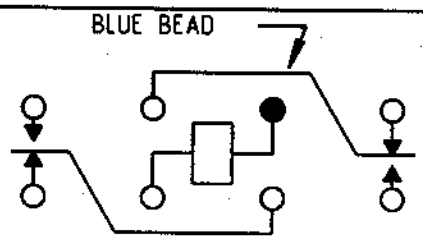

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMPS 28 VDC RESISTIVE
100,000 OPERATIONS

DR. ASB 11 JUN 02 CK. 6/11/02

CII Technologies
advanced control electronic solutions

CUST. QPL
CUST. NO. M5757/13-141 REV.

3SAT RELAY

3SAT1358A2

F-718 REV. 4

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

TE Connectivity:

1-794222-0 2834055-1 3-1393225-0 3631B101LL 650075-000 936348-1 U5254-000005-030PA 2-292161-3 CPF0402B37K4E1 CRGCQ2010J3K3 MPT100C18RF SBCHE154R7K 1743455-2 TE50BR39J 1-962915-1 175977-2 1969656-1 2310537-1 SBCHE64R7K SMW73R0JT 1393431-1 141991-2 1903112-2 2380312-2 3430B2F51RTDF 917696-1 2005330-1 2377783-2 RH73H2A40MKTN ROX05SJ18R