



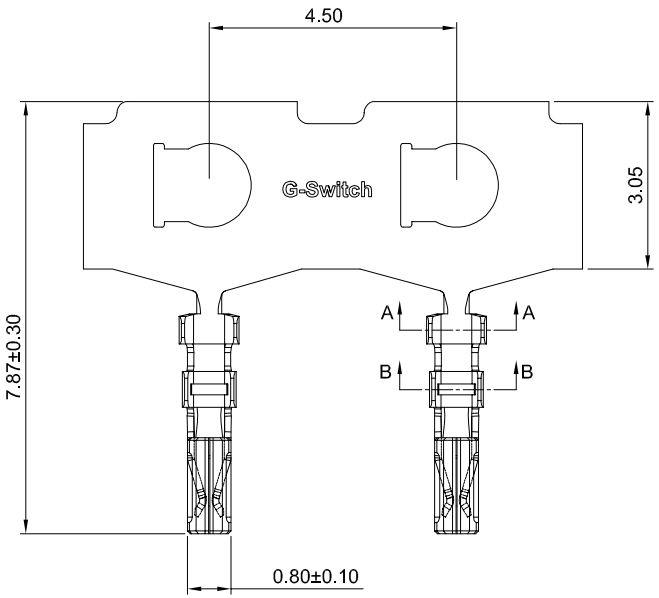


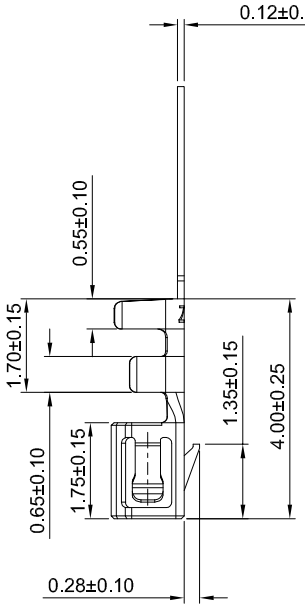





SECTION:A-A




SECTION:B-B



GT-A1008 T F -X XX 1

- **G-Switch**
- **Series No**
- **Connector**
  T-Terminal
- **F-Female**
- **Metal**
  P-Phosphor Bronze
- **Terminal Plating**
  BT-Bright Tin
  11-All G/F



G-Switch Specification:

1.Current rated: 1.0A AC/DC
2.Voltage rating: 100V AC/DC
3.Withstanding voltage: 250V AC
4.Contact resistance: 20mΩ max.
5.Insulation resistance: 100MΩ min
6.Durability cycle: 30Cycles
7.Removal force: 0.3kgf/Pin min
8.Operating temperature range: -40°C ~ +105°C

Part NO	Material	Plating	Wire Size	Insulation O.D	Reel/PCS
GT-A1008TF-PBT1	Phosphor Bronze	Bright Tin	AWG#28~32	0.80mm(Max)	15000
GT-A1008TF-P111	Phosphor Bronze	All G/F	AWG#28~32	0.80mm(Max)	15000

Pb Process Capable RoHS Compliant EU RoHS Standards

SCALE: 1:1	UNIT: mm	Title: Terminal 1.00mm Pitch Crimp Style	
SIZE: A4		Molde Code: GT-A1008TF-XXX1	

Unless otherwise General Tolerance:

X	±0.40
X.x	±0.30
X.xx	±0.20
X°	±5°
X.x°	±3°

DRAWN	CHECKED	APPROVED	DATE
Hu	Chen	Chen	2022.12.28

品赞科技 b-Switch ®
www.dg-switch.com

REV: A0 SHEET: 1/1

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

G-Switch:

GT-BTR20008-0460A-004A GT-F1007SR20-07S0101 PS-8055SVA-6PNA DC-S001B-D013-3.5A
GT-A1257WVS-103SBT01 GT-A2001HM-106W01 GT-F0503SR20-30S1101 GT-F1009SR28-18BBT01
GT-F1010SR20-30SMT01 SS-23H02-G080 GT-TC155A-H0060-L50 GT-TC194B-H0055-L1
GT-A2001WVS-110SBT01 GT-F0502SR20-22SMT01 GT-F0502SR20-23SMT01 GT-F1010SR20-07SMT01
GT-A2501WVS-103SBT01 GT-F0501SR10-08S1101 GT-F0502SR20-04SMT01 PJ-2013-L6S
ST-0275S00-082-182 GT-BTP16006-0180B-014B GT-USB-7100A GT-F1009SV44-30BBT01
GT-F0502SR20-52SMT01 GT-F0512SR18-04S0101 GT-F1007SR20-30S0101 GT-F1009DV44-25BBT01
GT-F1009SV44-17BBT01 GT-A1002WRS-112SBT01