




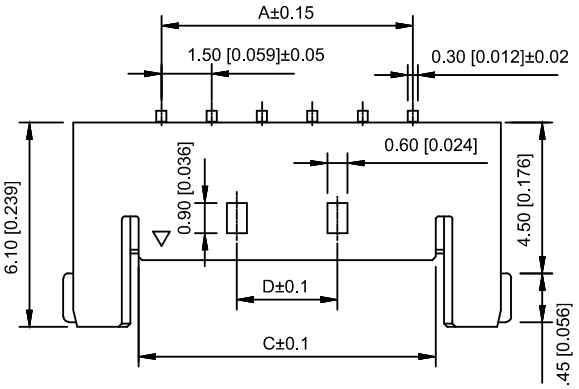


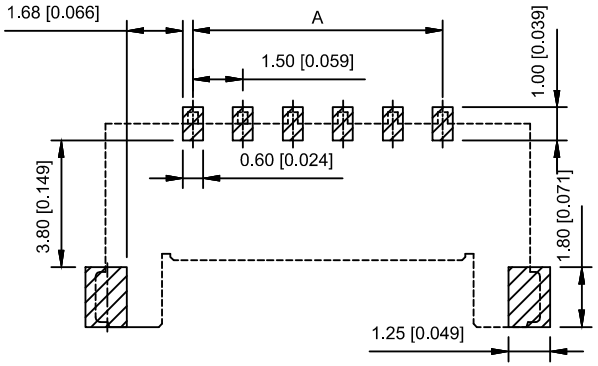


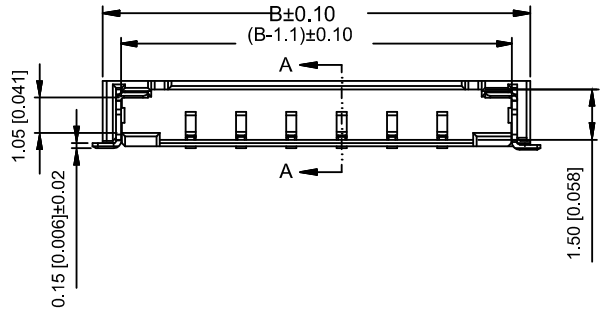


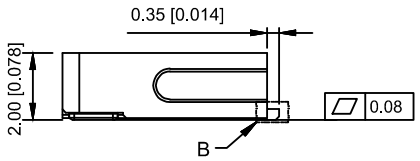






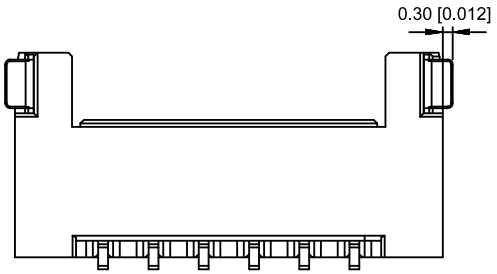



02P~04P Single Hole
Scale 1:0.7



Specifications:

规格：

1.Voltage rating:150VAC/DC

额定电压：150V AC/DC

2.Current rating:3A AC/DC

额定电流：3 A AC/DC

3.Withstanding voltage:500V AC/minute

耐受电压：500V AC/ 分钟

4.Temperature range: -25 ℃-+85℃

温度范围：-25℃-+85℃

5.Insulation resistance:1000MΩ

绝缘电阻：1000MΩ

6.Contact resistance:20mΩ

接触电阻： 20mΩ

7.After environmental testing:40mΩ

环境测试后：40 mΩ

X1503 W R S- 10 - 4T V01
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.
② Category:W-Water
③ Welding Board Angle:R-Stright 90°
④ Welding Way S-SMT
⑤ Row No -Pin No:XX-02P-12P
⑥ Plug the pin&special No
⑦ Material:4T PA4T 94V-0
⑧ Planting style:V01-Gold-Flash

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.75	2.85	
03	3.00	8.25	4.35	
04	4.50	9.75	5.85	
05	6.00	11.25	7.35	3.00
06	7.50	12.75	8.85	3.00
07	9.00	14.25	10.35	4.50
08	10.50	15.75	11.85	6.00
09	12.00	17.25	13.35	7.50
10	13.50	18.75	14.85	9.00
11	15.00	20.25	16.35	10.50
12	16.50	21.75	17.85	12.00

X1503WRS-10-4TV01	PA4T UL94V-0	Brass	Gold-Flash	Brass	Tin	X1503H
PART NO	Material	Material(Pin)	Finish(Pin)	Material(Solder Tabs)	Finish(Solder Tabs)	Suitable XKB Housing

					ANGLAR	±5°
ΔX					L≤ 4	±0.2
ΔX					4<L≤ 16	±0.3
ΔX					16<L≤ 63	±0.4
MARK	DESCRIPTION	DATE	REVISED	APPROVED	L> 63	±0.5
REVISIONS					UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

DSND		SCALE: N/A	MODEL TYPE: Wire to Board Connector
DWN		VIEW:	PART NO.: X1503WRS-10-4TV01
CHKD		UNIT: mm/in	DWG NO.: X-X1503WRS-10-4TV01
APPD		SIZE: A4	

WEIGHT	SHEET	REVISION
	1/1	A0