


ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

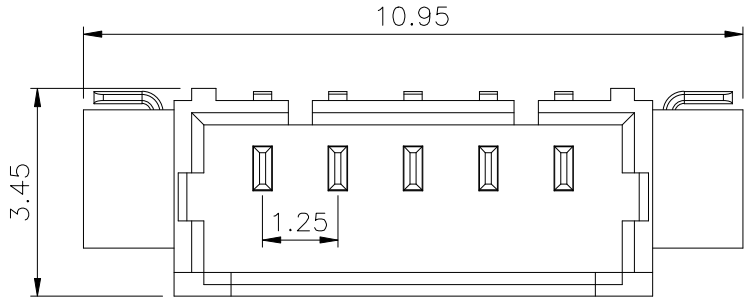

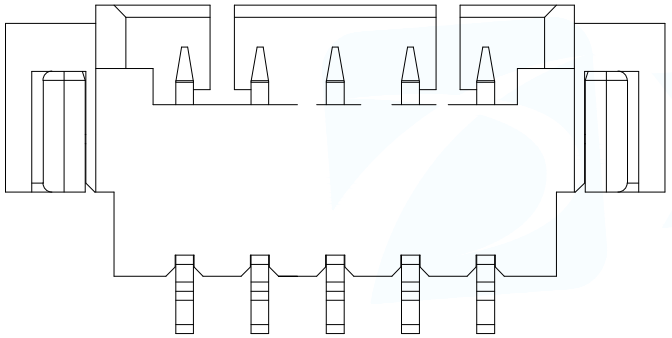

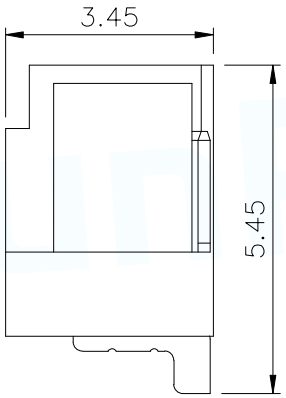

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V_0

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:

UNDERPLATE: NICKEL.

SPECIFICATIONS:

Voltage Rating:125V AC DC


Current Rating:1A AC,DC

Withstanding voltage:500V AC 1/Minute

Insulation Resistance:100MΩ Min

Contact Resistance:20mΩ Max

Temperatuer Range:−25℃ ~+ 85℃

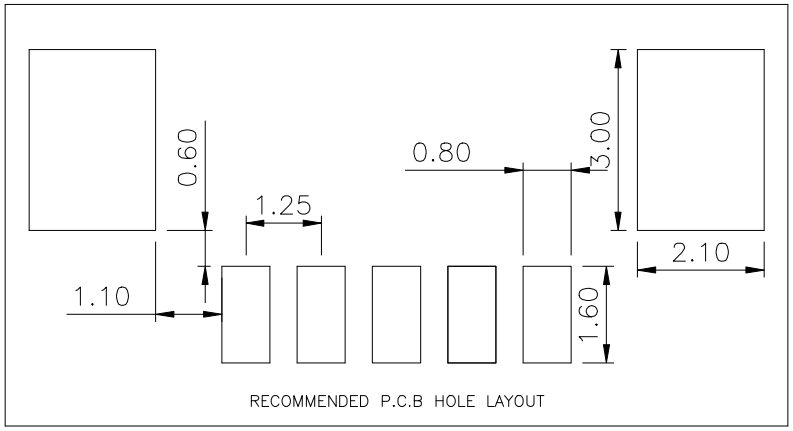

RECOMMENDED P.C.B HOLE LAYOUT

MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd	
UNLESS OTHERWISE SPECIFED TOLERANCES			TITLE: WAFER 1.25 卧贴5P
			PAR: WAFER−125W−5P
DECIMALS:	ANGLES:		DWN:
X.X:±0.35	X.X°:±3°		CHKD:
X.XX:±0.25	X.XX:±2°		APVD:
X.XXX:±0.15		CUSTOMER COPY	SCALE1:1 / UNIT:MM / SIZE:A4 / SHEET:1F1 / REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5AS-5PWCR-H20 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-14PWCR-H20 FPC-1.0HF-4PWAR-H20
FPC-0.5FX-16PWCR-H20 TYPEC-304YDSW-ACP16 WAFER-VH3.96-4PLB FPC-0.5AL-6PB
FPC-0.5FX-4PWBH15 RJ45-005-014-11 WAFER-GH1.25-6PLB WAFER-PH2.0-6PWB WAFER-PH2.0-8PLB
HDMI-212L PHB2.0-02-20PZZ DC-031A-A100 FPC-0.5AX-24PWCR-H20 FPC-0.5HF-10PWBR-H20
FPC-1.0AX-4PWCR-H25 MU-103-ARW64 SMA-KWE-323C-H13X23-LW WAFER-PH2.0-11PZZ
WAFER-PH2.0-3PWB FPC-0.5FX-20PWBH15 FPC-1.0AX-14PWCR-H25 WAFER-MX1.25B-8PWB
WAFER-PH2.0-2PJK WAFER-WBM4.2-16PJK-GB FPC-0.5FX-4PWCR-H20 WAFER-XH2.54-4PWZ-H62