
Rocker Switch | **RE2-1A-DC-1-UL**


SWITCH COMPONENTS

Mechanical Dimensions (mm)

Tolerances ±0.3 Unless Otherwise Specified

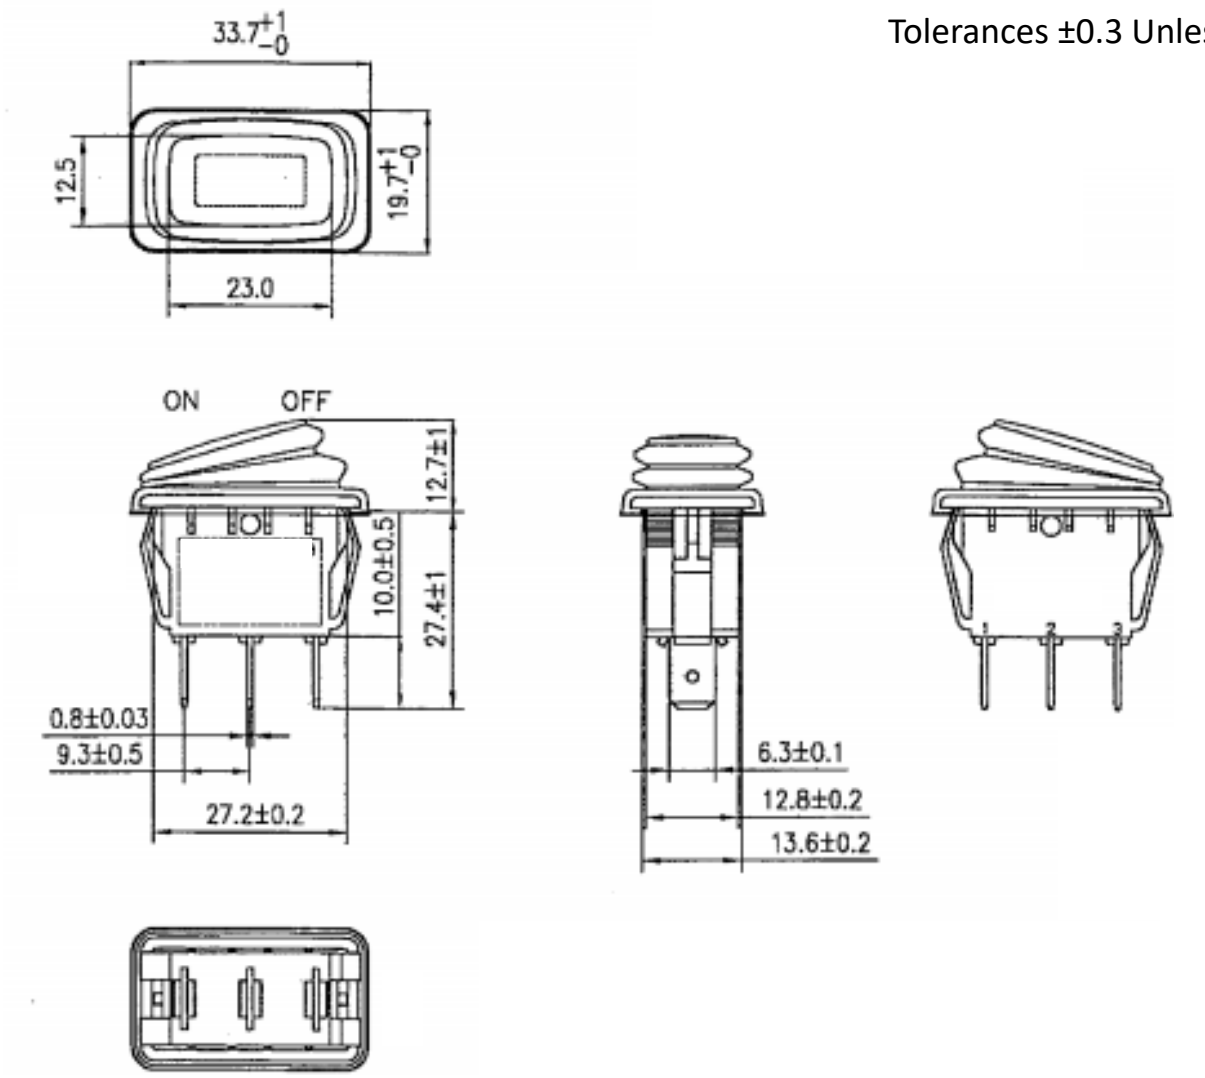


Mounting Hole

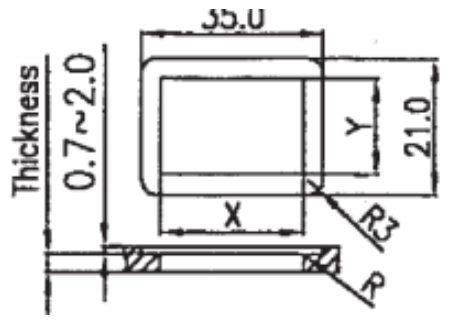

Thickness	X	Y
0.75~2.5	27.6-0.1	13.8+0.1
2.5~3.5	27.8-0.1	13.8+0.1
3.5~4.5	28-0.1	13.8+0.1

Circuit Diagram

3P SPST OFF-ON (LED-D)



Electrical Specifications

Rating	25A 14V DC
Contact Resistance	50m ohm Max.
Insulation Resistance	DC 500V 100M ohm Min.
Dielectric Strength	AC 1500V 1 minute
Operation Temperature	-25°C~85°C

Material Specifications

Frame	Black, Nylon#66
Actuator	Blue, Nylon#66+30%GF
Terminal	1,2:Copper alloy, Silver plated 3: Brass alloy
LED	Blue (Dependent)
Waterproof	IP65, Black Silicone Rubber

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Switch Components:

RF3-1A-DC-2-GL RG3-1A-DC-1-B SRD2-2F-DC-1-BNN TA1-1A-DC-4 TB1-2H-DC-6 TE3-1A-DC-1-AL SRC1-1B-DC-1-B TA2-1A-DC-5 WR1 PD-1E-DC-9-UL SB-1B-DC-3-B SRB1-1G-DC-1-NN TA2-1G-DC-6-O TE6-1A-DC-1-UL PB-1A-DC-2-RDL RD2-1A-DC-1-AL SC-B SRD2-2F-DC-1-RNN TC6-P1-Z SRA1-1A-DC-1-NN-2 SRD1-2A-DC-1-BGN RA4-2A-DC-2-AL SB-1B-DC-3-R SRA1-2F-DC-1-NN SRD2-1G-DC-1-BNN TE1-1F-DC-1-PB PB-1A-DC-2-B PB-1B-DC-2-RIL RC-1A-DC-1-AL RF1-1A-DC-2-B-3