

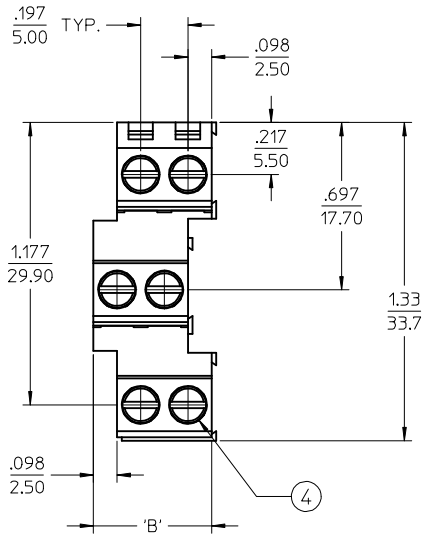


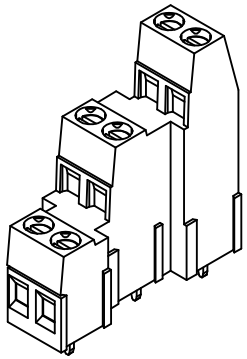



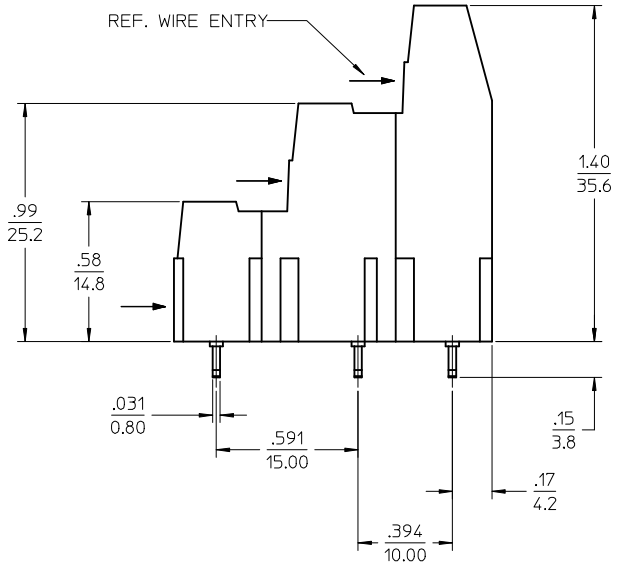
REF. 6 POLE (398900906) SHOWN
SCALE: 2X

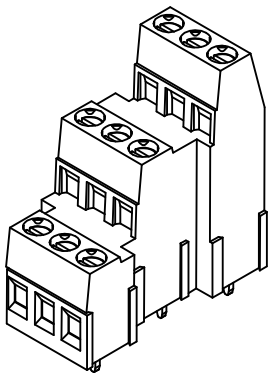


REF. 3 POLE (398900909) SHOWN
SCALE: 2X

| CIR. QTY. | PART NO. | 'A' | ('A'mm) | 'B' | ('B'mm) | 'C' | ('C'mm) |
|---|---|---|---|---|---|---|---|
| 6 | 398900906 | .394 | 10.01 | .492 | 12.50 | .197 | 5.00 |
| 9 | 398900909 | .591 | 15.01 | .689 | 17.50 | .394 | 10.01 |
| 12 | 398900912 | .788 | 20.02 | .886 | 22.50 | .591 | 15.01 |
| 15 | 398900915 | .985 | 25.02 | 1.083 | 27.51 | .788 | 20.02 |
| 18 | 398900918 | 1.182 | 30.02 | 1.280 | 32.51 | .985 | 25.02 |
| 21 | 398900921 | 1.379 | 35.03 | 1.477 | 37.52 | 1.182 | 30.02 |
| 24 | 398900924 | 1.576 | 40.03 | 1.674 | 42.52 | 1.379 | 35.03 |
| 27 | 398900927 | 1.773 | 45.03 | 1.871 | 47.52 | 1.576 | 40.03 |
| 30 | 398900930 | 1.970 | 50.04 | 2.068 | 52.53 | 1.773 | 45.03 |
| 33 | 398900933 | 2.167 | 55.04 | 2.265 | 57.53 | 1.970 | 50.04 |
| 36 | 398900936 | 2.364 | 60.05 | 2.462 | 62.53 | 2.167 | 55.04 |
| 39 | 398900939 | 2.561 | 65.05 | 2.659 | 67.54 | 2.364 | 60.05 |
| 42 | 398900942 | 2.758 | 70.05 | 2.856 | 72.54 | 2.561 | 65.05 |
| 45 | 398900945 | 2.955 | 75.06 | 3.053 | 77.55 | 2.758 | 70.05 |
| 48 | 398900948 | 3.152 | 80.06 | 3.250 | 82.55 | 2.955 | 75.06 |
| 51 | 398900951 | 3.349 | 85.06 | 3.447 | 87.55 | 3.152 | 80.06 |
| 54 | 398900954 | 3.546 | 90.07 | 3.644 | 92.56 | 3.349 | 85.06 |
| 57 | 398900957 | 3.743 | 95.07 | 3.841 | 97.56 | 3.546 | 90.07 |
| 60 | 398900960 | 3.940 | 100.08 | 4.038 | 102.57 | 3.743 | 95.07 |
| 63 | 398900963 | 4.137 | 105.08 | 4.235 | 107.57 | 3.940 | 100.08 |
| 66 | 398900966 | 4.334 | 110.08 | 4.432 | 112.57 | 4.137 | 105.08 |
| 69 | 398900969 | 4.531 | 115.09 | 4.629 | 117.58 | 4.334 | 110.08 |
| 72 | 398900972 | 4.728 | 120.09 | 4.826 | 122.58 | 4.531 | 115.09 |

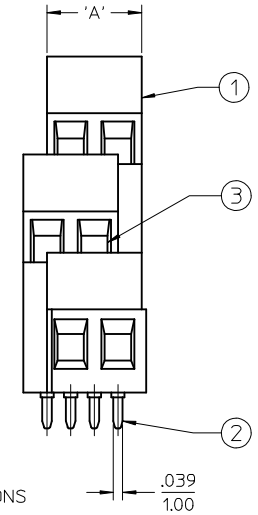


RECOMMENDED PTH PATTERN
REF. FACING BOARD
398900909 SHOWN

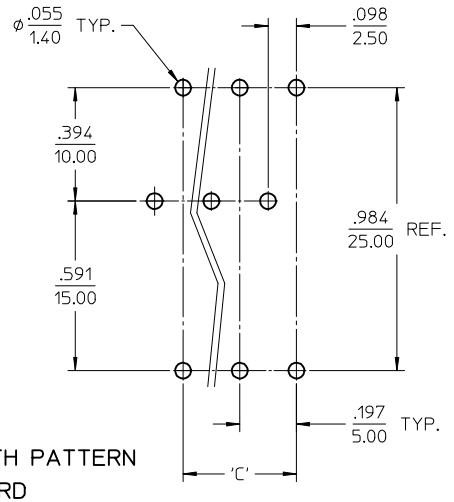NOTES:
1. MATERIAL: SEE TABLE
2. FINISHES: SEE TABLE
3. ELECTRICAL SPECIFICATIONS
   VOLTAGE RATING: 300V
   CURRENT RATING: 17.5 AMPS
4. UL FILE: E48521
5. WIRE RANGE: 12-30 AWG
6. WIRE STRIP LENGTH: .25 IN. (6.4mm)
7. OPERATING TEMP: -40°C TO 105°C
8. SCREW TORQUE RANGE: 4.43 TO 7.00 IN LBS (.50 TO .79 NM)
9. PCB THICKNESS: .110 (2.8mm) MAX.
10. XX REFERS TO THE NUMBER OF CIRCUITS
11. DIMS SHOWN ARE FOR REFERENCE ONLY
12. ASSEMBLY IS RoHS COMPLIANT

| ITEM | QTY. | DESCRIPTION | MATERIAL | FINISH |
|---|---|---|---|---|
| 4 | XX | SCREW, M3 | Cu ALLOY | NICKEL PLATED |
| 3 | XX | CAGE CLAMP | Cu ALLOY | NICKEL PLATED |
| 2 | XX | TERMINAL | Cu ALLOY | TIN PLATED |
| 1 | 1 | TERMINAL BLOCK HOUSING | NYLON | BLACK |

NEW SALES DOC
EC NO: IPG2013-0678 2012/11/09
DRWN:RSTONE 2012/11/14
CH'KD:
APPR:DTITUS
DESCRIPTION
REV A

QUALITY SYMBOLS
▼=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± .005 |
| 2 PLACES | ± 0.13 | ± .01 |
| 1 PLACE | ± 0.3 | ± --- |
| 0 PLACE | ± --- | ± --- |

ANGULAR ± 2 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: IN/MM
SCALE: 2.5:1
DESIGN UNITS: INCH
THIRD ANGLE PROJECTION

DRAWN BY: RSTONE DATE: 2012/11/09
CHECKED BY: DATE:
APPROVED BY: DTITUS DATE: 2012/11/14
MATERIAL NO.: SEE CHART

TITLE: EURO STYLE PCB TERMINAL BLOCK, TRI LEVEL MEDIUM PROFILE

molex

DOCUMENT NO.: SD-39890-009
SHEET NO.: 1 OF 1
SIZE: C

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## molex:

347910140 351820290 528523070 197054301 348268126 349672001 502584-1060 348242245
357470310 5023860371 0477256010 502584-0870 528520870 197134001 347072012 347928042
355240920 0351510214 194270031 459850483 502585-0370 0194360214 194290026 194290039
34708-2028 502380-0800 0464363133 464373005 503988100 528061110