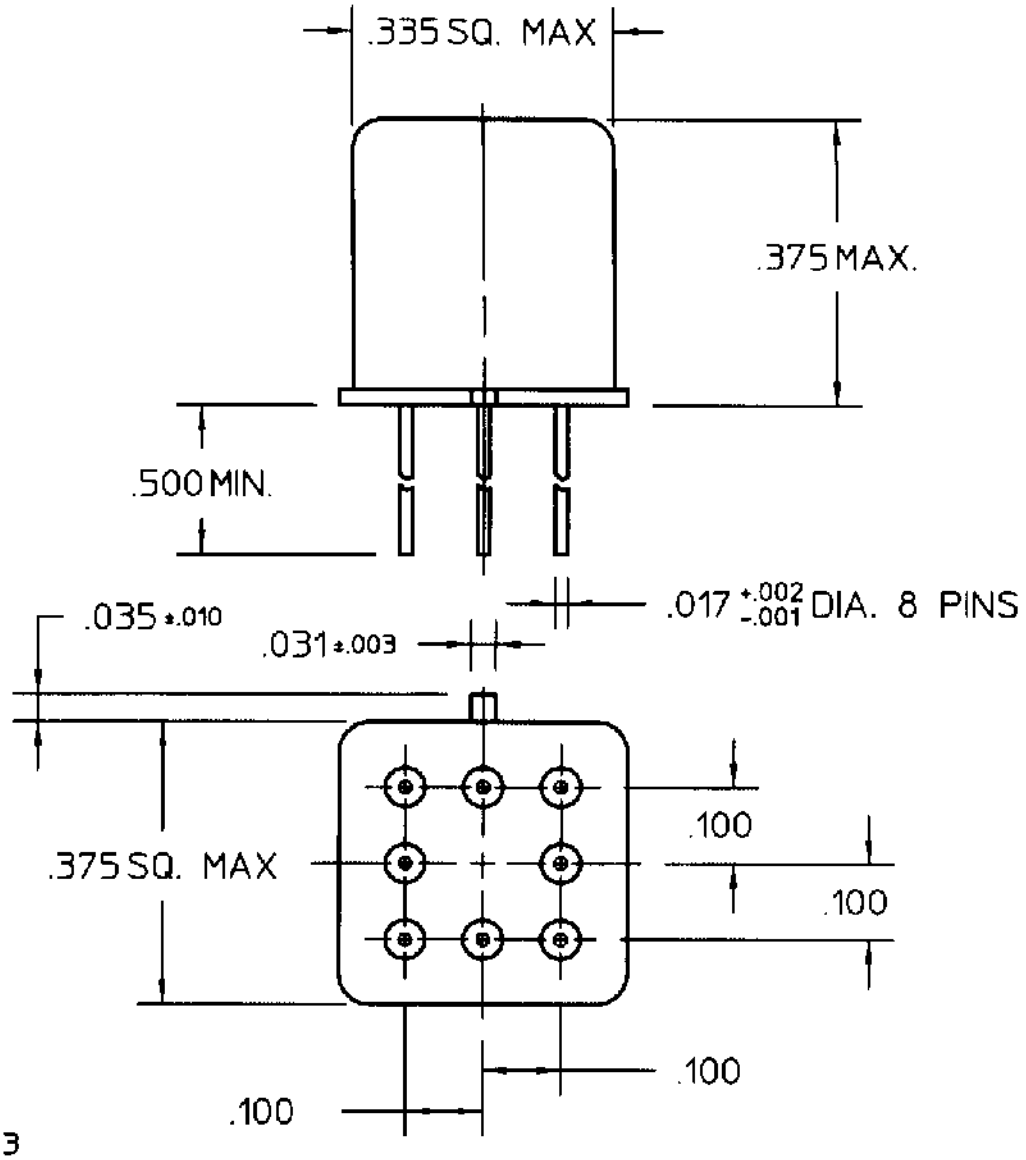



REV. 0

DCO 141053

COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 200 OHMS ± 10% |
| NOMINAL VOLTAGE | 6.0 VDC |
| MUST OPERATE | 3.4 VDC |
| MUST RELEASE | 2.0 VDC MAX, 0.28 VDC MIN. |

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 4.0 MS MAX
RELEASE TIME 7.5 MS MAX
CONTACT STABILIZATION 2.5 MS MAX.

## CUSTOMER DATA SHEET




TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS MIN

DR. B.D. 5/10/99 CK. 5/10/99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. QPL
CUST. NO. M39016/42-034P

TYPE JMGSD RELAY

# JMGSCD-6P

F-718 REV 1

# Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

## TE Connectivity:

175977-2 917696-1 SMW73R0JT TE50BR39J 2377783-2 U5254-000005-030PA 141991-2 1903112-2 2834055-1 3-1393225-0 650075-000 2005330-1 ROX05SJ18R SBCHE64R7K 2310537-1 3631B101LL 936348-1 MPT100C18RF 1743455-2 2380312-2 3430B2F51RTDF SBCHE154R7K 1-962915-1 1969656-1 CPF0402B37K4E1 2-292161-3 CRGCQ2010J3K3 RH73H2A40MKTN 1-794222-0 1393431-1