



ROHS Compliant

MAPX	MODIFICATION	DATE	DRAW	APPROVE

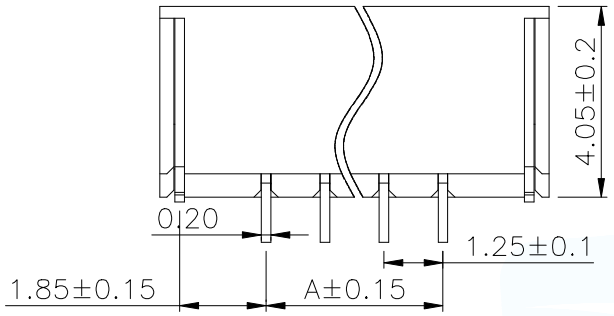

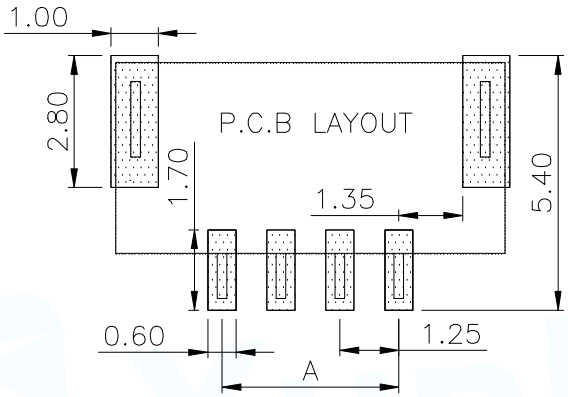

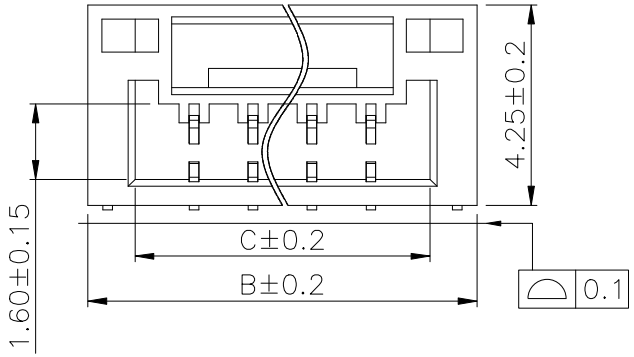



Part No	Pin	A	B	C
WAFER-GH1.25-2PWB	2	1.25	5.75	3.75
WAFER-GH1.25-3PWB	3	2.50	7.00	5.00
WAFER-GH1.25-4PWB	4	3.75	8.25	6.25
WAFER-GH1.25-5PWB	5	5.00	9.50	7.50
WAFER-GH1.25-6PWB	6	6.25	10.75	8.75
WAFER-GH1.25-7PWB	7	7.50	12.00	10.00
WAFER-GH1.25-8PWB	8	8.75	13.25	11.25
WAFER-GH1.25-9PWB	9	10.00	14.50	12.50
WAFER-GH1.25-10PWB	10	11.25	15.75	13.75
WAFER-GH1.25-11PWB	11	12.50	17.00	15.00
WAFER-GH1.25-12PWB	12	13.75	18.25	16.25
WAFER-GH1.25-13PWB	13	15.00	19.50	17.50
WAFER-GH1.25-14PWB	14	16.25	20.75	18.75
WAFER-GH1.25-15PWB	15	17.50	22.00	20.00
WAFER-GH1.25-16PWB	16	18.75	23.25	21.25

NOTES:

1.BASE: LCP
2.PIN: Brass
3.Solder Tab: Brass

SPECIFICATIONS:

1.Spacing: 1.25
2.Voltage Rating: 125V AC DC
3.Current Rating: 1A AC,DC
4.Insulation Resistance: 100MΩ Min
5.Contact Resistance: 20mΩ Max
6.Withstanding voltage: 500V AC 1/Minute
7.Temperatuer Range: −25℃ ~+ 85℃

MANUFACTURE DWG	东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co,Ltd		
UNLESS OTHERWISE SPECIFED TOLERANCES		TITLE: WAFER GH1.25 卧贴带扣	
DECIMALS: / ANGLES:		PAR	WAFER-GH1.25-NPWB
X.:±0.2 / X°.:±5°		DWN	
.X:±0.1 / X.X°:±3°		CHKD	
.XX:±0.05 / X.XX°:±1°	CUSTOMER COPY	APVD	
		SCALE1:1 / UNIT:MM	
		SIZE:A4 / SHEET:1F1	REV:A

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

XUNPU:

FPC-0.5FX-14PWCR-H20 MU-103-ARW64 RJ45-005-014-11 WAFER-PH2.0-2PJK FPC-0.5AL-6PB FPC-0.5FX-20PWBH15 FPC-1.0HF-4PWAR-H20 SMA-KWE-323C-H13X23-LW DC-031A-A100 FPC-0.5AS-5PWCR-H20 FPC-0.5AX-24PWCR-H20 FPC-0.5AX-30PWCR-H20 FPC-0.5FX-4PWCR-H20 WAFER-MX1.25B-8PWB WAFER-PH2.0-11PZZ FPC-0.5FX-4PWBH15 FPC-1.0AX-14PWCR-H25 WAFER-PH2.0-3PWB FPC-0.5FX-16PWCR-H20 FPC-1.0AX-4PWCR-H25 WAFER-GH1.25-6PLB HDMI-212L PHB2.0-02-20PZZ TYPEC-304YDSW-ACP16 WAFER-WBM4.2-16PJK-GB WAFER-XH2.54-4PWZ-H62 WAFER-PH2.0-8PLB WAFER-VH3.96-4PLB FPC-0.5HF-10PWBR-H20 WAFER-PH2.0-6PWB