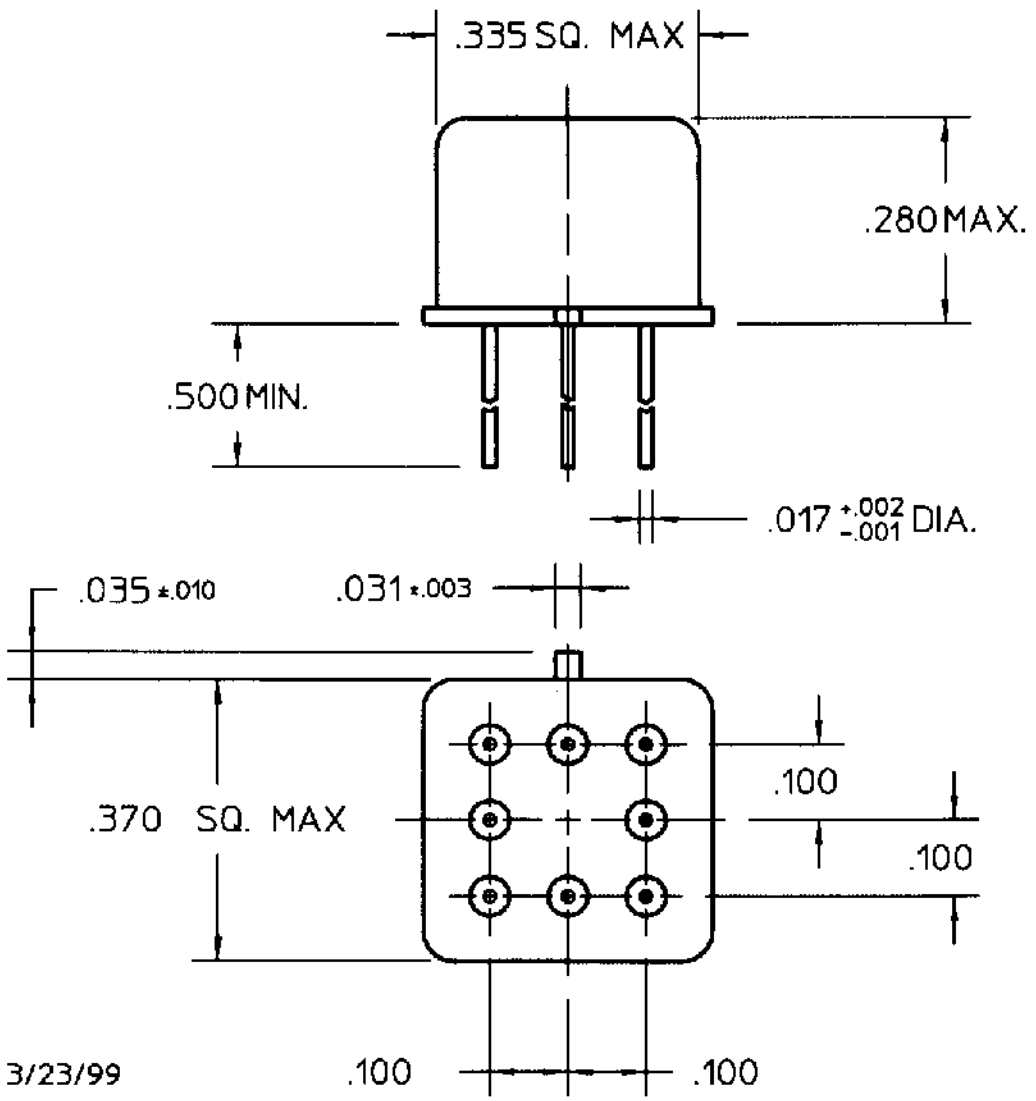



REV. 1 3/23/99
DCO 140960

COIL: @ 25°C

| | |
|---|---|
| RESISTANCE | 50 OHMS ± 10% |
| NOMINAL VOLTAGE | 5.0 VDC |
| MUST OPERATE | 2.7 VDC |
| MUST RELEASE | 0.22 VDC |

ENVIRONMENT:


VIBRATION 10 CPS TO 3000 CPS @ 30 g's

SHOCK 75 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 2.0 MS MAX
RELEASE TIME 1.5 MS MAX
CONTACT BOUNCE 1.5 MS MAX

## CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/3/97 CK. [signature] 3-23-99

COMMUNICATIONS INSTRUMENTS, INC.

CUST. C.I.I. STD.
CUST. NO.

TYPE "MGA" RELAY

# MGAC-5

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

MGAC-5