


Downloaded from Arrow.com.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-870141	2008/07/25	Yuri	Update Drawing
C	LEN1580261	2015/05/28	Jinhai	Change Logo

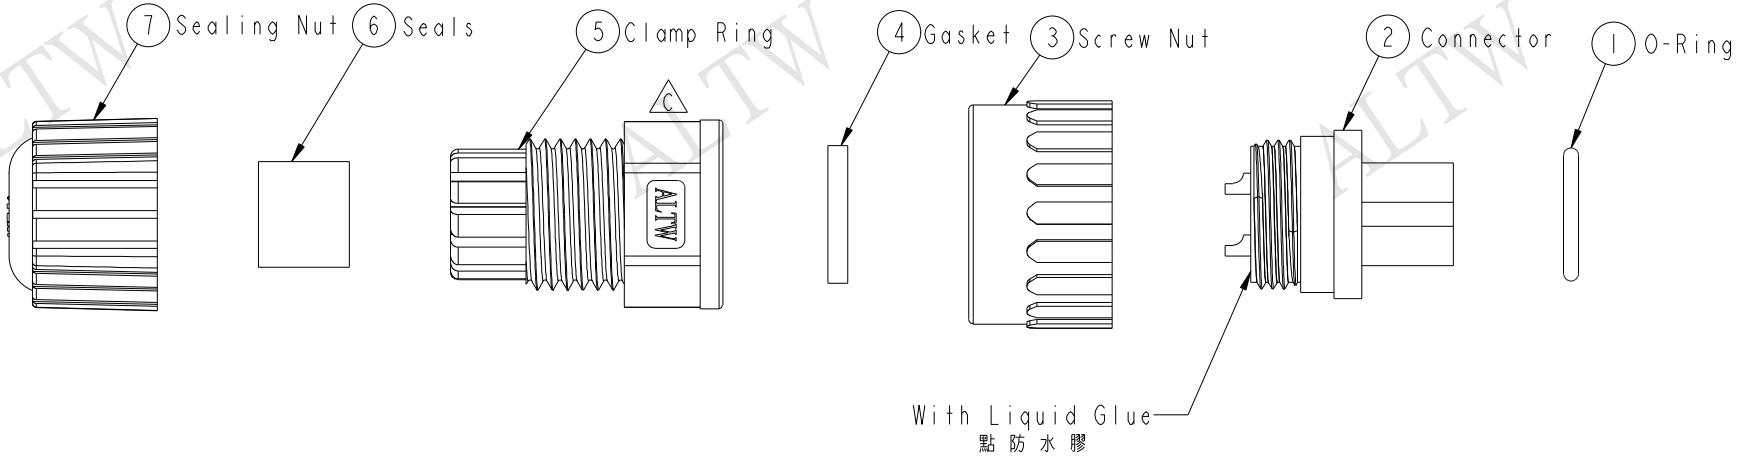

ALTW
CONFIDENTIAL
2015-05-28
R&D DEPT.



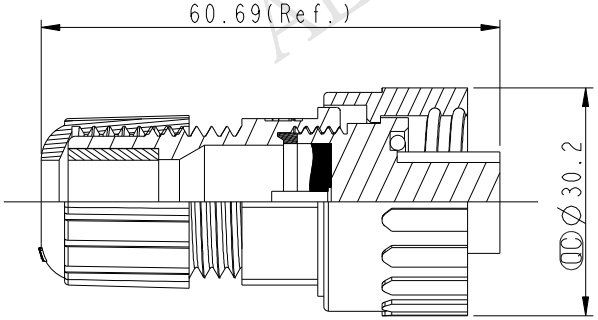



Pin Assignments
Front View 前視圖

Note:
* Waterproof Rate : IP67
* (QC) Important Dimension.
  ((QC) 爲重點檢驗尺寸)
* Seals for Cable OD:∅5.5mm~∅10.8mm
  (防水墊圈限用線徑:∅5.5mm~∅10.8mm)
* One Set Unassembled in One LTW Sealed Bag
  (每一組未組裝,放置於一個 LTW 封口袋)
* Housing:Nylon+GF, Black
* Female Pin:Copper Alloy,Gold Plated
B * Oring:EPDM, Black
* Screw Nut:Nylon+GF, Black
B * Gasket:Silicone, Black
* Clamp Ring:Nylon, Black
* Seals:EPDM, Black
* Sealing Nut:Nylon, Black

UNIT:mm
TOLERANCE
±0.5 mm

TITLE: Power,Assy Screw 2Pin F Conn F Pin
SCALE: 1:1 | SIZE: A4 | SHEET: 1 OF 1
REV.: C | WC-REV.: A.1 | (QC):Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO: PWF-02BFFA-SL7001	DRAWN BY: Jinhai	DATE: 2015-05-28
DWG NO: PWF-02BFFA-SL7001	CHECKED BY: Tom	DATE: 2015-05-28
CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2015-05-28

FMW10702-01-02A1

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

Unikeyic Electronics

Global Electronic Components Distributor

Click to view pricing, inventory, delivery, and lifecycle information:

Amphenol:

PT06J-12-3S T 3277 000 T821106A1R100CEU 122116-15 D25S24B4GV00LF FCE17-B25PM-280
97-3106A-28-8S(936) D38999/20FE35SN D38999/26ME35PN M83723/96W1624N 10124149-102LF
97-3106A-22-9P(946) L17D53018 RL0-100-1-70RE MS27467T23B53A MB5RJN0601 T 3437 000
97-3101A14S-6P AT60-14-0144 D38999/24ZJ4PA SLPHPC70BSO2 135101-02-12.00 163X10049X
65239-013LF CL90555DT52413S DBM25P032N RT001619PNH-K 115101-20-M1.00 AT60-16-0144
NPC-1220-030A1S