
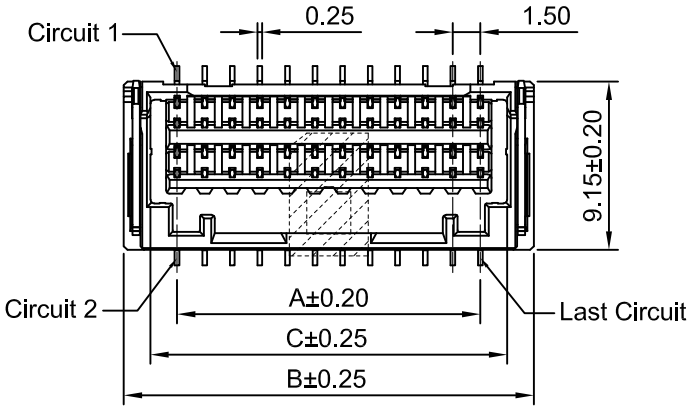


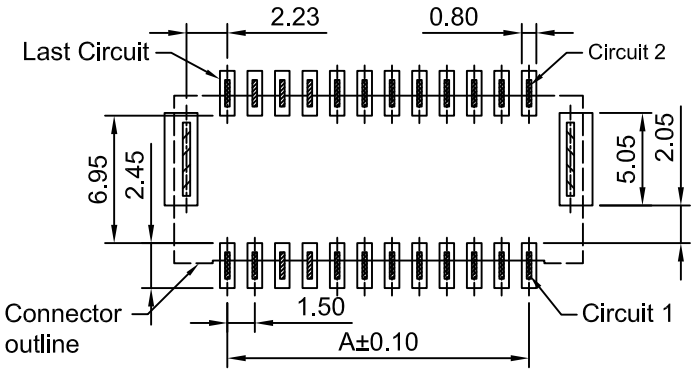


P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05


Ordering Information:

A1501WVA-S-2xXP - **
1 2

1.Part NO.
2.Finish:
(Blank): Tin over Nickel
G: Gold over Nickel (Au:1u")
G15: Gold over Nickel (Au:15u",Mating Area)
G30: Gold over Nickel (Au:30u",Mating Area)

2x10P~2x14P

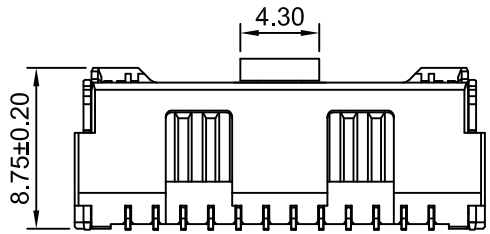

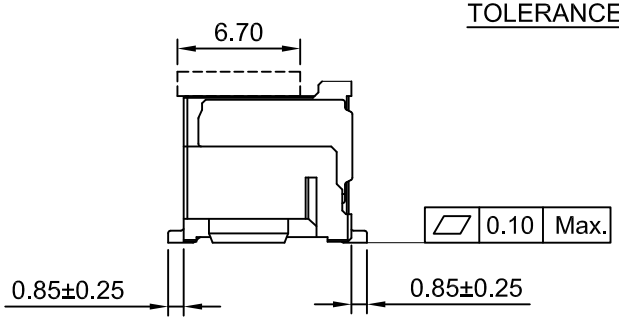


SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Stator Material: Brass/Tin over Nickel
PIN Material: Phosphor bronze
Solder tabs: Brass
Material: LCP UL94V-0(Ivory)


Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501WVA-S-2x4P	4.50	10.30	7.40
A1501WVA-S-2x5P	6.00	11.80	8.90
A1501WVA-S-2x6P	7.50	13.30	10.40
A1501WVA-S-2x7P	9.00	14.80	11.90
A1501WVA-S-2x8P	10.50	16.30	13.40
A1501WVA-S-2x9P	12.00	17.80	14.90
A1501WVA-S-2x10P	13.50	19.30	16.40
A1501WVA-S-2x11P	15.00	20.80	17.90
A1501WVA-S-2x12P	16.50	22.30	19.40
A1501WVA-S-2x13P	18.00	23.80	20.90
A1501WVA-S-2x14P	19.50	25.30	22.40

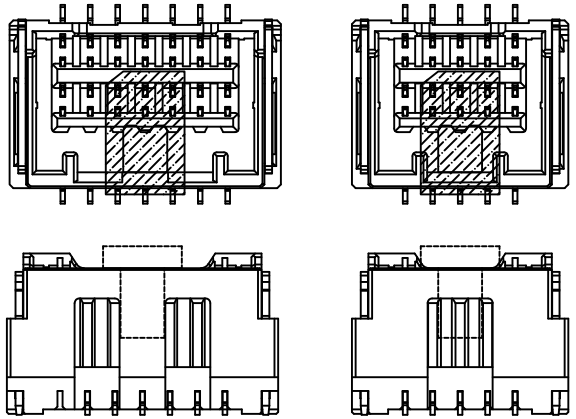

2x6P~2x9P

2x4P~2x5P

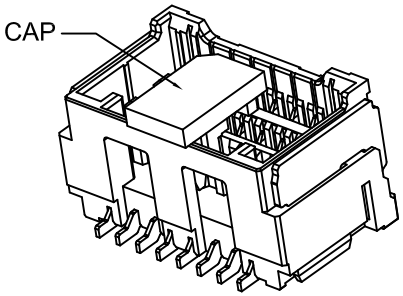

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2023.04.18
A1	CHANGE THE DRAWING	2022.04.08
A0	NEW RELEASE	2021.11.03

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2.5:1	1 of 1
DRAWN	CHK'D	APPR
Chengbiao Ye	Diankui Wan	Jack Yin

General Tolerances
x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

THIRD ANGLE PROJECTION

TITLE
1.50mm PITCH
VERTICAL DUAL ROW WAFER
- SMD TYPE

DRAWING NO.
A1501WVA-S-2xXP

REV
A2